

DALS LIGHTING

NOTES

QUICK SPECS

Light direction

Color temperature

Canada 80, de la Seigneurie blvd., E. Blainville, Quebec j7C 4N1 U.S.A. 4383, NW 124th Ave., Coral Springs, Florida 33065 877.430.1818 info@dals.com dals.com

MODEL LEDWALL-B-CC-V


NAME Brooklyn

4in Round Wall Sconce


The key design element of our new LED cylinder is the removable lens. This feature allows for three distinctive styles during installation.

PROJECT	TYPE	
DATE	QTY	



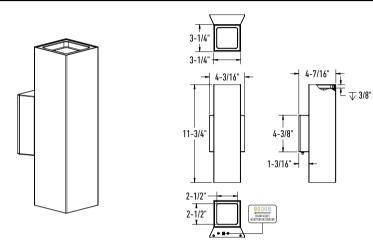

LIGHT DISTRIBUTION



*Lumen output measured at 3000k

Size	12"	Environment	Wet	
Watts (W)	28	Location	Indoor/Outdoor	
Delivered lumens*	1790	Operating temp. (° C)	-30 to 40	
CRI	90	IP rating	IP65	
Voltage (v)	120/277/347	Input voltage (V)	120-347	
Beam angle (deg)	115	Output voltage (V)	30-40	
Mounting	Screwed in	Output current (mA)	700	
Lifespan (hrs)	50 000	Power factor	90	
Binning	5 SCDM	Driver type	Constant current	
LED model	COB	THD	≤ 20%	

up and downlight

2700K/3000K/3500K/4000K/5000K

ORDERING GUIDE

LEDWALL-B-CC-V

Finish

BK - Black



Certifications

ELECTRICAL DETAILS

Lens material	Glass
Lens type	Frosted
Finish type	Powder coated
Housing material	Aluminum

ETL, FCC, ICES, T24/JA8

W	HAT'S IN THE BOX	ACCESSORIES	ADAPTORS
	LED flush mount fixture		
	Mounting bracket		
	Mounting hardware		
	Wire nuts		
	Instruction sheet		

RECOMMENDED DIMMER LIST*

BRAND	MODEL	DIMMER SPECS	GRADE	DIMMING RANGE %		MAX LOAD
Lutron	DVSTV (0-DVSTV (0-10 V Controls)*	960W, 8A, 120–277 V	Compatible	MIN 10	MAX 100	34
Leviton	IP710-DL IP710-DLZ(0-10 V Controls)	1200VA, 10A LED, 120-277V	Compatible	0	100	42
Leviton	ZS057-30 ZS057-30Z(0-10 V Controls)	1388VA, 4A , 347V	Compatible	0	100	28
Lutron	Vive PowPak Dimming Module RMJS-8T-DV-B(0–10 V Controls)	960VA, 8A, 120-277V	Compatible	9	100	34

*With Low-End Adjustment Feature

Minimal buzzing noise may occur with some dimmers

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

