



## DALS LIGHTING

Canada  
80, de la Seigneurie blvd., E.  
Blainville, Quebec J7C 4N1

U.S.A.  
4383, NW 124th Ave.,  
Coral Springs, Florida 33065

877.430.1818  
info@dals.com  
dals.com

**MODEL** LWA12-CC-V

**NAME** Aden

12in Round Wall Sconce

The key design element of our new LED cylinder is the removable lens. This feature allows for three distinctive styles during installation.



**PROJECT**

**TYPE**


**DATE**

**QTY**

**NOTES**

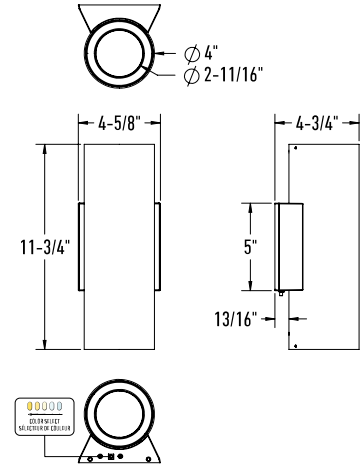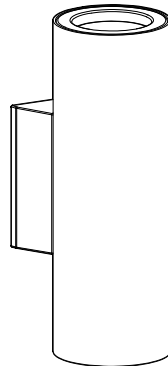

### LIGHT DISTRIBUTION

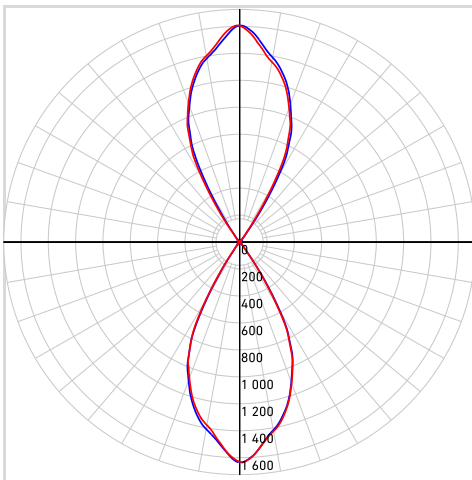

### QUICK SPECS

|                          |                               |
|--------------------------|-------------------------------|
| <b>Size</b>              | 12"                           |
| <b>Watts (W)</b>         | 30                            |
| <b>Delivered lumens*</b> | 2100                          |
| <b>CRI</b>               | 90                            |
| <b>Voltage (v)</b>       | 120/277/347                   |
| <b>Beam angle (deg)</b>  | 53                            |
| <b>Mounting</b>          | Screwed in                    |
| <b>Lifespan (hrs)</b>    | 50 000                        |
| <b>Binning</b>           | 5 SCDM                        |
| <b>LED model</b>         | COB                           |
| <b>Light direction</b>   | up and downlight              |
| <b>Color temperature</b> | 2200K/2700K/3000K/3500K/4000K |

### ELECTRICAL DETAILS

|                              |                         |
|------------------------------|-------------------------|
| <b>Environment</b>           | Wet                     |
| <b>Location</b>              | Indoor/Outdoor          |
| <b>Operating temp. (° C)</b> | -30 to 40               |
| <b>IP rating</b>             | IP65                    |
| <b>Input voltage (V)</b>     | 120-347                 |
| <b>Output voltage (V)</b>    | 30-40                   |
| <b>Output current (mA)</b>   | 700                     |
| <b>Power factor</b>          | 90                      |
| <b>Driver type</b>           | Constant current        |
| <b>THD</b>                   | ≤ 20%                   |
| <b>Certifications</b>        | ETL, FCC, ICES, T24/JA8 |

\*Lumen output measured at 3000k

### ORDERING GUIDE

LWA12-CC-V

-

Finish

**BK** - Black



### CONSTRUCTION

|                         |               |
|-------------------------|---------------|
| <b>Lens material</b>    | Glass         |
| <b>Lens type</b>        | Clear         |
| <b>Finish type</b>      | Powder coated |
| <b>Housing material</b> | Aluminum      |

## WHAT'S IN THE BOX

- LED flush mount fixture
- Mounting bracket
- Mounting hardware
- Wire nuts
- Instruction sheet

## WHAT'S IN THE BOX

- LED flush mount fixture
- Mounting bracket
- Mounting hardware
- Wire nuts
- Instruction sheet

## ACCESSORIES

## ADAPTORS

## RECOMMENDED DIMMER LIST\*

[illegible]

\*With Low-End Adjustment Feature

*Minimal buzzing noise may occur with some dimmers*

## WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to [info@dals.com](mailto:info@dals.com).