

20  
26

LIGHTING DESIGN GUIDE

dals








# **Our mission is to offer the highest level of service and quality through an innovative, functional and complete product line.**

DALS Lighting is a manufacturer of designer lighting products with a focus on innovation and emerging technologies. Our systems are showcased in lighting showrooms, retailers, electrical distributors, and e-commerce platforms. Additionally, they are specified in projects across North

America through a robust network of agents collaborating with architects, engineers, contractors, and distributors. We are dedicated to providing exceptional service, fast lead times, environmentally conscious solutions, and superior product quality.





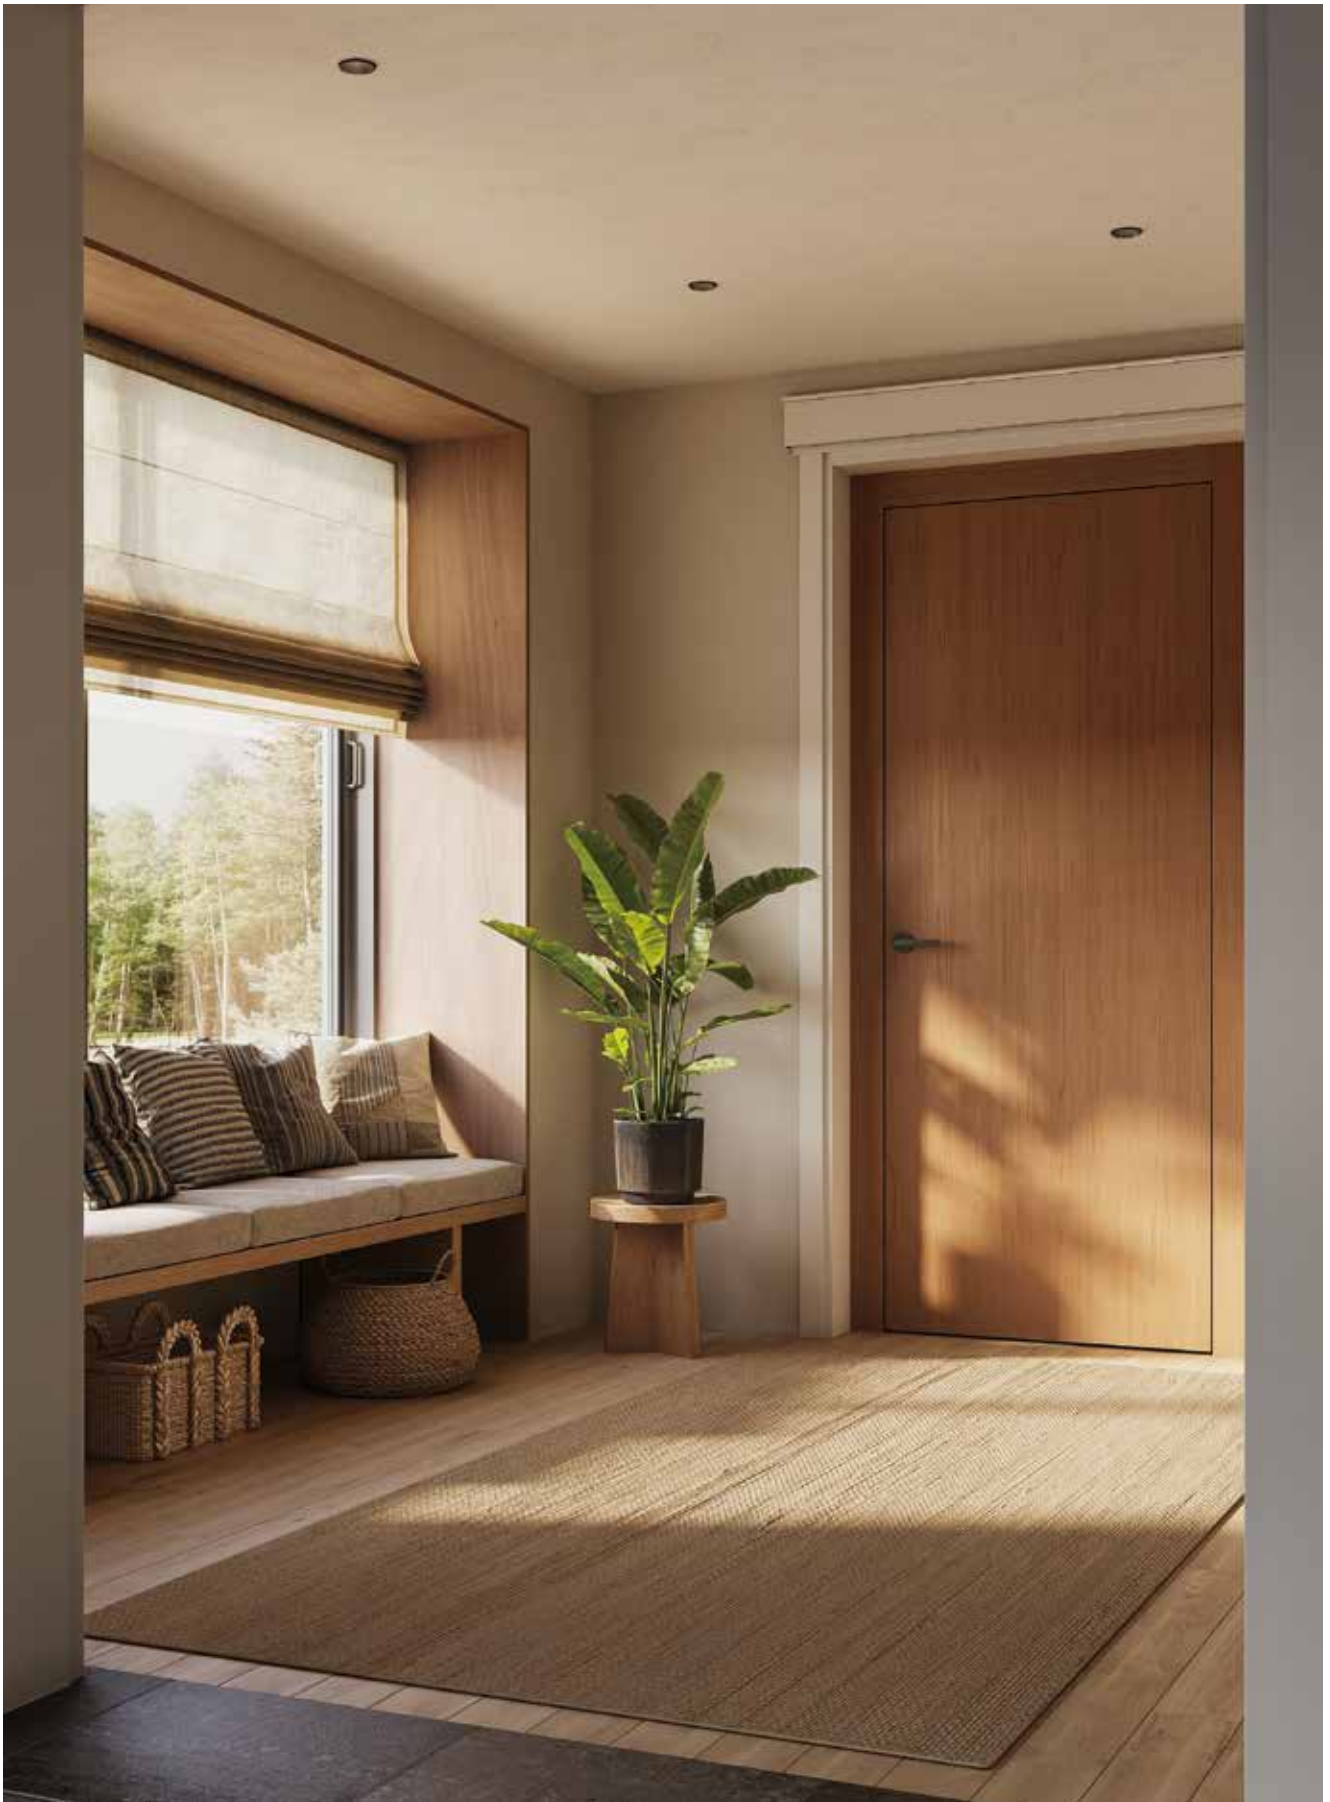



## OUR MILESTONES

### 2008

DALS Lighting Inc. was founded and quickly established itself as a leader in accent lighting by introducing an innovative LED product line.

### 2009 - 2015

Building on its early success, DALS transitioned all product lines to LED technology and prioritized best-in-class service. This focus on innovation and quality culminated in the launch of the LED Design Guide in 2015, showcasing cutting-edge products and exclusive LED solutions. DALS also opened its first LED lighting showroom at the Dallas Market Center in Dallas, Texas, solidifying its position in the North American market.

### 2016

To support continued growth, DALS moved into a new headquarters in Blainville, Quebec, Canada, and expanded its U.S. operations in Coral Springs, Florida.

### 2017-2022

DALS entered the smart home market with the launch of its smart home ecosystem, featuring connected products controlled through the DALS mobile app. A dedicated team was established to drive innovation in this category. During this period, DALS accelerated its product launch cadence, introduced the DALS Connect and DALS Connect PRO smart platforms, and expanded into landscape lighting. In 2020, the company unveiled a new atrium showroom at the Dallas Market Center, contributing to substantial growth.

### 2023-2024

In 2023, DALS doubled the size of its headquarters and main warehouse, underscoring its commitment to operational excellence and scalability. This expansion was paired with a strategic financial partnership, positioning the company for its next phase of accelerated development. In 2024, DALS launched its largest-ever product cycle and participated in LEDucation for the first time, further expanding its presence and visibility in the specification market.

### 2025

In 2025, DALS continued to build momentum across residential, commercial, and project channels. The company maintained its focus on product innovation, customer service, and execution while also welcoming Remington Lighting into the group. The integration process began steadily, with both companies continuing to operate independently while collaborating on select initiatives.

### 2026

DALS continues to expand its product offerings and market presence with a focus on delivering high-quality, design-focused lighting solutions across a wide range of applications. The company remains committed to operational excellence, innovation, and team development. As part of this growth, DALS is also working closely with Remington Lighting to align on select strategic initiatives. With a continued focus on performance and flexibility, DALS remains dedicated to providing exceptional service and value to its customers.



## Bluetooth Compatible

This smart light is Bluetooth-compatible and can be seamlessly integrated into your DALI Connect ecosystem for enhanced control and functionality.



## Coastal Rated

These fixtures resist rust, corrosion, fading, and wear from salt air, extreme temperatures, and UV exposure. Approved for 480h salt spray testing, they offer durability equivalent to 6.5 years in coastal conditions.



## Fire Rated

Fire-rated recessed lights feature fire-resistant housings and seals designed to prevent the spread of fire through ceiling or wall openings, ensuring safety and compliance with building codes.

## ADA

### ADA Compliant

The ADA sets standards for light fixture installations in public buildings. To be ADA compliant, fixtures must not extend more than 4 inches into hallways, walkways, or corridors, helping to prevent hazards for individuals with disabilities.



### CCT/Dim-to-Warm

Allows selection from multiple color temperatures and, on some models, gradually shifts from cooler to warmer light when dimmed for a more natural effect.



### DarkSky Approved

DarkSky Certified fixtures are designed to minimize light pollution by directing light downward, helping to preserve the natural night sky.



### FlexMount

The FlexMount system allows the fixture to shift from the electrical box for perfect alignment with surrounding elements such as sinks or mirrors.



### Air Tight

Air tight fixtures, tested to meet ASTM E283-04 standards, are designed to prevent air leakage through ceiling holes, improving energy efficiency and maintaining consistent indoor temperatures.



### Change Colors

The RGB+CCT color-changing light allows you to choose your favorite color to create different atmospheres or use it for general illumination, with a range from warm to cool white.



### Dry, Damp & Wet Ratings

Dry-rated fixtures are for indoor spaces without moisture but tolerate brief humidity. Damp-rated models handle occasional moisture, like above a shower. Wet-rated fixtures withstand direct water exposure with sealed protection.



### Gravity Glide

The Gravity Glide height adjustment feature allows you to easily raise or lower a pendant lamp by simply pulling or pushing the cord.

## IC

### IC Rated

"IC" stands for Insulation Contact. The IC rating indicates whether a recessed downlight is safe to come into contact with your home's insulation.



### Low-Glare

The recessed positioning of the LED module in this series of downlights effectively minimizes glare, providing a more comfortable lighting experience.



### Motion Sensor

This symbol indicates that the light fixture features responsive technology, detecting movement nearby and automatically activating the light for improved efficiency and convenience.



### Multi-Voltage

This symbol indicates that a product family offers multi-voltage drivers (120V/277V/347V) that are compatible with 0-10V dimming systems.



### Multi-Wattage

A multi-wattage light fixture is designed to offer adjustable brightness levels by incorporating varying wattages within the fixture, providing flexibility to meet different lighting needs.



### Power Stems

Quick-connect, patent-pending stems that provide power and support, allowing effortless installation, simply screw the desired length directly into the canopy, no wiring required



### Sound-Dampening

This symbol indicates that the light fixture includes sound-dampening material with an NRC of 0.8, absorbing approximately 80% of sound to help reduce echo and background noise for a quieter, more comfortable environment.



### Selectable Light Direction

This symbol indicates that the light fixture features a three-position switch, allowing users to select up light, down light, or both for versatile illumination and easy control.



### Title 24/JA8

This certification verifies that the lighting system meets California's Title 24, JA8 energy code for high-efficacy lighting and proper installation.



### Touch Tune

TouchTune technology provides push-to-change CCT for adjustable color temperature. Delivers precise illumination for recessed or surface-mounted installations.



### Universal Driver

Universal voltage driver supports 120V, 277V, or 347V input with both TRIAC and 0-10V dimming.




### Wave Tune

A motion-activated hand sensor that turns the light on/off with a wave and dims by holding your hand above it. Designed for surface mounting only, it works through surfaces up to 1.5 inches thick.







20

# INSTALLATION GUIDE



24

# MODA RC03/04/06-CC



28

# FACET RGM2/4/6-CC



30

# NEST ATR02/03/04-CDW



32

# RGR RGR1/2/4/6-CC RGR2/4-HP RGR4/6SQ-CC



36

# NOTCH DRR2/4/6-CC



38

# PINPOINT SERIES MSL1/2/4/5/10/5G/10G




42

# ETCH DDP4/6-CC DCP-DDP4/6



44

# INDIRECT IND4/6



46

# HILUX HPD4/6/8-CC




48

# BOULEVARD LNR24/48-CC DCP-LNR24/48



50

# APERTURE MFD03-CC




52

# HORUS GSP3-CC



54

# REVOLVE GBR35/04/06-CC GBR35/04/06-DW GBR35SQ-CC GBR35-CC-DUO/TRIO DCP-GBR35



58

# PIVOT FGM4-3K FGM2/3/4/6 FGM4/6 SQ-CC FGM4-CC-DUO/TRIO DCP-FGM4



62

# SCOPE LEDDOWNG3-CC GMB2/4-CC



64

# EXCEL 5003/4/5/6-CC 5004SQ-CC DCP-PNL4/6



66

# REACH PNL4/6-CC PNL4/6-CC-K12



68

# ALTER RTJB4-3K RTJB3/4-CC



70


# EMERGENCY DRIVERS REC-EMD08/15



72

# ACCESSORIES

24 V




80

**INSTALLATION  
GUIDE**



82

**PUSH-PUCK**  
4024R-CC  
4024S-CC



84

**COB-TAPE**  
COBTP24V-K10 / 20FT  
COBTP24V-R50 / 100FT



282

**GLOW**  
DCP-TAP10 / 20 / 50FT



86

**24V DRIVERS**  
DR2412 / 24 / 48 /  
60 / 96DIM



87

**24V COMPACT DRIVERS**  
PLD2412/ 24 / 48DIM



88

**WAVE TUNE**  
USW3



89

**SLIDE 24V**  
DD2448



105


**24V ACCESSORIES**

12 V



90

**SUPER-PUCK**  
4001-CC



91

**DUO-PUCK**  
4005-CC  
K4005-CC



92

**MINI-PUCK**  
LEDRDM1



93

**ECO-PUCK**  
LEDROP18



94

**COB-TAPE**  
COBTP3M / 5M  
COBTP-REEL



96

**SLIDE 12V**  
DD1260



97

**12V DRIVERS**  
BT06 / 12 / 24DIM-IC  
BT36 / 48DIM



102

**12V ACCESSORIES**

120 V



98

**POWERLED PUCK**  
6001-CC



99

**POWERLED LINEAR**  
6009CC / 6012CC /  
6024CC / 6036CC /  
6048CC



100

**COUNTERLED LINEAR**  
9009CC / 9012CC /  
9018CC / 9024CC /  
9030CC




106

**120V ACCESSORIES**







112

**PILLAR**

PIL08 / PIL42-CC



118

**FUSION**

TLPF12 / TLPF21-CC



120

**NAPA**

NAPF20 / NAPF30-CC



122

**IRIS**

IRPD-CC



124

**BOULEVARD PENDANT**

LNPD48-CC  
LNPDSC48-CC  
DCP-LNPD48



128

**PINPOINT**

MSLPD48 /  
MSLPD72-CC



130

**BEAM**

SPD48 / SPD72-CC



132

**CURRENT**

SLPD60-CC



134

**TWIRL**

TWPD-CC



136

**ATOM PENDANT**

FPD60-CC



136

**ATOM ONE**

FPD-CC



138

**CIRCA**

RGPD24-CC



140

**PYRA**

TRPD34-CC



142

**ASTERISK**

SSPD32-CC



144

**NOVA**

PDC18-CC



146

**FOCUS**

CYL05-CC  
CYL06-CC-V



124


**BOULEVARD  
FLUSH MOUNT**  
LNFM48-CC



142

**ASTERISK**

FLUSH MOUNT  
SSFM20-CC



120

**NAPA**

FLUSH MOUNT  
NAPF20 / NAPF30-CC



140

**PYRA**

FLUSH MOUNT  
TRFM22-CC



148

**AURORA**

CFH12 / CFH21-CC



150

**ORA**

CFG13-CC



152

**FUSION**

FLUSH MOUNT  
TLFM12 / TLFM21-CC



154

**DELTA**

CFLEDR 6/10/14/18/24-CC  
CFLEDSQ6/10/14-CC



158

**RADIANCE**

FMM09 / FMM12-CC



160

**PRIME**

FMP05-CC  
FMP05M-CC  
FMP09/12-CC



162

**SHIFT**

VA032 / VA024-CC



164

**LEDGE**

VAL24-CC  
VAL36-CC



166

**ARIA**

VSW24 / VSW36-CC



168

**LYRA**

LEDVAN003-CC-24 / 32



170

**PORTRAIT**

VLG24 / VLG36-CC



172

**NOBLE**

LEDVAN001-CC-18 / 24



174

**BALANCE**

VCC24 / VCC36-CC



176

**VELA**

VAN002-CC-22 / 46



124

**BOULEVARD WALL**

LNWS48-CC



178

**PILLAR WALL**

PILW24-CC-UNV



182

**ADEN**

LWA12-CC  
LWS12-CC-V



184

**BROOKLYN**

LWB12-CC  
LWB12-CC-V



186

**PROFILE**

LWJ08 / LWJ16 /  
LWJ24-CC



128

**PINPOINT WALL**

MSLWALL-CC



188

**GEMINI**

SWS24 / SWS36 /  
SWS48 / SWS60-CC



190

**MIDNIGHT**

RWS24 / RWS48 /  
RWS60-CC



192

**SHIELD**

DSWC05-CC  
DSWC07-CC-V



194

**GENEVA**

LEDWALL-G-CC



196

**HARLOW**

LEDWALL-H



198

**CUBIX**

LEDWALL001D-CC



200

**ALTO**

SQS06/10/15



286

**FRAME**

DCP-CGWS



202

**RISE**

LSTP12-CC



200

**ALTO STEP**


SQSTP-CC



204

**ECHO**

LEDSTEP002D-CC



206

**PEARL**

LEDSTEP004D-CC



208

**CAMBER**

LEDSTEP005D-CC



210

**ASCEND**


LSTP07-CC



212

**GLAM**


RTL-3C




214

**ACCESSORIES**


12 V



219  
**CONNECTION  
GUIDE**




222  
**SPOT**  
LSP3-CCL  
LSP4-CCL



224  
**SLIM SPOT**  
LSS10-CC




226  
**EDGE**  
LSQP-CC



228  
**FLUX**  
LPP20-CC



230  
**COLUMN**  
LRB20-CC  
LRB30-CC




232  
**SOL**  
GRD2-CC



234  
**CONTOUR**  
LHS07-CC



236  
**TRANSFORMERS**  
LTRP-60  
LTR-300



268  
**ACCESSORIES**

120 V




238  
**STATURE**  
LEDPATH004D



252  
**HORIZON MAX**  
DCP-FLD100


24 V



244  
**ORBIT**  
DCP-SPT6



246  
**GAÏA**  
DCP-CPL24



248  
**AXIS**  
DCP-STK20  
DCP-STK50



250  
**ACUTE**  
DCP-45HP20



254  
**HORIZON**  
DCP-FLD30




256  
**MASON**  
DCP-BRK12




258  
**CONTOUR PRO**  
DCP-LHS12



260  
**FLEX**  
DCP-NFTAP5M



262  
**ORION**  
DCP-STG48



264  
**KAYU**  
DCP-RK10  
DCP-RK18



266  
**TRANSFORMERS**  
DCP-MTR60  
DCP-MTR300



273

CONNECTION  
GUIDE



276

HUB  
DCP-HUBV2



278

CLICC  
DCP-RMCT




280

DIMMER SWITCH  
SM-DIMSW



282

BULBS  
DCP-BLBA21  
DCP-BLBBR30



284

GLOW  
DCP-TAP10FT  
DCP-TAP20FT  
DCP-TAP50FT




158

RADIANCE  
DCP-FMM12



58

PIVOT  
DCP-FGM4



54

REVOLVE  
DCP-GBR35



42

ETCH  
DCP-DDP4  
DCP-DDP6



64

EXCEL  
DCP-PNL4  
DCP-PNL6



48

BOULEVARD  
DCP-LNR24  
DCP-LNR48



124

BOULEVARD  
PENDANT  
DCP-LNPD48



286

FRAME  
DCP-CGWS



RECESSED





20

**INSTALLATION  
GUIDE**



24

**MODA**  
RC03/04/06-CC



28

**FACET**  
RGM2/4/6-CC



30

**NEST**  
ATR02/03/04-CDW



32

**RGR**  
RGR1/2/4/6-CC  
RGR2/4-HP  
RGR4/6SQ-CC



36

**NOTCH**  
DRR2/4/6-CC



38

**PINPOINT SERIES**  
MSL1/2/4/5/10/5G/10G



42

**ETCH**  
DDP4/6-CC  
DCP-DDP4/6



44

**INDIRECT**  
IND4/6



46

**HILUX**  
HPD4/6/8-CC



48

**BOULEVARD**  
LNR24/48-CC  
DCP-LNR24/48



50

**APERTURE**  
MFD03-CC



52

**HORUS**  
GSP3-CC



54

**REVOLVE**  
GBR35/04/06-CC  
GBR35/04/06-DW  
GBR35SQ-CC  
GBR35-CC-DUO/TRIO  
DCP-GBR35



58

**PIVOT**  
FGM4-3K  
FGM2/3/4/6  
FGM4/6 SQ-CC  
FGM4-CC-DUO/TRIO  
DCP-FGM4



62

**SCOPE**  
LEDDOWNG3-CC  
GMB2/4-CC



64

**EXCEL**  
5003/4/5/6-CC  
5004SQ-CC  
DCP-PNL4/6



66

**REACH**  
PNL4/6-CC  
PNL4/6-CC-K12



68

**ALTER**  
RTJB4-3K  
RTJB3/4-CC



70


**EMERGENCY  
DRIVERS**  
REC-EMD08/15



72

**ACCESSORIES**



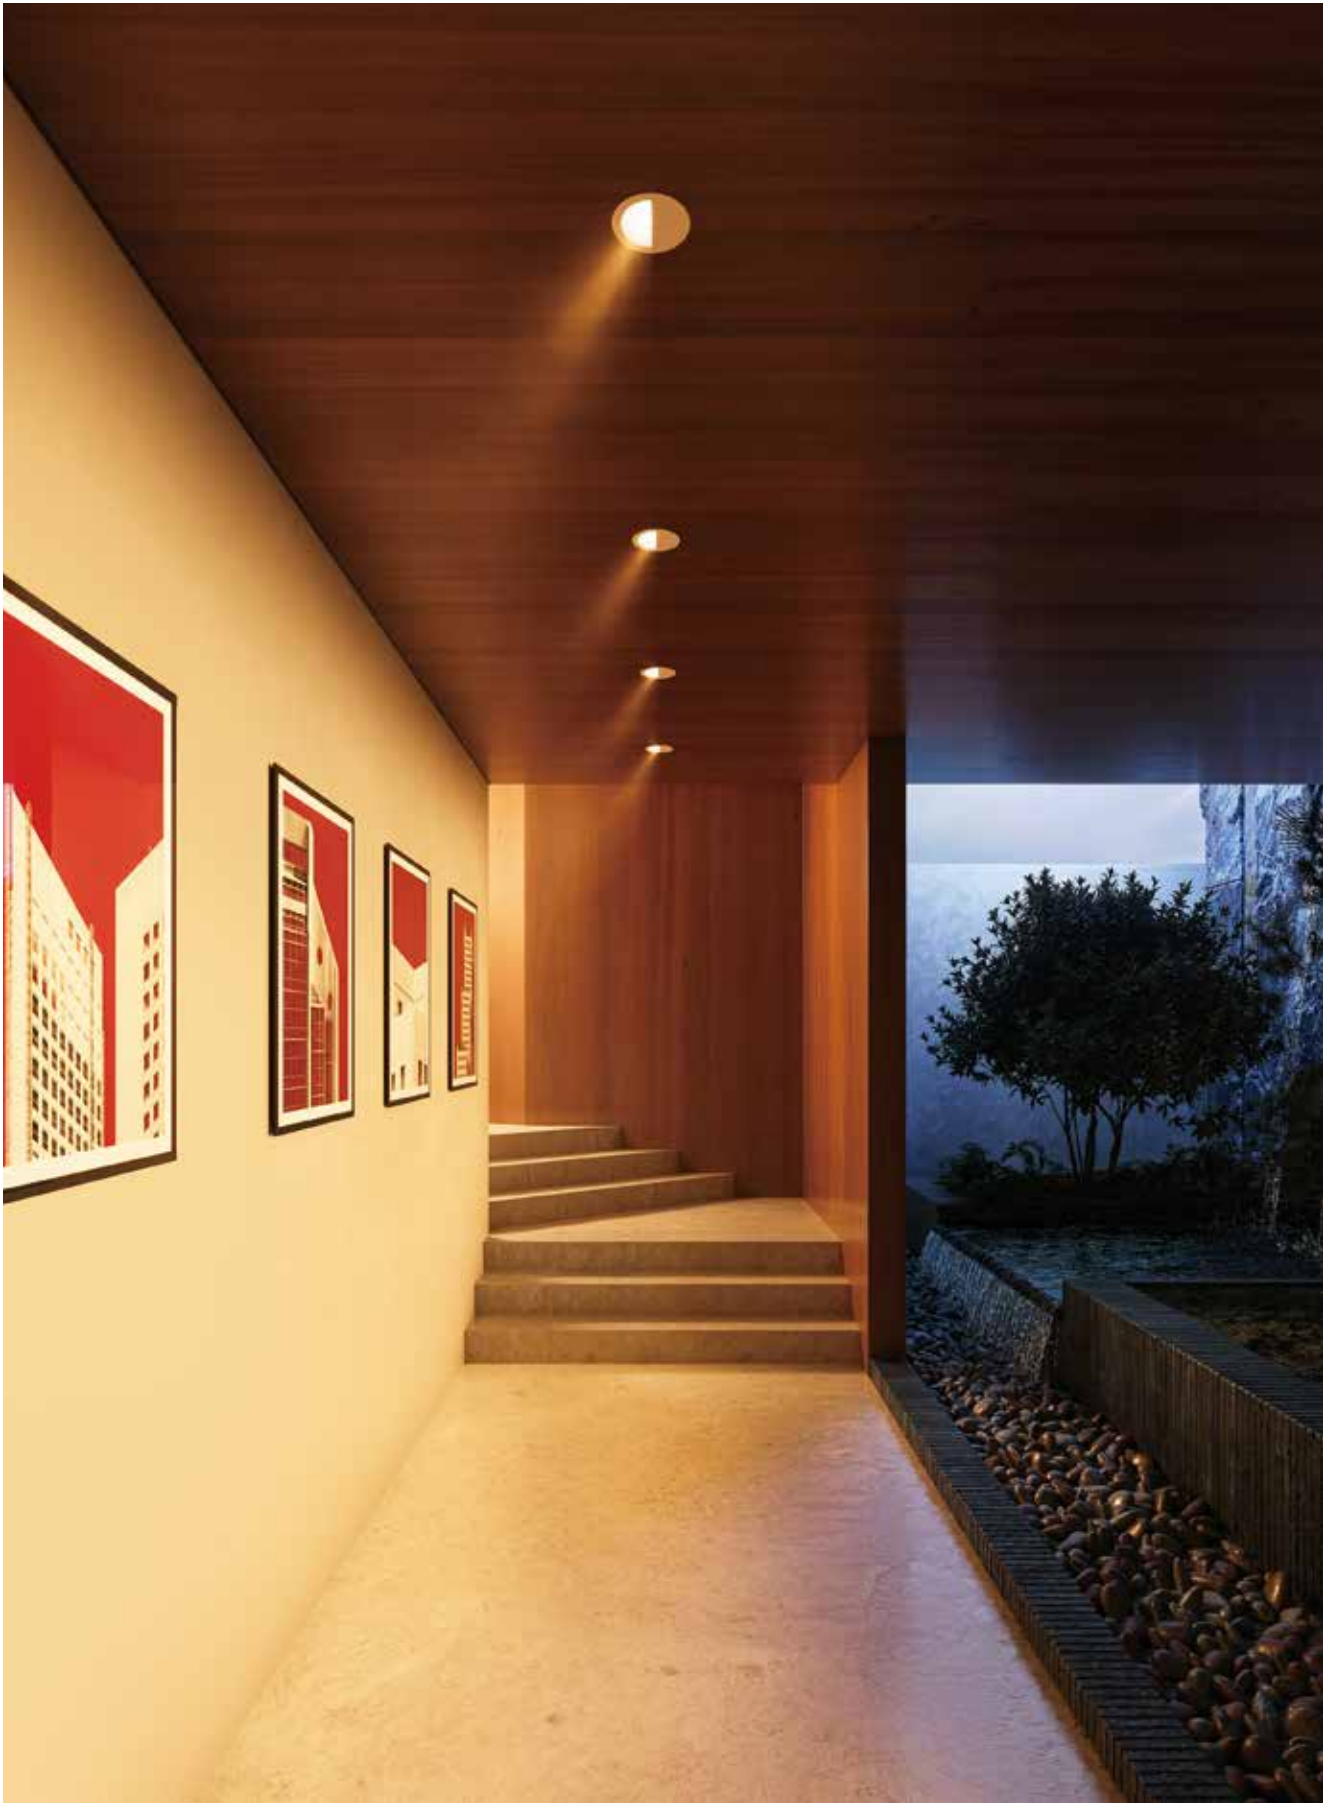


# Proper Sizing, Spacing and Downlighting Techniques

Panels, spotlights, downlights, recessed lights are among the most versatile lighting options available. Their most common application, and the focus here, is recessed downlighting from the ceiling.


## The components

Our recessed kits include two main components: the driver and the fixture.




### The driver (A)

is what is recessed into the ceiling and consists of the electrical parts that bring power to the light.

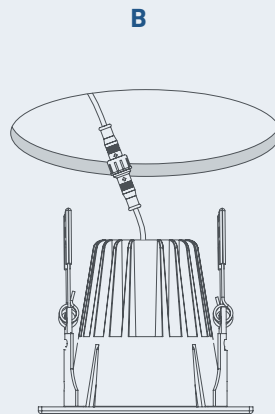

### The fixture (B & C)

is what's visible to people in the room and gives the light its aesthetic.




**GOOD  
TO KNOW!**

Fixtures and drivers are sized to correlate with one another and are sold together with all of our recessed lights.

### Installation type

What fixture you choose starts with knowing whether it will be used in a new construction, a remodel or as a retrofit.

**D**

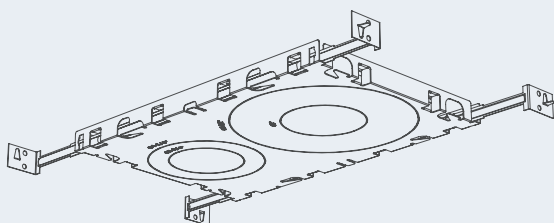


#### New construction

Locations with visible ceiling joists and without drywall. Lights can be used with our rough-in plates (**D**) to help in the installation process.

#### Remodels

When the joists are not exposed or if you want to upgrade your current system to LED.

**E**

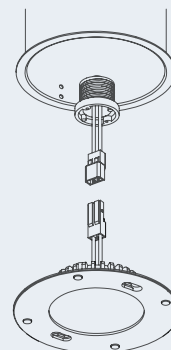

#### Retrofit

When an existing bulb is removed from the original housing, and replaced with an LED trim (**E**).

**GOOD  
TO KNOW!**

Most of DALI's recessed fixtures are designed for both new construction and remodels. They are installed through a small ceiling opening and secured with clips.


**GOOD  
TO KNOW!**

A rough-in plate is used for new construction or renovations with exposed ceiling framing. It ensures proper placement of your recessed light and is made from durable galvanized steel.

# How Many Downlights Do I Need?

Did you know that proper spacing can dramatically improve both the look and function of your recessed lighting? Following simple guidelines ensures even illumination and a balanced, comfortable atmosphere in any room.

## Example configuration

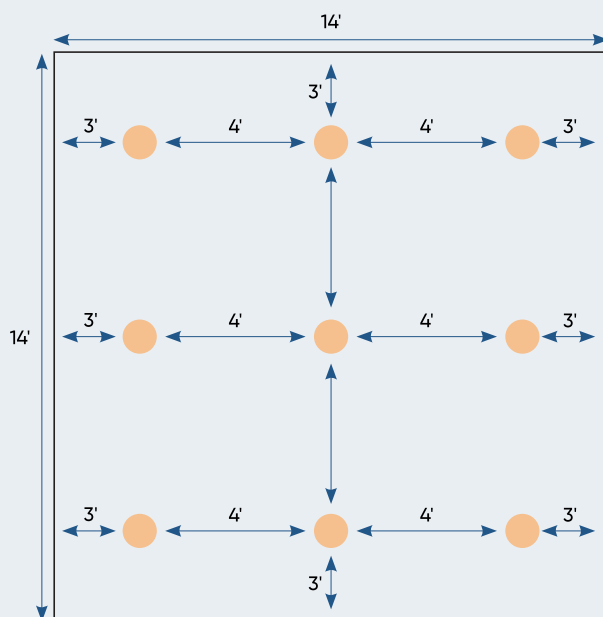

**A simple method for estimating the number of downlights needed is as follows:**

Recessed downlights are typically placed 2 to 3 feet from walls, with 3 to 4 feet between each fixture.

Another guideline is to divide the ceiling height by two to determine spacing between lights.

**For example, an 8-foot ceiling would call for lights spaced 4 feet apart.**



In Canada, 4" recessed lights are the most popular, in the U.S., 6" are most commonly used.

# Standard, Multi-Voltage, or Universal Driver?

Did you know that most of our recessed lighting fixtures are available with a choice of drivers: Standard 120V or Multi-Voltage options including 120V, 277V, and 347V?

**Driver type** Look for these keywords to quickly identify the specified voltage for each fixture throughout the catalog.

### 120V Standard

A standard North American system delivering 120 VAC power to residential lighting fixtures and installations.

|                  |                                |
|------------------|--------------------------------|
| <b>Voltage</b>   | 120V only                      |
| <b>Dimming</b>   | TRIAC dimming                  |
| <b>Ideal for</b> | Residential & light commercial |

### Multi-Voltage

A commercial-grade system that supplies 120V, 277V, or 347 VAC power for lighting installations.

|                  |                  |
|------------------|------------------|
| <b>Voltage</b>   | 120V, 277V, 347V |
| <b>Dimming</b>   | 0-10V dimming    |
| <b>Ideal for</b> | Commercial       |

### Universal

A commercial-grade system that supplies 120V, 277V, or 347 VAC power out of the box, with both TRIAC and 0-10V dimming options.

|                  |                          |
|------------------|--------------------------|
| <b>Voltage</b>   | 120V, 277V, 347V         |
| <b>Dimming</b>   | TRIAC and 0-10V dimming  |
| <b>Ideal for</b> | Residential & Commercial |



Universal drivers support both TRIAC and 0-10V dimming, offering maximum flexibility for controlling light intensity in any installation.

# MODA

A versatile recessed lighting solution available in three-, four-, and six-inch sizes, featuring customizable finishes, trims, lenses, and reflectors, with options for standard, sloped ceiling, and trimless installations, all with multi-voltage compatibility. Perfect for commercial or residential spaces.

## EXPANDED FLEXIBILITY!

Now upgraded with a gimbal reflector and wall-wash trim, Moda adds 154 new configuration options for greater design flexibility.

## LIGHT ENGINE

Includes an LED module, a heatsink for efficient cooling, a lens holder for light distribution, and a rotating dial at the top to select the color temperature.

## REFLECTOR

Sits inside the trim. Available in three options: standard, sloped ceiling, and gimbal. Comes in four finishes: Alzak, black, gold, and white.

## RC04-CC

## DRIVER

Converts mains voltage (120V/277V/347V) to the appropriate current for the LEDs, featuring multiple dimming capabilities, including Triac and 0-10V dimming, for added flexibility.

## LENS

Sits below the light engine and shapes the light to create the desired beam angle. Available in 20°, 35°, and 60° angles.

## TRIM

The visible part framing the light opening. Flanged trim has a defined edge, while trimless blends seamlessly with the ceiling. New wall-wash trims provide directional, wall-focused illumination.

NEW



COLOR SELECT



MULTI-WATTAGE



WET



SWIVEL/DIRECTIONAL



LOW-GLARE



UNIVERSAL DRIVER



CUSTOMIZE



IC RATED



T24 JA8 CERTIFIED



## RC03-CC



## RC04-CC



## RC06-CC



## ORDERING GUIDE

| Prefix | Light module                  | Beam angle                | Reflector type                                                             | Reflector finish | Trim style                  |
|--------|-------------------------------|---------------------------|----------------------------------------------------------------------------|------------------|-----------------------------|
| RC     | <b>03-CC</b> 3" module/1000lm | <b>20</b> 20° narrow beam | <b>RG</b> Regular ceiling                                                  | <b>AZ</b> Alzak  | <b>TL</b> Round trimless    |
|        | <b>04-CC</b> 4" module/2000lm | <b>35</b> 35° medium beam | <b>SL</b> Sloped ceiling                                                   | <b>BK</b> Black  | <b>TBK</b> Round black trim |
|        | <b>06-CC</b> 6" module/3000lm | <b>60</b> 60° wide beam   | <b>GMB</b> Gimbal                                                          | <b>GD</b> Gold   | <b>TGD</b> Round gold trim  |
|        |                               |                           |                                                                            | <b>WH</b> White  | <b>TWH</b> Round white trim |
|        |                               |                           | <b>WW</b> Wall wash*                                                       | <b>BK</b> Black  | -                           |
|        |                               |                           | The wall wash option integrates the reflector and trim into a single unit. | <b>WH</b> White  | -                           |

|    |       |   |    |   |    |    |   |     |
|----|-------|---|----|---|----|----|---|-----|
| RC | 04-CC | - | 20 | - | RG | BK | - | TBK |
|----|-------|---|----|---|----|----|---|-----|

## RC04-CC-20-RGBK-TBK



NEW

# MODA

A versatile recessed lighting solution available in three-, four-, and six-inch sizes, featuring customizable finishes, trims, lenses, and reflectors, with options for standard, sloped ceiling, and trimless installations, all with multi-voltage compatibility. Perfect for commercial or residential spaces.



COLOR SELECT



MULTI-WATTAGE



WET



SWIVEL/DIRECTIONAL



LOW-GLARE



UNIVERSAL DRIVER



CUSTOMIZE

IC  
RATED

CERTIFIED




| Model   | Size | Watts      | Delivered lumens | CRI | Color °T                       | Voltage ⚡                                   |
|---------|------|------------|------------------|-----|--------------------------------|---------------------------------------------|
| RC03-CC | 3"   | 8/10/12 W  | 1000 lm          | 90  | 2700, 3000, 3500, 4000, 5000 K | 120 / 277 / 347V<br>Triac and 0-10V dimming |
| RC04-CC | 4"   | 16/20/24 W | 2200 lm          |     |                                |                                             |
| RC06-CC | 6"   | 24/30/36 W | 3000 lm          |     |                                |                                             |



## RC03-CC

Ø3-1/2" 





## RC04-CC

Ø4-1/4" 



## RC06-CC

Ø6" 



### Specifications

Every fixture includes a junction box with integrated dimmable driver

Multi-watt output allows you to choose from three wattage settings for customizable brightness directly on the jbox

Can be daisy chained

Aluminum construction

Rotary dial CCT switch

20°, 35°, or 60° beam angles

40° tilting, 360° rotation

5-year warranty

### Accessories

**RFP-35**  
Rough-in plate for 3" model

**RFP-46**  
Rough-in plate for 4" models

**RFP-UNI**  
Rough-in plate for 4" models

**RFP-RC06**  
Rough-in plate for 6" models

**REC-CC-EXT8FT**  
8-foot extension cable

**REC-CC-EXT20FT**  
20-foot extension cable

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALS representative for more information.

# FACET

This versatile modern thin-trim 2, 4 and 6-inch gimbal with multi-directional adjustable swivel produces a bright glow with minimal glare as a result of its regressed light source. Ideal for general lighting or for areas requiring a directional light to showcase unique elements or to create dramatic wall-wash effects.




| Model   | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage options ⚡                                                      |
|---------|------|-------|------------------|-----|--------------------------------|------------------------------------------------------------------------|
| RGM2-CC | 2"   | 8 W   | 710 lm           | 90  | 2700, 3000, 3500, 4000, 5000 K | 120V TRIAC dimming                                                     |
| RGM4-CC | 4"   | 14 W  | 1200 lm          |     |                                |                                                                        |
| RGM6-CC | 6"   | 20 W  | 1750 lm          |     |                                | or<br>V: 120 / 277 / 347V<br>0-10V dimming<br>(Check for availability) |

---

**RGM2-CC**

Ø2-3/4"




3"

Ø3-1/8"

---

**RGM4-CC**

Ø4-1/4"




3-1/2"

Ø4-1/2"

---

**RGM6-CC**

Ø6-1/2"



3-1/2"

Ø6-3/4"



---

**Specifications**

Every fixture includes a junction box with integrated dimmable driver

Can be daisy chained

Aluminum construction

Switch-selectable CCT

40° beam angle

30° tilting, 360° rotation

5-year warranty

---

**Finish**

● **BK** Black

○ **WH** White

---

**Accessories****RFP-UNI**

Universal rough-in plate

**RFP-23**

Rough-in plate for 2" model

**RFP-46**

Rough-in plate for 4" and 6" models

**REC-CC-EXT8FT**

8-foot extension cable

**REC-CC-EXT20FT**

20-foot extension cable

---

**Multi-voltage (V) ⚡**


This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# NEST

The Nest series of recessed fixtures offers an “almost trimless” design for a clean, minimal appearance. Available in 2”, 3”, and 4” sizes, each fixture features 5CCT Color Select and Dim-to-Warm technology, both controlled from the same switch on the transformer, delivering versatile illumination and precise ambiance control.



COLOR SELECT +



WET



LOW-GLARE



AIR TIGHT

IC

RATED

T24  
JA8


CERTIFIED



| Model     | Size | Watts | Delivered lumens | CRI | Color °T                             | Voltage |
|-----------|------|-------|------------------|-----|--------------------------------------|---------|
| ATR02-CDW | 2"   | 8 W   | 650 lm           | 90  | 6 CCT: 2700, 3000, 3500, 4000, 5000K | 120 V   |
| ATR03-CDW | 3"   | 10 W  | 800 lm           |     | +                                    |         |
| ATR04-CDW | 4"   | 14 W  | 1220 lm          |     | Dim-to-Warm (3000 - 2200K)           |         |

**ATR02-CDW**

Ø2-3/4"




3-1/8"

Ø3"

**ATR03-CDW**

Ø3-3/8"



3-3/8"

Ø3-5/8"

**ATR04-CDW**

Ø4-1/4"



3-13/16"

Ø4-1/2"

**Specifications**

Every fixture includes a junction box with an integrated driver

6 CCT: 2700, 3000, 3500, 4000, 5000K + Dim-to-Warm (3000–2200K) integrated in a single unit

Can be daisy chained

Smooth 360° wide spread

24° beam angle

Frosted lens further reduces glare and creates a seamless white appearance over the COB module

5-year warranty

**Finish**

● **BK** Black

○ **WH** White

**Accessories****RFP-23**

Rough-in plate (ATR02-CDW, ATR03-CDW)

**RFP-46**

Rough-in plate (ATR04-CDW)

**RFP-UNI**

Universal rough-in plate

**REC-CDW-EXT8FT**

8-foot extension cable

**REC-CDW-EXT20FT**

20-foot extension cable

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# RGR

When choosing a recessed fixture, eliminating glare is a priority. The unique positioning of the LED module in this series of downlights will meet that important need.

RGR6-CC



RGR1-CC



RGR2-CC



RGR4-CC





\*Energy Star certification applies to all models except RGR1-CC

# RGR

When choosing a recessed fixture, eliminating glare is a priority. The unique positioning of the LED module in this series of downlights will meet that important need.



WET



LOW-GLARE



AIR TIGHT



RATED



CERTIFIED



| Model     | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage options ⚡                                          |
|-----------|------|-------|------------------|-----|--------------------------------|------------------------------------------------------------|
| RGR1-CC   | 1"   | 6 W   | 450 lm           | 90  | 2700, 3000, 3500, 4000, 5000 K | 120V TRIAC dimming                                         |
| RGR2-CC   | 2"   | 8 W   | 720 lm           |     |                                |                                                            |
| RGR2HP-CC | 2"   | 14 W  | 1155 lm          |     |                                | or                                                         |
| RGR2SQ-CC | 2"   | 8 W   | 735 lm           |     |                                | V: 120 / 277 / 347V 0-10V dimming (Check for availability) |
| RGR4-CC   | 4"   | 14 W  | 1185 lm          |     |                                |                                                            |
| RGR4HP-CC | 4"   | 20 W  | 1650 lm          |     |                                |                                                            |
| RGR4SQ-CC | 4"   | 14 W  | 1140 lm          |     |                                |                                                            |
| RGR6-CC   | 6"   | 20 W  | 1940 lm          |     |                                |                                                            |
| RGR6SQ-CC | 6"   | 20 W  | 1940 lm          |     |                                |                                                            |

\*Energy Star certification applies to all models except RGR1-CC



**RGR1-CC**

Ø1-3/4"



Ø2-1/4"

**RGR2-CC**

Ø2-3/4"



Ø3-1/8"

**RGR2HP-CC**

Ø2-3/4"



Ø3-3/16"

**RGR4-CC**

Ø3-1/2"



Ø4-1/2"

**RGR4HP-CC**

Ø3-1/2"



Ø4-9/16"

**RGR6-CC**


Ø6-1/2"



Ø7"

**RGR2SQ-CC**

Ø2-3/4"




3-1/8" x 3-1/8"

**RGR4SQ-CC**

4" x 4"


Ø4-1/4"



4-1/2" x 4-1/2"

**RGR6SQ-CC**

Ø6-1/2"



7" x 7"

**Specifications**

Every fixture includes a junction box with integrated dimmable driver  
 Can be daisy chained (4" and 6" models only)  
 Aluminum construction  
 Switch-selectable CCT  
 40° beam angle  
 5-year warranty

**Finish**

- **BK** Black
- **SN** Satin Nickel (Not available for RGR1-CC and HP versions)
- **WH** White

**Accessories****RFP-01**

Rough-in plate for RGR1

**RFP-23**

Rough-in plate for RGR2, RGR2HP, RGR2SQ

**RFP-35**

Rough-in plate for RGR4, RGR4HP

**RFP-46**

Rough-in plate for RGR6, RGR4SQ & RGR6SQ

**RFP-UNI**

Universal rough-in plate for RGR2, RGR2HP, RGR2SQ, RGR4SQ, RGR6, RGR6SQ

**REC-CC-EXT8FT, REC-CC-EXT20FT**

8 ft and 20 ft extension cables

**Multi-voltage (V) ⚡**

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# NOTCH

The Notch series of regressed downlights is characterized by a deep-set LED position which greatly reduces glare, neatly packaged in a price-conscious solution to general lighting.



| Model   | Size | Watts | Delivered lumens | CRI | Color °T                          | Voltage options ⚡                                                                  |
|---------|------|-------|------------------|-----|-----------------------------------|------------------------------------------------------------------------------------|
| DRR2-CC | 2"   | 9 W   | 500 lm           | 90  | 2700, 3000, 3500,<br>4000, 5000 K | <b>120V TRIAC dimming</b>                                                          |
| DRR4-CC | 4"   | 11 W  | 1000 lm          |     |                                   |                                                                                    |
| DRR6-CC | 6"   | 14 W  | 1300 lm          |     |                                   | or<br><br><b>V: 120 / 277 / 347V<br/>0-10V dimming</b><br>(Check for availability) |

**DRR2-CC**

Ø2-3/4"



1-7/8"

Ø3-1/8"

**DRR4-CC**

Ø4-1/4"




1-13/16"

Ø4-3/4"

**DRR6-CC**

Ø6-1/2"



1-13/16"

Ø6-7/8"

**Specifications**

Every fixture includes a junction box with an integrated driver

Can be daisy chained

Smooth 360° wide spread

100° beam angle

Frosted lens

Edge lit technology

Switch-selectable CCT

5-year warranty

**Finish**

● **BK** Black

○ **WH** White

**Accessories****RFP-23**

Rough-in plate (DRR2)

**RFP-46**

Rough-in plate (DRR4, DRR6)

**RFP-UNI**

Universal rough-in plate (DRR4, DRR6)

**DRR4-TRIM-BK**

4" recessed panel trim in black

**DRR6-TRIM-BK**

6" recessed panel trim in black

**DRR6-TRIM-SBA**

6" recessed panel trim in sandblasted aluminum

**REC-CC-EXT8FT**

8-foot extension cable

**REC-CC-EXT20FT**

20-foot extension cable

**Multi-voltage (V) ⚡**

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# PINPOINT

This series provides a contemporary aesthetic and functional design to your space. Available in various styles, and framed by a powder-coat finish, these high-output fixtures deliver crisp, low-glare light.

**MSL1**



**MSL2**




**MSL4**



**MSL5**



**MSL5G**

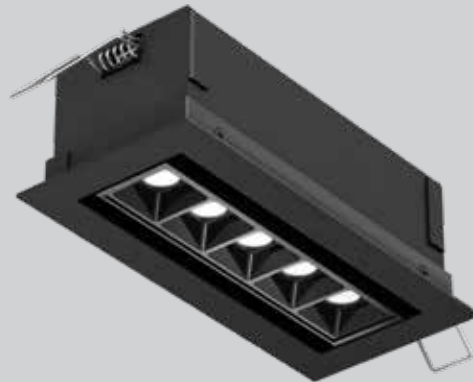

MSL10



MSL10G



COLOR SELECT



DRY



LOW-GLARE



SWIVEL/DIRECTIONAL\*

**IC**  
RATED



\*Models MSL5G-CC and MSL10G-CC only








# PINPOINT

This series provides a contemporary aesthetic and functional design to your space. Available in various styles, and framed by a powder-coat finish, these high-output fixtures deliver crisp, low-glare light.



| Model     | Size      | Watts | Delivered lumens | CRI | Color °T                          | Voltage options ⚡                                                              |
|-----------|-----------|-------|------------------|-----|-----------------------------------|--------------------------------------------------------------------------------|
| MSL1-CC*  | 1-15/16"  | 3 W   | 120 lm           | 90  | 2700, 3000, 3500,<br>4000, 5000 K | <b>120V</b><br><b>TRIAC dimming</b>                                            |
| MSL2-CC   | 3-1/8"    | 6 W   | 320 lm           |     |                                   |                                                                                |
| MSL4-CC   | 3-1/8"    | 12 W  | 600 lm           |     |                                   | or                                                                             |
| MSL5-CC   | 6"        | 14 W  | 800 lm           |     |                                   | <b>V: 120 / 277 / 347V</b><br><b>0-10V dimming</b><br>(Check for availability) |
| MSL5G-CC  | 6-3/4"    | 14 W  | 800 lm           |     |                                   |                                                                                |
| MSL10-CC  | 11-5/8"   | 24 W  | 1300 lm          |     |                                   |                                                                                |
| MSL10G-CC | 11-15/16" | 24 W  | 1300 lm          |     |                                   |                                                                                |

\*MSL1-CC is available with standard 120V voltage only

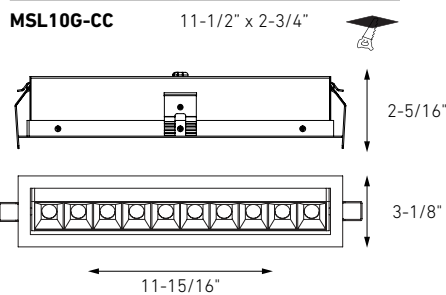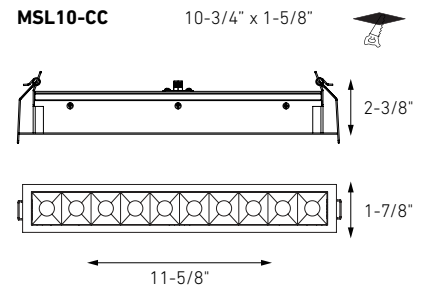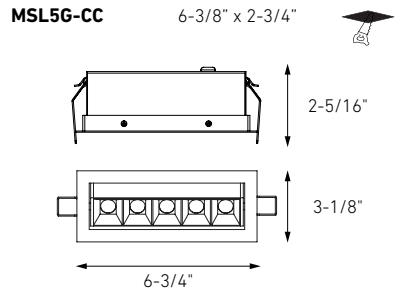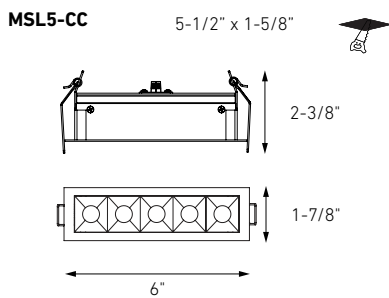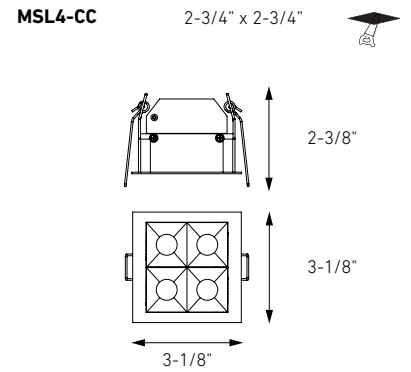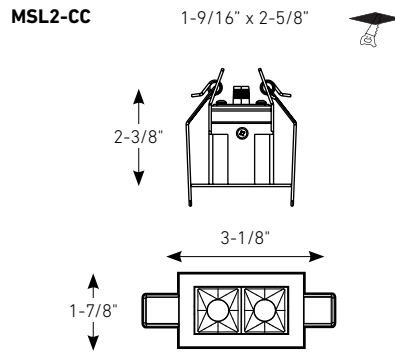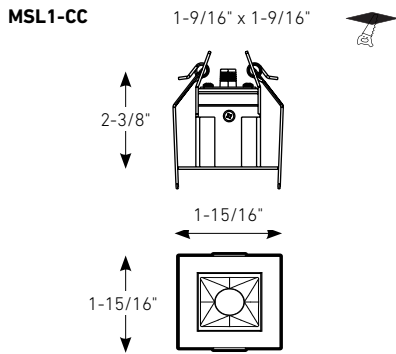

## Specifications

Every fixture includes a junction box with integrated dimmable driver  
Switch-selectable CCT  
Can be daisy chained  
Aluminum construction  
30 degree swivel (models MSL5G and MSL10G only)  
Low-glare  
5-year warranty

## Accessories

**RFP-MSL1**  
Rough-in plate for MSL1

**RFP-MSL2**  
Rough-in plate for MSL2

**RFP-MSL4**  
Rough-in plate for MSL4

**RFP-MSL5**  
Rough-in plate for MSL5

**RFP-MSL5G**  
Rough-in plate for MSL5G

**RFP-MSL10**  
Rough-in plate for MSL10

**RFP-MSL10G**  
Rough-in plate for MSL10G

**REC-CC-EXT8FT**  
8-foot extension cable

**REC-CC-EXT20FT**  
20-foot extension cable

## Finish

● **BK** Black  
○ **AWH** White

## Multi-voltage (V) ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

## Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# ETCH

The Etch range of circular recessed downlights, characterized by a deep-set LED position, provides a functional solution to general lighting without the uncomfortable glare.



DDP4-CC

DDP6-CC

DCP-DDP4



| Model    | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage options ⚡                                          |
|----------|------|-------|------------------|-----|--------------------------------|------------------------------------------------------------|
| DDP4-CC  | 4"   | 14 W  | 1430 lm          | 90  | 2700, 3000, 3500, 4000, 5000 K | 120V TRIAC dimming                                         |
| DDP6-CC  | 6"   | 20 W  | 2045 lm          |     |                                | or                                                         |
|          |      |       |                  |     |                                | V: 120 / 277 / 347V 0-10V dimming (Check for availability) |
| DCP-DDP4 | 4"   | 15 W  | 1000 lm          | 90  | RGB + 2700 K - 6500 K          | 120 V                                                      |
| DCP-DDP6 | 6"   | 20 W  | 1500 lm          |     |                                |                                                            |


\*Models DCP-DDP4, DCP-DDP6 only

\*Models DDP4-CC and DDP6-CC are Energy Star certified




**DDP4-CC, DCP-DDP4**

Ø4-1/4"

**DDP6-CC, DCP-DDP6**

Ø6-1/2"

**Specifications**

Every fixture includes a junction box with an integrated driver  
 Can be daisy chained  
 Smooth 360° wide spread  
 125° beam angle  
 Frosted lens  
 Backlit technology  
 Cast aluminum construction  
 Switch-selectable CCT  
 Full color spectrum and 2700–6500K in pure whites (DCP-DDP4, DCP-DDP6 only)  
 Dimmable via the DALI Connect app and the DCP-RMCT remote (DCP-DDP4, DCP-DDP6 only)  
 5-year warranty

**Finish**

○ **WH** White

**Accessories****RFP-46**

Rough-in plate

**RFP-UNI**

Universal rough-in plate

**DDP4-TRIM-BK**

4" recessed panel trim in black

**DDP6-TRIM-BK**

6" recessed panel trim in black

**REC-CC-EXT8FT, REC-CC-EXT20FT**

8 ft and 20 ft extension cables for CC models

**DCP-RMCT**

Smart remote for DCP-DDP4 and DCP-DDP6

**DCP-HUBV2**

DALI Connect Pro Hub for DCP-DDP4 and DCP-DDP6

**Multi-voltage (V) ⚡**

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# INDIRECT

Imagine being able to create the perfect mood when dimming your lights. This is now possible with our Dim to Warm concept, generating a warm, exquisite glow to set the tone for your evening.



DAMP



WARM DIMMING



AIR TIGHT

IC

RATED



IND4-DW

IND6-DW



| Model   | Size | Watts | Delivered lumens | CRI | Color °T        | Voltage |
|---------|------|-------|------------------|-----|-----------------|---------|
| IND4-DW | 4"   | 9 W   | 500 lm           | 80  | 3000 K - 2200 K | 120 V   |
| IND6-DW | 6"   | 12 W  | 750 lm           |     |                 |         |

**IND4-DW**

Ø4-3/8"




1-1/2"

Ø4-1/4"

**IND6-DW**

Ø6-1/4"



2"

Ø6-3/4"

**Specifications**

Every fixture includes a junction box with integrated dimmable driver

Can be daisy chained

Dim-to-warm technology, dims from 3000 K to 2200 K to mimic incandescent light

Smooth 360° wide spread

Dome reflector

110° beam spread

Indirect lighting design with glare reduction

Aluminum construction

5-year warranty

**Finish**

○ **WH** White

**Accessories****RFP-UNI**

Universal rough-in plate

**RFP-46**

Rough-in plate for 4" and 6" models

**REC-3K-EXT8FT**

8-foot extension cable

**REC-3K-EXT20FT**

20-foot extension cable

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# HILUX

DALS' high-powered recessed downlight is a go-to for your commercial projects. With its five color temperatures to choose from, a cast aluminum housing, high lumen output, and indoor/outdoor rating, this can be installed just about anywhere. From clinics to schools and hotels to boutiques, this is the only recessed fixture you will need.



COLOR SELECT



WET



LOW-GLARE



AIR TIGHT



IC RATED



CERTIFIED



| Model   | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage options ⚡                                          |
|---------|------|-------|------------------|-----|--------------------------------|------------------------------------------------------------|
| HPD4-CC | 4"   | 20 W  | 1680 lm          | 90  | 2700, 3000, 3500, 4000, 5000 K | 120V TRIAC dimming                                         |
| HPD6-CC | 6"   | 30 W  | 2805 lm          |     |                                | or                                                         |
| HPD8-CC | 8"   | 40 W  | 3270 lm          |     |                                | V: 120 / 277 / 347V 0-10V dimming (Check for availability) |

**HPD4-CC**Ø4-1/4" 

2-1/8"

Ø5"

**HPD6-CC**Ø6-1/2" 

2-1/2"

Ø7-1/4"

**HPD8-CC**Ø7-1/2" 

2-1/2"

Ø8-3/4"

**Specifications**

Every fixture includes a junction box with an integrated driver

Switch-selectable CCT

Smooth 360° wide spread

90° beam angle

Cast aluminum construction

5-year warranty

**Finish**

● **BK** Black (HPD4 and HPD6 only)

○ **WH** White

**Accessories****RFP-46**

Rough-in plate for HPD4, HPD6

**RFP-58**

Rough-in plate for HPD8

**RFP-UNI**

Universal rough-in plate

**REC-CC-EXT8FT**

8-foot extension cable

**REC-CC-EXT20FT**

20-foot extension cable

**Multi-voltage (V) ⚡**


This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# BOULEVARD

The Boulevard series, an architectural recessed lighting channel that can be installed in a wide range of commercial and residential environments. Add depth to ceiling planes with a visible separation, or seamlessly daisy-chained to create dramatic effects.

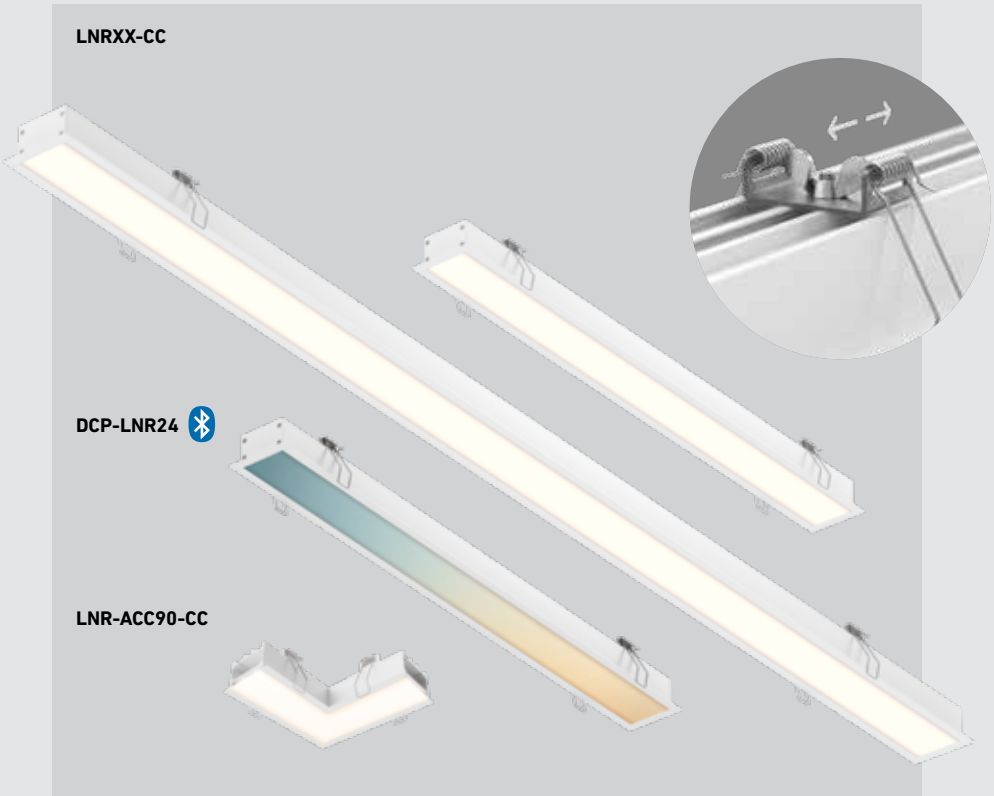

COLOR SELECT



DRY



AIR TIGHT



IC RATED

**T24  
JA8**  
CERTIFIED




| Model        | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage options ⚡                                        |
|--------------|------|-------|------------------|-----|--------------------------------|----------------------------------------------------------|
| LNR24-CC     | 24"  | 20 W  | 1725 lm          | 90  | 2700, 3000, 3500, 4000, 5000 K | <b>120V</b><br><b>TRIAC dimming</b>                      |
| LNR48-CC     | 48"  | 40 W  | 3760 lm          |     |                                |                                                          |
| LNR-ACC90-CC | 6"   | 7 W   | 500 lm           |     |                                | or<br><b>V: 120 / 277 / 347V</b><br><b>0-10V dimming</b> |
| DCP-LNR24    | 24"  | 20 W  | 1785 lm          | 90  | RGB + 2700 K - 6500 K          | 120 V                                                    |
| DCP-LNR48    | 48"  | 40 W  | 3380 lm          |     |                                |                                                          |

\*Models DCP-LNR24 and DCP-LNR48 only


**LNR24-CC**  
**DCP-LNR24**

23-1/4" x 2-1/8"



**LNR48-CC**  
**DCP-LNR48**

47-1/4" x 2-1/8"



**More from this family**



**LNP48-CC**  
pg. 124



**LNP48-CC**  
pg. 124



**LNF48-CC**  
pg. 124



**LNF48-CC**  
pg. 124



**LNP48-ACC90-CC**  
pg. 124



**Specifications**

Every fixture includes a junction box with integrated dimmable driver  
Can be daisy chained  
Aluminum construction  
Switch-selectable CCT  
108° beam spread  
Full color spectrum and 2700–6500K in pure whites (DCP models only)  
Dimmable via the DALI Connect app and the DCP-RMCT remote (DCP models only)  
5-year warranty

**Finish**

- **BK** Black (CC models only)
- **WH** White

**Accessories**

**LNACC-L16FT**

16-foot lens for Boulevard series linears

**RFP-LNR24 / RFP-LNR48**

Rough-in plates for Boulevard series linears

**REC-CC-EXT8FT, REC-CC-EXT20FT**

8 ft and 20 ft extension cables for CC models

**DCP-RMCT**

Smart remote for DCP models

**DCP-HUBV2**

DALI Connect Pro Hub for DCP models

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.



# APERTURE

Ideal for residential spaces, art galleries, or boutiques, our multi-function downlight offers versatile performance. It transitions seamlessly between recessed and spotlight modes, allows beam angle adjustments, tilts 90 degrees, and features multi-wattage settings to adapt to various lighting needs.




| Model       | Size | Watts     | Delivered lumens | CRI | Color °T                       | Voltage options ⚡                                                                                                          |
|-------------|------|-----------|------------------|-----|--------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| MFD03-MW-CC | 3"   | 8/10/12 W | 1030 lm          | 90  | 2700, 3000, 3500, 4000, 5000 K | <b>120 V TRIAC dimming</b><br><br>or<br><br><b>V: 120 / 277 / 347V</b><br><b>0-10V dimming</b><br>(Check for availability) |



## MFD03-CC

Ø3-3/8" 

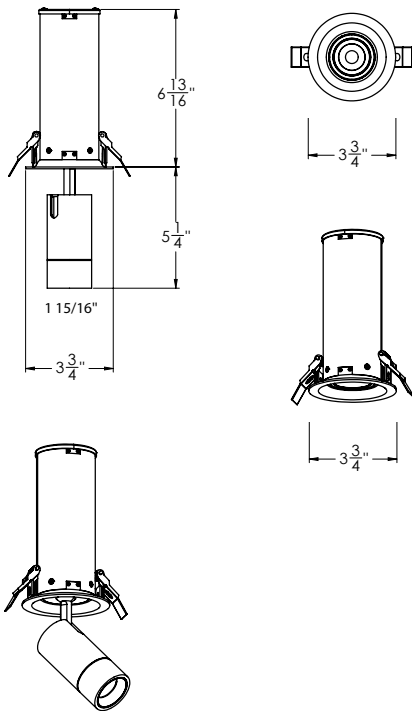

### Specifications

Every fixture includes a junction box with integrated dimmable driver  
Switch-selectable CCT  
Multi-watt output allows you to choose from three wattage settings for customizable brightness directly on the jbox  
Can be daisy chained  
90° tilting, 360° rotation  
Adjustable beam angle from 30° to 60°  
5-year warranty

### Finish

- **BK** Black
- **WH** White

### Accessories

**RFP-23**  
Rough-in plate  
**RFP-UNI**  
Universal rough-in plate  
**REC-CC-EXT8FT**  
8-foot extension cable  
**REC-CC-EXT20FT**  
20-foot extension cable

### Multi-voltage (V) ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# HORUS

A versatile lighting solution with a flexible design for precise illumination, its gimbal mechanism allows users to easily adjust the light angle, making it ideal for residential or commercial settings. The compact 3-inch size is suitable for tight spaces, and the spotlight's focused beam makes it perfect for accent lighting or task-oriented applications.



COLOR SELECT



DAMP



SWIVEL/DIRECTIONAL



AIR TIGHT

IC

RATED




| Model   | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage options ⚡                                                                                               |
|---------|------|-------|------------------|-----|--------------------------------|-----------------------------------------------------------------------------------------------------------------|
| GSP3-CC | 3"   | 12 W  | 950 lm           | 90  | 2700, 3000, 3500, 4000, 5000 K | <b>120V TRIAC dimming</b><br><br>or<br><br><b>V: 120 / 277 / 347V 0-10V dimming</b><br>(Check for availability) |



## GSP3-CC

Ø2-3/4"



Ø 3-3/8"

## Specifications

Every fixture includes a junction box with an integrated driver

Switch-selectable CCT

60° beam angle

30° tilting, 360° rotation

Cast aluminum construction

5-year warranty

## Finish

- **BK** Black
- **GD** Gold
- **WH** White

## Accessories

### RFP-23

Rough-in plate

### RFP-UNI

Universal rough-in plate

### GSP-CC-EXT8FT

8-foot extension cable

### GSP-CC-EXT20FT

20-foot extension cable

## Multi-voltage (V) ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

## Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# REVOLVE

Our Recessed family has grown with a new range of adjustable downlights. The effortless design and high functionality of these fixtures are sure to make a welcome addition in any room.

**GBR35-CC, GBR35-DW**



**GBR04-CC, GBR04-DW**



**GBR06-CC, GBR06-DW**




**GBR35SQ-CC**



GBR35-CC-DUO



GBR35-CC-TRIO

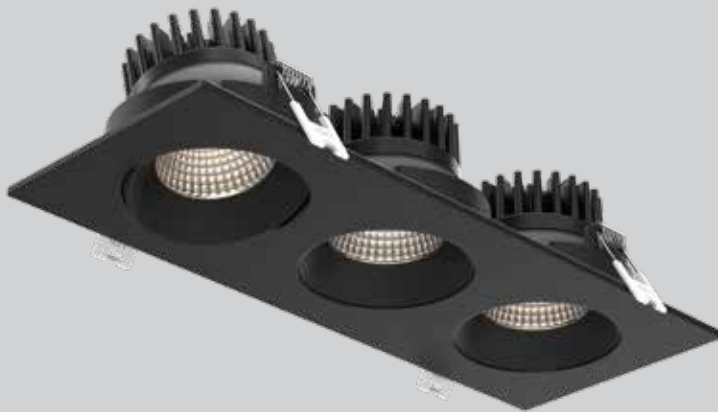

COLOR SELECT



WET



WARM DIMMING\*



LOW-GLARE



30°  
SWIVEL/DIRECTIONAL



AIR TIGHT

IC  
RATED

T24  
JA8  
CERTIFIED



Bluetooth<sup>†</sup>



CHANGE COLORS<sup>‡</sup>

DCP-GBR35



\*Models GBR35-DW , GBR04-DW, GBR06-DW only

\*\*Model GBR04-CC only

†Model DCP-GBR35 only

# REVOLVE

Our Recessed family has grown with a new range of adjustable downlights. The effortless design and high functionality of these fixtures are sure to make a welcome addition in any room.



| Model         | Size    | Watts | Delivered lumens | CRI | Color °T                       | Voltage options ⚡                                                |
|---------------|---------|-------|------------------|-----|--------------------------------|------------------------------------------------------------------|
| GBR35-CC      | 3.5"    | 12 W  | 990 lm           | 90  | 2700, 3000, 3500, 4000, 5000 K | 120 V<br>TRIAC dimming                                           |
| GBR04-CC      | 4"      | 15 W  | 1240 lm          |     |                                | or                                                               |
| GBR06-CC      | 6"      | 20 W  | 1935 lm          |     |                                |                                                                  |
| GBR35-DW†     | 3.5"    | 12 W  | 825 lm           |     | 3000 K - 2200 K                | V: 120 / 277 / 347V<br>0-10V dimming<br>(Check for availability) |
| GBR04-DW†     | 4"      | 15 W  | 1210 lm          |     |                                |                                                                  |
| GBR06-DW†     | 6"      | 20 W  | 1540 lm          |     |                                |                                                                  |
| GBR35SQ-CC    | 3.5"    | 12 W  | 1030 lm          |     | 2700, 3000, 3500, 4000, 5000 K |                                                                  |
| GBR35-CC-DUO  | 2x 3.5" | 24 W  | 2040 lm          |     |                                |                                                                  |
| GBR35-CC-TRIO | 3x 3.5" | 36 W  | 3170 lm          |     |                                |                                                                  |
| DCP-GBR35     | 3.5"    | 12 W  | 650 lm           | 90  | RGB + 2700 K - 6500 K          | 120 V                                                            |

\*Models GBR35-DW , GBR04-DW, GBR06-DW only


\*\*Energy Star certification applies to all models except GBR35-DW, GBR04-DW, GBR06-DW, and DCP-GBR35

†Not available in multi-voltage

‡Model DCP-GBR35 only


**GBR35-CC, GBR35-DW,  
DCP-GBR35**

Ø3-1/2"




**GBR04-CC, GBR04-DW**

Ø4-1/4"




**GBR06-CC, GBR06-DW**

Ø6-1/2"




**GBR35SQ-CC**

Ø3-1/2"




**GBR35-CC-DUO**

7-1/8" x 3-1/2"



**GBR35-CC-TRIO**

10-1/2" x 3-1/2"

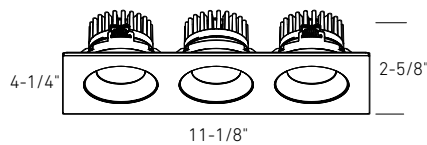

**Specifications**

Every fixture includes a junction box with an integrated driver  
Can be daisy chained  
30° tilting, 360° rotation  
Switch-selectable CCT (CC models only)  
Dim-to-warm technology, dims from 3000 K to 2200 K to mimic incandescent light (GBRXX-DW models only)  
40° beam angle  
30° tilting, 360° rotation  
Full color spectrum and 2700–6500K in pure whites (DCP-GBR35 only)  
Dimmable via the DALS Connect app and the DCP-RMCT remote (DCP-GBR35 only)  
5-year warranty

**Finish**

- **BK** Black
- **WH** White

**Accessories**

**RFP-35**

Rough-in plate for GBR35, GBR35SQ

**RFP-UNI**

Universal rough-in plate for GBR04, GBR06

**RFP-46**

Rough-in plate for GBR04, GBR06

**RFP-DUO**

Rough-in plate for GBR35-DUO

**RFP-TRIO**

Rough-in plate for GBR35-TRIO

**REC-CC-EXT8FT, REC-CC-EXT20FT**

8 ft and 20 ft extension cables for CC models

**REC-3K-EXT8FT, REC-3K-EXT20FT**

8 ft and 20 ft extension cables for DW models

**DCP-RMCT**

Smart remote for DCP-GBR35

**DCP-HUBV2**

DALS Connect Pro Hub for DCP-GBR35

**Multi-voltage (V) ⚡**

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALS representative for additional information and to confirm availability.

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALS representative for more information.

# PIVOT

When searching for lighting flexibility, look no further than our 3", 4" & 6" flat gimbal LED downlights. With powerful lumen output and the ability to direct light with a 360° rotation and a 90° tilt angle, this product will meet your every need.

**FGM4-3K, FGM4-CC**




**FGM2-CC**




**FGM3-CC**



**FGM6-CC**

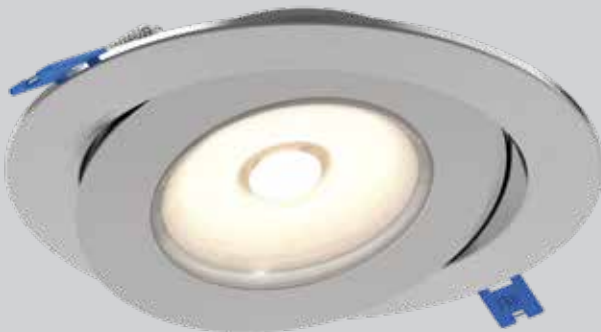

**FGM4SQ-CC**

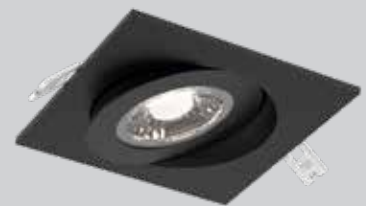



FGM4-CC-DUO



FGM4-CC-TRIO



DCP-FGM4



\*Not available for models FGM4-3K and DCP-FGM4

\*\*Not available for models DCP-FGM4

†Model DCP-FGM4 only

# PIVOT

When searching for lighting flexibility, look no further than our 4-inch square flat gimbal LED downlight. With a powerful lumen output and the ability to direct light through a 360° rotation and a 90° tilt angle, this product will meet all your lighting needs.



| Model        | Size  | Watts | Delivered lumens | CRI | Color °T                       | Voltage options ⚡                                                                                                                    |
|--------------|-------|-------|------------------|-----|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| FGM4-3K      | 4"    | 9 W   | 740 lm           | 90  | 3000 K                         | <b>120 V</b><br><b>TRIAC dimming</b><br><br>or<br><br><b>V: 120 / 277 / 347V</b><br><b>0-10V dimming</b><br>(Check for availability) |
| FGM2-CC      | 2"    | 7 W   | 615 lm           |     | 2700, 3000, 3500, 4000, 5000 K |                                                                                                                                      |
| FGM3-CC      | 3"    | 6 W   | 550 lm           |     |                                |                                                                                                                                      |
| FGM4-CC      | 4"    | 9 W   | 800 lm           |     |                                |                                                                                                                                      |
| FGM6-CC      | 6"    | 14 W  | 1155 lm          |     |                                |                                                                                                                                      |
| FGM4SQ-CC    | 4"    | 9 W   | 800 lm           |     |                                |                                                                                                                                      |
| FGM4-CC-DUO  | 2x 4" | 18 W  | 1780 lm          |     |                                |                                                                                                                                      |
| FGM4-CC-TRIO | 3x 4" | 27 W  | 2365 lm          |     |                                |                                                                                                                                      |
| DCP-FGM4     | 4"    | 9 W   | 532 lm           |     | RGB + 2700 K - 6500 K          | 120 V                                                                                                                                |

\*Not available for models FGM4-3K and DCP-FGM4

\*\*Not available for models DCP-FGM4

†Model DCP-FGM4 only

**FGM2-CC**

Ø2-3/4"

**FGM3-CC**

Ø3-3/8"

**FGM4-CC, DCP-FGM4**

Ø4-1/4"

**FGM6-CC**


Ø6-1/4"

**FGM4SQ**


Ø4-1/4"

**FGM4-CC-DUO**

8-5/8" X 4-3/4"

**FGM4-CC-TRIO**

13" X 4-5/8"

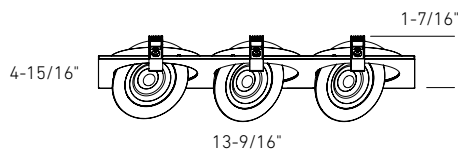**Specifications**

Every fixture includes a junction box with integrated dimmable driver  
 Can be daisy chained  
 90° tilting, 360° rotation  
 Aluminum construction  
 Switch-selectable CCT  
 40° beam spread  
 Full color spectrum and 2700–6500K in pure whites (DCP-FGM4 only)  
 Dimmable via the DALS Connect app and the DCP-RMCT remote (DCP-FGM4 only)  
 5-year warranty

**Finish**

- **BK** Black (except DCP-FGM4)
- **SN** Satin Nickel (FGM4, FGM6 only)
- **WH** White

**Accessories****RFP-UNI**

Universal rough-in plate

**RFP-23**

Rough-in plate for 3" model

**RFP-46**

Rough-in plate for 4" and 6" models

**RFP-DUO**

Rough-in plate for FGM4-CC-DUO

**RFP-TRIO**

Rough-in plate for FGM4-CC-TRIO

**REC-3K-EXT8FT, REC-3K-EXT20FT**

8 ft and 20 ft extension cables for 3K models

**REC-CC-EXT8FT, REC-CC-EXT20FT**

8 ft and 20 ft extension cables for CC models

**DCP-RMCT**

Smart remote for DCP-FGM4

**DCP-HUBV2**

DALS Connect Pro Hub for DCP-FGM4

**Multi-voltage (V) ⚡**

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALS representative for additional information and to confirm availability.

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALS representative for more information.

# SCOPE

There are moments when you want the ability to direct light as you please. With our LED Gimbal recessed fixture, this has now become a reality with the easiest of installations.




| Model        | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage options ⚡                                                |
|--------------|------|-------|------------------|-----|--------------------------------|------------------------------------------------------------------|
| GMB2-CC      | 2"   | 8 W   | 750 lm           | 90  | 2700, 3000, 3500, 4000, 5000 K | 120V TRIAC dimming                                               |
| LEDDOWNG3-CC | 3"   | 8 W   | 800 lm           |     |                                | or                                                               |
| GMB4-CC      | 4"   | 11 W  | 995 lm           |     |                                | V: 120 / 277 / 347V<br>0-10V dimming<br>(Check for availability) |

**GMB2-CC**

Ø2-1/4"



1-5/8"




Ø2-1/2"

**GMB4-CC**

Ø4-1/4"



1-5/8"




Ø4-7/8"

**LEDDOWNG3-CC**

Ø2-3/4"



2"



Ø3-1/4"

**Specifications**

Every fixture includes a junction box with integrated dimmable driver

Can be daisy chained (3" and 4" models only)

30° tilting, 360° rotation

Aluminum construction

Switch-selectable CCT

Low profile

40° beam spread

5-year warranty

**Finish**

- **BK** Black
- **SN** Satin Nickel (GMB4-CC only)
- **WH** White

**Accessories****RFP-UNI**

Universal rough-in plate for 3" and 4" models

**RFP-GMB2**

Rough-in plate for GMB2-CC

**RFP-23**

Rough-in plate for LEDDOWNG3-CC

**RFP-46**

Rough-in plate for GMB4-CC

**REC-CC-EXT8FT**

8-foot extension cable

**REC-CC-EXT20FT**

20-foot extension cable

**Multi-voltage (V) ⚡**

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# EXCEL

LED panel lights are more accessible than ever before. The sleek and minimal construction allows for the easiest of installations.



COLOR SELECT



WET



WARM DIMMING<sup>1</sup>



FIRE RATED<sup>2</sup>



AIR TIGHT

IC

RATED

T24  
JA8

CERTIFIED



Bluetooth<sup>+</sup>



CHANGE COLORS<sup>†</sup>



| Model       | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage options ⚡                                                |
|-------------|------|-------|------------------|-----|--------------------------------|------------------------------------------------------------------|
| 5003-CC     | 3"   | 8 W   | 600 lm           | 90  | 2700, 3000, 3500, 4000, 5000 K | 120 V<br>TRIAC dimming                                           |
| 5004-CC     | 4"   | 11 W  | 800 lm           |     |                                |                                                                  |
| 5005-CC     | 5"   | 12 W  | 900 lm           |     |                                | or                                                               |
| 5006-CC     | 6"   | 14 W  | 1100 lm          |     |                                | V: 120 / 277 / 347V<br>0-10V dimming<br>(Check for availability) |
| 5004SQ-CC   | 4"   | 11 W  | 800 lm           |     |                                |                                                                  |
| 5004-FR-CC* | 4"   | 11 W  | 960 lm           | 80  |                                |                                                                  |
| 5006-FR-CC* | 6"   | 14 W  | 1440 lm          | 80  |                                |                                                                  |
| 5004-DW**   | 4"   | 11 W  | 850 lm           | 80  | 3000 K - 2200 K                | 120V                                                             |
| DCP-PNL4    | 4"   | 14 W  | 750 lm           | 90  | RGB + 2700 K - 6500 K          | 120 V                                                            |
| DCP-PNL6    | 6"   | 20 W  | 1200 lm          |     |                                |                                                                  |

<sup>1</sup>Model 5004-DW only

<sup>2</sup>Models 5004-FR-CC, 5006-FR-CC only


\*2-hour fire-rated without additional housing or hardware, in accordance with UL 263, ASTM E119, and CAN ULC S101

\*\*Dim-to-warm technology dims from 3000 K to 2200 K, Not available in multi-voltage

<sup>†</sup>Models DCP-PNL4, DCP-PNL6 only

**5003-CC**


Ø3-3/8"



Ø3-3/4"

**5004-CC, DCP-PNL4**


Ø4-1/4"



Ø4-3/4"

**5005-CC**

Ø5-3/8"



Ø5-3/4"

**5006-CC, DCP-PNL6**


Ø6-1/2"



Ø6-11/16"

**5004SQ-CC**


Ø4-1/4"



4-3/4" x 4-3/4"

**5004-DW**

Ø4-1/4"



Ø4-3/4"

**5004-FR**

Ø4-1/4"



Ø5-1/8"

**5006-FR**

Ø6-1/2"



Ø7-3/16"

**Specifications**

Every fixture includes a junction box with an integrated driver  
 Can be daisy chained  
 Smooth 360° wide spread  
 Frosted lens  
 Edge lit technology  
 Aluminum construction  
 Switch-selectable CCT  
 Very low profile  
 Full color spectrum and 2700–6500K in pure whites (DCP-PNL4, DCP-PNL6 only)  
 Dimmable via the DALI Connect app and the DCP-RMCT remote (DCP-PNL4, DCP-PNL6 only)  
 5-year warranty

**Finish**

- **BK** Black (3" and 6" models only)
- **SN** Satin Nickel (5004-CC only)
- **WH** White

**Multi-voltage (V)**

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

**Accessories**

**REC-TRIM4/6-BK/GD/SN** (5004, 5006)  
 4" and 6" recessed panel trim in black, gold, or satin nickel

**REC-PT4-GD/SN** (5004-DW)  
 4" recessed panel trim in gold or satin nickel

**DCP-PNL4-TRIM, DCP-PNL6-TRIM-BK**  
 4" and 6" black recessed panel trims for DCP-PNL4, DCP-PNL6

**5000-EXT8FT, 5000-EXT20FT**  
 8 ft and 20 ft extension cables

**RFP-23** (5003)  
 Rough-in plate

**RFP-46** (5004, 5006, DCP-PNL4, DCP-PNL6)  
 Rough-in plate

**RFP-58** (5005)  
 Rough-in plate

**RFP-UNI** (5003, 5004, 5006, DCP-PNL4, DCP-PNL6) Universal rough-in plate

**DCP-RMCT**  
 Smart remote for DCP-PNL4, DCP-PNL6

**DCP-HUBV2**  
 DALI Connect Pro Hub for DCP-PNL4, DCP-PNL6

NEW

# REACH

LED panel lights are more accessible than ever before. The sleek and minimal construction allows for the easiest of installations.



COLOR SELECT



WET



AIR TIGHT

IC

RATED

T24  
JA8

CERTIFIED



COASTAL RATED\*



Intertek



|              | Model              | Size | Watts | Delivered lumens | CRI | Color °T                          | Voltage |
|--------------|--------------------|------|-------|------------------|-----|-----------------------------------|---------|
| †Per fixture | <b>PNL4-CC</b>     | 4"   | 9 W   | 740 lm           | 90  | 2700, 3000, 3500,<br>4000, 5000 K | 120 V   |
|              | <b>PNL4-CC-K12</b> | 4"   | 9 W   | 740 lm†          |     |                                   |         |
|              | <b>PNL6-CC</b>     | 6"   | 12 W  | 990 lm           |     |                                   |         |
|              | <b>PNL6-CC-K12</b> | 6"   | 12 W  | 990 lm†          |     |                                   |         |

\*Designed to withstand salty air. 480h salt spray test approved.  
Equivalent to 6.5 years in coastal environment. (CC models only)



---

**PNL4-CC**


Ø4-1/4"



---

**PNL6-CC**

Ø6-1/4"



---

**Specifications**

Every fixture includes a junction box with an integrated driver  
Can be daisy chained  
Superior LED performance and lifespan  
Frosted lens  
Edge lit technology  
Aluminum construction  
Designed to withstand salty air  
Very low profile  
Kits available  
5-year warranty

---

**Finish**

○ **WH** White

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

---

**Accessories****RFP-46**

Rough-in plate for PNL4, PNL6

**RFP-UNI**

Universal rough-in plate for PNL4, PNL6

**PNL4-TRIM-BK, PNL6-TRIM-BK**

4" and 6" black recessed panel trims for PNL4-CC, PNL6-CC

**REC-CC-EXT8FT, REC-CC-EXT20FT**

8 ft and 20 ft extension cables for PNL4-CC, PNL6-CC

**PNL-EXT8FT, PNL-EXT20FT**

8 ft and 20 ft extension cables for PNL4-CC, PNL6-CC

# ALTER


This aluminum retrofit LED panel offers the easiest and most practical solution for upgrading your outdated recessed lighting. For style and convenience, the removable outer trim attaches with magnetic fasteners, creating a seamless look. It can be easily retrofitted into existing 4" canisters or standard octagonal junction boxes.




| Model    | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|----------|------|-------|------------------|-----|--------------------------------|---------|
| RTJB4-3K | 4"   | 9 W   | 550 lm           | 90  | 3000 K                         | 120 V   |
| RTJB3-CC | 3"   | 8 W   | 620 lm           |     | 2700, 3000, 3500, 4000, 5000 K |         |
| RTJB4-CC | 4"   | 9 W   | 565 lm           |     |                                |         |

\*Not available for model RTJB4-3K


#### RTJB3-CC



#### RTJB4-XX + RTJB4-ACC

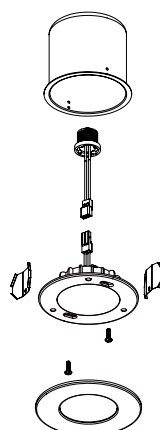

#### RTJB4-XX



#### Specifications

Fits on U.S. and Canadian octagonal junction boxes (RTJB3 only)  
Integrated dimmable driver  
Fire rated alternative when mounted onto a fire rated junction box  
Minimal heat emission  
Aluminum construction  
Switch-selectable CCT (models RTJB3-CC, RTJB4-CC only)  
Magnetic trim finish  
5-year warranty

#### Finish

○ **WH** White

#### Accessories

##### **RTJB4-ACC**

4" recessed can mounting kit for RTJB4-XX - clips and E26 socket

##### **RTJB4-TRIM-BK**

4" recessed panel trim in black

#### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

NEW

# EMERGENCY BATTERY BACKUP

The emergency battery backup ensures uninterrupted lighting during power outages, delivering 8W or 15W of output for up to 90 minutes. This supports egress lighting, which is required to safely illuminate exit paths such as hallways and stairwells during emergencies.



BACKUP POWER



UNIVERSAL



DAMP



CERTIFIED




CERTIFIED


REC-EMD15



REC-EMD08

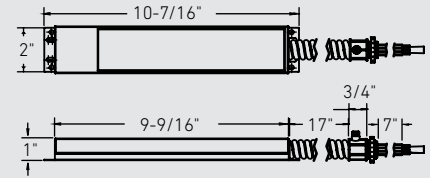

REC-EMD15

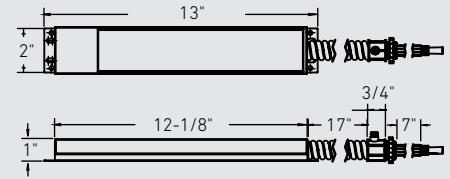

| Model     | Input voltage           | Input current | Output voltage | Output Power |
|-----------|-------------------------|---------------|----------------|--------------|
| REC-EMD08 | 100-347 VAC,<br>50/60Hz | 100mA max     | 170 VDC        | 8 W          |
| REC-EMD15 | 100-347 VAC,<br>50/60Hz | 100mA max     | 170 VDC        | 15 W         |

## Specifications

Test switch with cover included  
 Built-in lithium-ion battery  
 Universal voltage driver supports  
 120V, 277V, or 347V input with both TRIAC  
 and 0-10V dimming  
 Self-testing: monthly/yearly  
 Battery backup duration: 90 minutes  
 Recharge time: 24 hours  
 Meets NEC, IBC, and NFPA 101 Life Safety Code  
 emergency lighting requirements  
 CEC (CA Title 20) and U.S. DOE energy  
 efficiency compliant  
 5-year warranty

## Finish









● **RD** Red








## Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.











# ACCESSORIES

| Model           | Description                                                                                                                                |                                             | Specifications                                                                                                                                                                                                                              |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>RFP-UNI</b>  | Universal drilling plate<br>                              | $\varnothing 2 \frac{3}{4}"$<br>$\varnothing 3 \frac{3}{8}"$<br>$\varnothing 4 \frac{1}{4}"$<br>$\varnothing 6 \frac{1}{2}"$ | Expandable with on-center spacing up to 24"<br>Plates serve as template for cutting precise product openings (Please refer to product cut size)<br>Adds extra support and allows for easy and quick installation<br>Galvanized steel finish |
| <b>RFP-01</b>   | Drilling plate for RGR1-CC recessed fixture<br>           | $\varnothing 1\text{-}3\frac{1}{4}"$                                                                                         | Plates serve as template for cutting precise product openings (Please refer to product cut size)<br>Adds extra support and allows for easy and quick installation<br>Galvanized steel finish                                                |
| <b>RFP-GMB2</b> | Drilling plate for GMB2-CC recessed fixture<br>           | $\varnothing 2\text{-}1\frac{1}{4}"$                                                                                         | Plates serve as template for cutting precise product openings (Please refer to product cut size)<br>Adds extra support and allows for easy and quick installation<br>Galvanized steel finish                                                |
| <b>RFP-23</b>   | Drilling plate for 2 and 3" fixtures<br>                | $\varnothing 2\text{-}3\frac{1}{4}"$<br>$\varnothing 3\text{-}3\frac{3}{8}"$                                                 | Plates serve as template for cutting precise product openings (Please refer to product cut size)<br>Adds extra support and allows for easy and quick installation<br>Galvanized steel finish                                                |
| <b>RFP-35</b>   | Drilling plate for 3.5" fixtures<br>                    | $\varnothing 3\text{-}1\frac{1}{2}"$                                                                                         | Plates serve as template for cutting precise product openings (Please refer to product cut size)<br>Adds extra support and allows for easy and quick installation<br>Galvanized steel finish                                                |
| <b>RFP-46</b>   | Drilling plate for 4 and 6" fixtures<br>                | $\varnothing 4\text{-}1\frac{1}{4}"$<br>$\varnothing 6\text{-}1\frac{1}{2}"$                                                 | Plates serve as template for cutting precise product openings (Please refer to product cut size)<br>Adds extra support and allows for easy and quick installation<br>Galvanized steel finish                                                |
| <b>RFP-58</b>   | Drilling plate for 5 and 8" fixtures<br>                | $\varnothing 5\text{-}3\frac{3}{8}"$<br>$\varnothing 7\text{-}1\frac{1}{2}"$                                                 | Plates serve as template for cutting precise product openings (Please refer to product cut size)<br>Adds extra support and allows for easy and quick installation<br>Galvanized steel finish                                                |
| <b>RFP-RC06</b> | Drilling plate for 6" customizable recessed fixture<br> | $\varnothing 6"$                                                                                                             | Plates serve as template for cutting precise product openings (Please refer to product cut size)<br>Adds extra support and allows for easy and quick installation<br>Galvanized steel finish                                                |


| Model             | Description                                                                                                                       |                      | Specifications                                                                                                                                                                                          |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>RFP-MSL1</b>   | Drilling plate for MSL1 recessed fixture<br>     | 1-9/16" X<br>1-9/16" | Plates serve as template for cutting precise product openings<br>(Please refer to product cut size)<br><br>Adds extra support and allows for easy and quick installation<br><br>Galvanized steel finish |
| <b>RFP-MSL2</b>   | Drilling plate for MSL2 recessed fixture<br>     | 1-9/16" X<br>2-5/8"  | Plates serve as template for cutting precise product openings<br>(Please refer to product cut size)<br><br>Adds extra support and allows for easy and quick installation<br><br>Galvanized steel finish |
| <b>RFP-MSL4</b>   | Drilling plate for MSL4 recessed fixture<br>     | 2-3/4" X<br>2-3/4"   | Plates serve as template for cutting precise product openings<br>(Please refer to product cut size)<br><br>Adds extra support and allows for easy and quick installation<br><br>Galvanized steel finish |
| <b>RFP-MSL5</b>   | Drilling plate for MSL5 recessed fixture<br>   | 5-1/2" X<br>1-5/8"   | Plates serve as template for cutting precise product openings<br>(Please refer to product cut size)<br><br>Adds extra support and allows for easy and quick installation<br><br>Galvanized steel finish |
| <b>RFP-MSL5G</b>  | Drilling plate for MSL5G recessed fixture<br>  | 6-3/8" X<br>2-3/4"   | Plates serve as template for cutting precise product openings<br>(Please refer to product cut size)<br><br>Adds extra support and allows for easy and quick installation<br><br>Galvanized steel finish |
| <b>RFP-MSL10</b>  | Drilling plate for MSL10 recessed fixture<br>  | 10-3/4" X<br>1-5/8"  | Plates serve as template for cutting precise product openings<br>(Please refer to product cut size)<br><br>Adds extra support and allows for easy and quick installation<br><br>Galvanized steel finish |
| <b>RFP-MSL10G</b> | Drilling plate for MSL10G recessed fixture<br> | 11-1/2" X<br>2-3/4"  | Plates serve as template for cutting precise product openings<br>(Please refer to product cut size)<br><br>Adds extra support and allows for easy and quick installation<br><br>Galvanized steel finish |

# ACCESSORIES

| Model            | Description                                                                                                                                                |  | Specifications                                                                                                                                                                               |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>RFP-LNR24</b> | Drilling plate for LNR24-CC, LNR24-CC-V, DCP-LNR24<br>                    | 2-1/8" X<br>23-3/8"                                                               | Plates serve as template for cutting precise product openings (Please refer to product cut size)<br>Adds extra support and allows for easy and quick installation<br>Galvanized steel finish |
| <b>RFP-LNR48</b> | Drilling plate for LNR48-CC, LNR48-CC-V, DCP-LNR48<br>                    | 2-1/8" X<br>47-3/8"                                                               | Plates serve as template for cutting precise product openings (Please refer to product cut size)<br>Adds extra support and allows for easy and quick installation<br>Galvanized steel finish |
| <b>RFP-DUO</b>   | Drilling plate for FGM4-CC-DUO and GBR35-CC-DUO recessed fixtures<br>     | 7-1/8" X<br>3-1/2"<br>8-5/8" X<br>4-3/4"                                          | Plates serve as template for cutting precise product openings (Please refer to product cut size)<br>Adds extra support and allows for easy and quick installation<br>Galvanized steel finish |
| <b>RFP-TRIO</b>  | Drilling plate for FGM4-CC-TRIO and GBR35-CC-TRIO recessed fixtures<br> | 10-3/8" X<br>3-5/8"<br>13" X<br>4-5/8"                                            | Plates serve as template for cutting precise product openings (Please refer to product cut size)<br>Adds extra support and allows for easy and quick installation<br>Galvanized steel finish |

| Model                   |                                                                                     | Finish         | Specification                                                                                                                        |
|-------------------------|-------------------------------------------------------------------------------------|----------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <b>REC-GOOF2</b>        |  | White          | Goof ring for 2" recessed lights (not compatible with RGM2)<br>Allows 2" fixtures to fit in a hole with a maximum diameter of 3-3/4" |
| <b>LEDDOWNACC-GOOF3</b> |  | White          | Goof ring for 3" recessed lights<br>Allows 3" fixtures to fit in a hole with a maximum diameter of 4-3/4"                            |
| <b>LEDDOWNACC-GOOF4</b> |  | White<br>Black | Goof ring for 4" recessed lights<br>Allows 4" fixtures to fit in a hole with a maximum diameter of 6"                                |
| <b>LEDDOWNACC-GOOF6</b> |  | White          | Goof ring for 6" recessed lights<br>Allows 6" fixtures to fit in a hole with a maximum diameter of 8"                                |




| Model                                                                  |                                                                                     | Finish                        | Specification                                                                                                                                                                                                                |
|------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>REC-PT4-GD &amp; SN</b>                                             |    | Gold<br>Satin Nickel          | 4" recessed panel trim<br>Compatible products:<br>5004-DW                                                                                                                                                                    |
| <b>REC-TRIM4 / REC-TRIM6 – BK, GD &amp; SN</b>                         |    | Black<br>Gold<br>Satin Nickel | 4" and 6" panel trims<br>Compatible products:<br>5004-CC, 5006-CC                                                                                                                                                            |
| <b>PNL4 / PNL6-TRIM – BK</b>                                           |    | Black                         | 4" and 6" panel trims<br>Compatible products:<br>5004-CC, 5006-CC                                                                                                                                                            |
| <b>RTJB4-TRIM-BK</b>                                                   |    | Black                         | 4" recessed panel trim<br>Compatible products:<br>RTJB4-3K, RTJB4-CC                                                                                                                                                         |
| <b>RTJB4-ACC</b>                                                       |   | -                             | 4" recessed can mounting kit for<br>RTJB4-XX - clips and E26 socket                                                                                                                                                          |
| <b>DDP4 / DDP6-TRIM-BK</b>                                             |  | Black                         | 4" and 6" regressed panel trims<br>Compatible products:<br>DDP4-CC, DCP-DDP4, DDP6-CC, DCP-DDP6                                                                                                                              |
| <b>DRR4 / DRR6-TRIM-BK &amp; SBA</b>                                   |  | Black<br>Sandblasted aluminum | 4" and 6" regressed panel trims<br>Compatible products:<br>DRR4-CC, DRR6-CC                                                                                                                                                  |
| <b>5000-EXT / GSP-CC-EXT / REC-CC-EXT / PNL-EXT – 8 FT &amp; 20 FT</b> |  | White                         | 8-foot extension cord for 3-pin recessed fixtures<br>20-foot extension cord for 3-pin recessed fixtures<br><br>Male/female connector for quick-connect installation.<br>Connect together for a total length of up to 40 feet |
| <b>REC-CDW-EXT – 8 FT &amp; 20 FT</b>                                  |  | White                         | 8-foot extension cord for 4-pin recessed fixtures<br>20-foot extension cord for 4-pin recessed fixtures<br><br>Male/female connector for quick-connect installation.<br>Connect together for a total length of up to 40 feet |





ACCENT

24 V



80

**INSTALLATION  
GUIDE**



82

**PUSH-PUCK**  
4024R-CC  
4024S-CC




84

**COB-TAPE**  
COBTP24V-K10 / 20FT  
COBTP24V-R50 / 100FT



282

**GLOW**  
DCP-TAP10 / 20 / 50FT



86

**24V DRIVERS**  
DR2412 / 24 / 48 /  
60 / 96DIM



87

**24V COMPACT DRIVERS**  
PLD2412 / 24 / 48DIM



88

**WAVE TUNE**  
USW3



89

**SLIDE 24V**  
DD2448



105

**24V ACCESSORIES**

12 V



90

**SUPER-PUCK**  
4001-CC



91

**DUO-PUCK**  
4005-CC  
K4005-CC



92

**MINI-PUCK**  
LEDRDM1



93

**ECO-PUCK**  
LEDROP18



94

**COB-TAPE**  
COBTP3M / 5M  
COBTP-REEL



96

**SLIDE 12V**  
DD1260



97

**12V DRIVERS**  
BT06 / 12 / 24DIM-IC  
BT36 / 48DIM



102

**12V ACCESSORIES**

120 V



98

**POWERLED PUCK**  
6001-CC



99

**POWERLED LINEAR**  
6009CC / 6012CC /  
6024CC / 6036CC /  
6048CC



100

**COUNTERLED LINEAR**  
9009CC / 9012CC /  
9018CC / 9024CC /  
9030CC



106

**120V ACCESSORIES**



# Proper Sizing, Spacing and Lighting Techniques


As its name suggests, under cabinet lighting refers to lights that are installed under a cabinet, resulting in illumination of the area immediately below a section of cabinets. It is most commonly used in kitchen areas, where additional lighting is useful for food preparation.

## Types of under cabinet lighting




### Puck lights

Pucks are the most versatile products as they can be installed in any application. Most of our pucks can be either surface-mounted or recessed into cabinetry, ensuring a flush surface appearance. Our pucks are designed to provide smooth and uniform light output.



### Linears

Linears are ideal for efficient and uniform solutions. All our linears are designed for surface mounting, and many of them can pivot to focus on features such as the backsplash. Most linears come in various sizes, allowing them to be combined to cover the length of most surfaces.



### Tape lights


Tape lights are flexible rolls of LEDs with adhesive backs, suitable for virtually any application, extending beyond under-cabinet lighting. Tape lights have a super low profile and are easy to install.

### How many do I need?

If you are installing pucks, we recommend spacing them approximately 24 inches apart. For linears, you can either seamlessly install them from end to end or leave a gap equivalent to the size of the product.




## Power source




### Low-voltage (12 V)

A 12V system includes a driver and fixtures, with one driver powering multiple products. It allows for compact fixture designs and uses thin, flexible wiring for easier installation.



### Low-voltage (24 V)

A 24V system also uses a driver and fixtures, supporting longer wiring runs than 12V. It enables sleek designs and employs thin, flexible wiring for streamlined installations.



### Direct wire (120 V)

120V direct means that no other components are required to power the product. Either the LEDs are 120V direct or a driver is integrated in each product. The advantage of a 120V product is the ease of installation.

### Dimmer/driver switch (12V)

Replace your 12V driver with an integrated driver/dimmer to control the brightness of your low-voltage lights. Simply connect this unit to your 120V input current to regulate your low-voltage lighting.

### Choosing the right driver

We offer a wide range of plug-in (A), direct wire (B), and dimmer/driver switches (C). To select the correct driver, simply add up the wattage from all your lights and choose a driver with a higher wattage that suits your specific needs.

## Connections

### Direct wire

Direct wire systems are typically installed by electrical contractors. This means the power feed is connected directly inside the product or driver, without any plugs, and with no exposed wires. Direct wire installations must be enclosed in a connection box with sufficient volume to ensure a safe connection. All our direct wire products feature built-in connection boxes with convenient knockouts to discreetly route the wiring.

### Plug-in

Plug-in options are really easy to install as they plug directly into an electrical outlet.

### Dimmer/driver switch

Dimmer/driver switch systems, two-in-one integrated units often installed by qualified electricians, seamlessly replace your standard wall switch and transformer simultaneously. This involves connecting the power feed directly inside the switch, eliminating the need for plugs and exposed wires.

**GOOD  
TO KNOW!**

For optimal dimming try to use up at least 50% of the driver's capacity. For example, if all products come up to 10 watts, you would be much better off with a 12W driver than a 24W driver.

# PUSH-PUCK

The Push-Puck, a versatile 24V LED puck, features Touch Tune technology, push-to-change CCT for effortless color temperature adjustment, and delivers precise, high-quality illumination for recessed or surface-mounted applications.



COLOR SELECT



DRY



TOUCH TUNE


24V  
VOLTAGE

| Model    | Size    | Watts | Delivered lumens | CRI | Color °T                               | Voltage |
|----------|---------|-------|------------------|-----|----------------------------------------|---------|
| 4024R-CC | Ø2-1/2" | 4 W   | 210 lm           | 90  | 2700 K/ 3000 K/ 3500 K/ 4000 K/ 5000 K | 24 V    |
| 4024S-CC | Ø2-1/2" | 4 W   | 210 lm           |     |                                        |         |




#### 4024R-CC

Ø2.375"



#### 4024S-CC

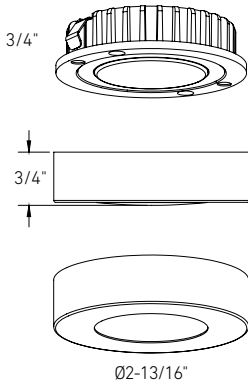

#### Specifications

Requires 24 VDC LED power supply and wiring (sold separately)  
Recessed or surface mount installation  
Push-selectable CCT  
Single-wire quick-connect system for clean, error-free installation  
Smooth 360° wide spread  
5-year warranty

#### Power supplies: plug-in

**COBTP24V-ETR30**  
24 VDC/30W class 2 LED driver  
**COBTP24V-ETR60**  
24 VDC/60W class 2 LED driver

#### Power supplies: hard-wired

**DD2448**  
2-in-1 24V driver and dimmer  
**DR2412DIM, DR2424DIM, DR2448DIM**  
**DR2460DIM DR2496DIM**  
24V dimmable hardwired drivers  
(12W, 24W, 48W, 60W, 96W)

#### Power supplies: compact hard-wired

**PLD2412DIM, PLD2424DIM, PLD2448DIM**  
24V compact dimmable hardwired drivers  
(12W, 24W, 48W)

#### Accessories

**UCBL-20-18, UCBL-50-18, UCBL-100-18**  
18-gauge connection wire (20 ft, 50 ft, 100 ft)

#### Finish


- **BK** Black
- **GD** Gold
- **SN** Satin Nickel
- **WH** White

#### Note

Plug-in or hard-wired power supply required for installation. Sold separately.  
Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# 24V COB TAPE

Our 24V COB tape light with 5CCT adjustability delivers a smooth, dot-free glow, five versatile color temperature options, and minimized voltage drop for consistent performance in any space or ambiance.

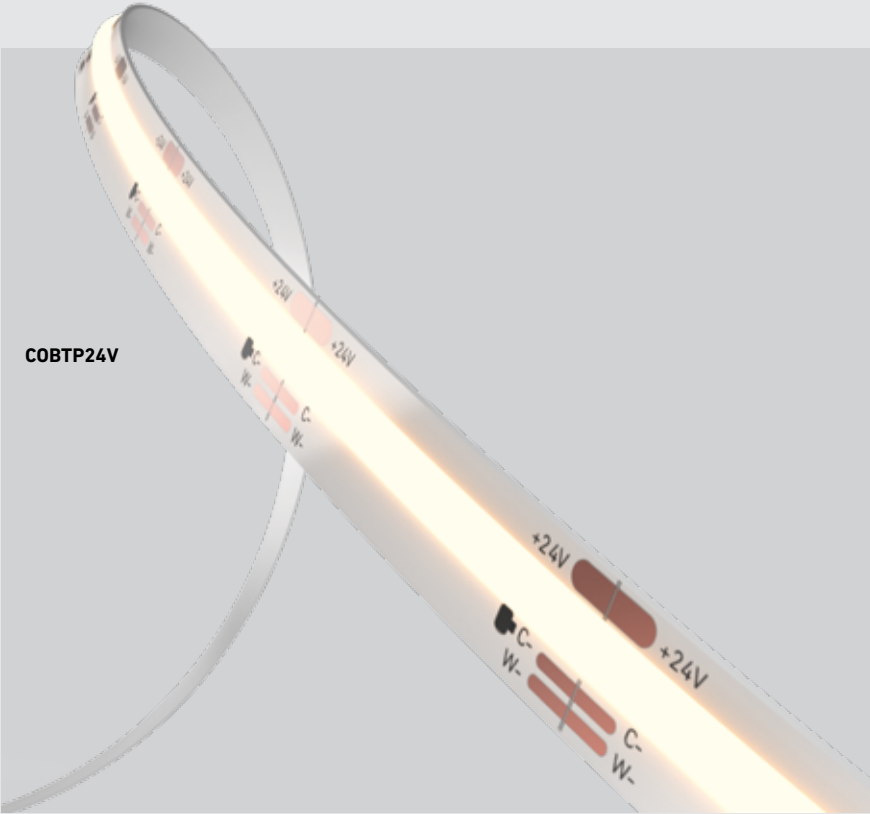

COLOR SELECT



DRY




VOLTAGE



| Model               | Size       | Watts       | Delivered lumens | CRI | Color °T                               | Voltage |
|---------------------|------------|-------------|------------------|-----|----------------------------------------|---------|
| COBTP24V-K10FT-CC   | 10' (3m)   | 18 W        | 1590 lm          | 90  | 2700 K/ 3000 K/ 3500 K/ 4000 K/ 5000 K | 24 V    |
| COBTP24V-K20FT-CC   | 20' (6m)   | 36 W        | 3180 lm          |     |                                        |         |
| COBTP24V-R50FT-CC*  | 50' (15m)  | 1.8 W /foot | 160 lm /foot     |     |                                        |         |
| COBTP24V-R100FT-CC* | 100' (30m) | 1.8 W /foot | 160 lm /foot     |     |                                        |         |

\*50ft and 100ft 24V COB reels do not include a driver.  
Plug-in or hard-wired power supply required for installation. Sold separately.

|                                |                  |
|--------------------------------|------------------|
| <b>COBTP24V-K10FT-CC</b>       | 1 x 10' (3m) kit |
| <b>COBTP24V-K20FT-CC</b>       | 1 x 20' (6m) kit |
| <b>COBTP24V-R50FT-CC</b>       | 1 x 50' (15m)    |
| Reel only, driver not included |                  |
| <b>COBTP24V-R100FT-CC</b>      | 1 x 100' (30m)   |
| Reel only, driver not included |                  |

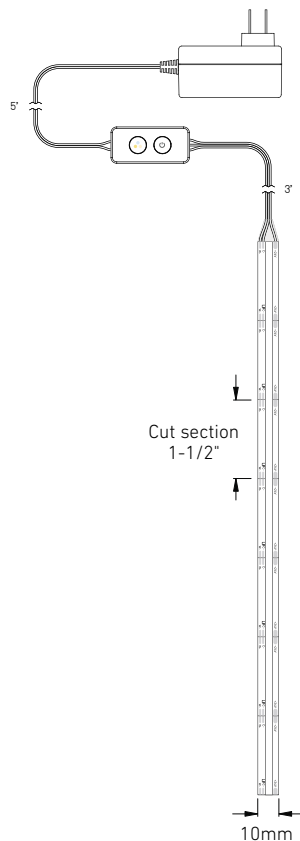

## Specifications

24 VDC LED plug-in driver included for 10- and 20-foot kits only (10 feet = 30W / 20 feet = 60W)

Seamless light emission (190 LEDs/foot)

Includes a wired remote with selectable CCT and on/off functionality for 10- and 20-foot kits only

Quick-connect assembly for easy installation

Self adhesive

Can be cut at every cut mark (every 1-1/2")

Maximum run of 40 feet

5-year warranty

## Power supplies: plug-in

**COBTP24V-ETR30**  
24 VDC/30W class 2 LED driver

**COBTP24V-ETR60**  
24 VDC/60W class 2 LED driver

## Power supplies: hard-wired

**DD2448**  
2-in-1 24V driver and dimmer

**DR2412DIM, DR2424DIM, DR2448DIM**  
**DR2460DIM DR2496DIM**  
24V dimmable hardwired drivers (12W, 24W, 48W, 60W, 96W)

## Power supplies: compact hard-wired

**PLD2412DIM, PLD2424DIM, PLD2448DIM**  
24V compact dimmable hardwired drivers (12W, 24W, 48W)

## Accessories

**COBTP24V-ACCI**  
I-shaped connector (strip-to-strip)

**COBTP24V-ACCL**  
L-shaped connector (strip-to-strip)

**COBTP24V-EXT**  
Extension cables available in 4" (EXT04), 24" (EXT24), 60" (EXT60), and 120" (EXT120) lengths

**COBTP24V-CC36**  
36" extension cable (strip-to-controller)

**COBTP24V-SWT**  
CCT controller with on/off functionality

**ALXT-RECXFT / ALXT-SURXFT**  
3' and 6' aluminum extrusions, recessed or surface-mounted, in black or white finishes

**ALXT-REC-20FTLENS / ALXT-SUR-20FTLENS**  
20' frosted lenses for recessed and surface extrusions, black or white finishes

# 24V LED DIMMABLE DRIVERS


Enjoy smooth, precise dimming with our 24V LED Dimmable Drivers. Engineered for consistent performance, they let you easily adjust light output to match the time of day and the needs of your 24V fixtures.




DR2496DIM



DR2412DIM / DR2424DIM / DR2448DIM




DR2460DIM



| Model     | Watts | Input voltage            | Output voltage | Dimming type           |
|-----------|-------|--------------------------|----------------|------------------------|
| DR2412DIM | 12 W  | 100 VAC-230 VAC, 50/60Hz | 24 VDC         | TRIAC / ELV compatible |
| DR2424DIM | 24 W  |                          |                |                        |
| DR2448DIM | 48 W  |                          |                |                        |
| DR2460DIM | 60 W  |                          |                |                        |
| DR2496DIM | 96 W  |                          |                |                        |

DR2496DIM



## Specifications

Constant voltage mode power supply  
AC-dimming supply  
(with TRIAC or ELV dimmer)  
Protection: short circuit / Over voltage  
Integrated junction box for hard-wire installation  
Fully isolated metal case -  
Cooling by air convection  
Optimal dimming when used at 50% or more of total load  
Load Range: 50% to 100%  
5-year warranty

## Finish

● **BK** Black

## Note


Other wattage or voltage configurations are available upon request. Custom models may require minimum order quantities (MOQs) and extended lead times. Contact your DALI representative for details.

## 24V COMPACT LED DIMMABLE DRIVERS


Enjoy smooth, precise dimming with our Compact 24V Drivers. 33% lighter and smaller than our DRXXX models, they provide consistent performance and effortless adjustment of light output to match the time of day and the specific needs of your 24V low-voltage fixtures.




PLD2412DIM

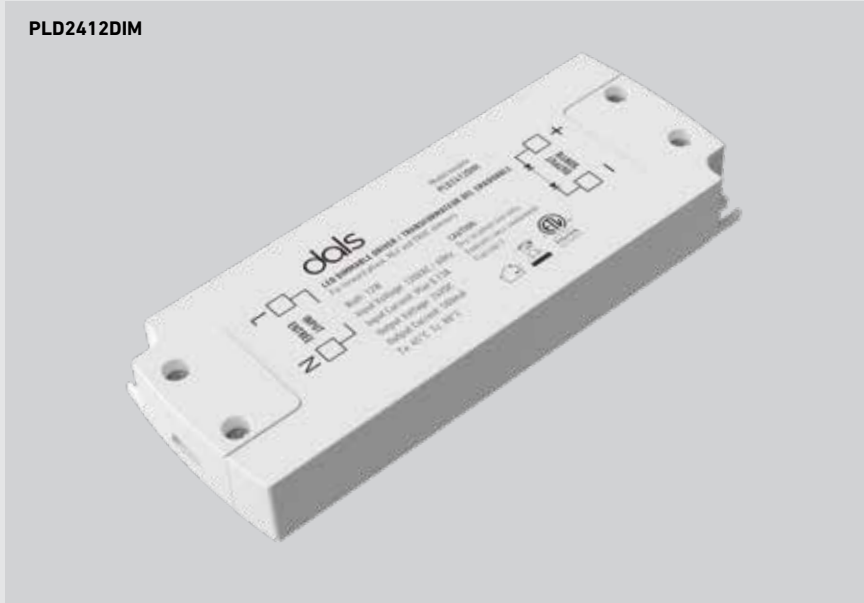

PLD2412DIM

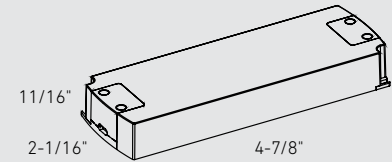


PLD2424DIM

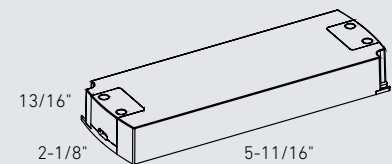

| Model      | Watts | Input voltage | Output voltage | Dimming type   |
|------------|-------|---------------|----------------|----------------|
| PLD2412DIM | 12 W  | 120 V         | 24 VDC         | TRIAC / ELV /  |
| PLD2424DIM | 24 W  | 60Hz          |                | MLV compatible |
| PLD2448DIM | 48 W  |               |                |                |

PLD2448DIM

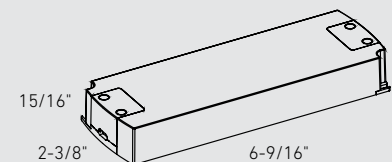

### Specifications

Constant voltage mode power supply  
AC-dimming supply  
(with TRIAC, ELV or MLV dimmers)  
Protection: short circuit / Over voltage  
Integrated junction box for  
hard-wire installation  
Fully isolated plastic case -  
Cooling by air convection  
Minimum load: 12/24W – 3W, 48W – 5W  
Load range: 50% to 100%  
Class 2 driver, low-voltage and  
safety-compliant  
5-year warranty

### Finish

☐ WH White

### Note

Other wattage or voltage configurations are available upon request. Custom models may require minimum order quantities (MOQs) and extended lead times. Contact your DALs representative for details.

# WAVE TUNE

Experience intuitive control with our 12V/24V Wave Sensor. A simple hand motion turns your lights on or off, while holding your hand adjusts brightness from 10% to 100%. Designed for precision and convenience, it works through materials up to 1.5 inches thick and is intended for surface mounting only.




DRY

12V  
VOLTAGE24V  
VOLTAGE

WAVE TUNE



UWS3

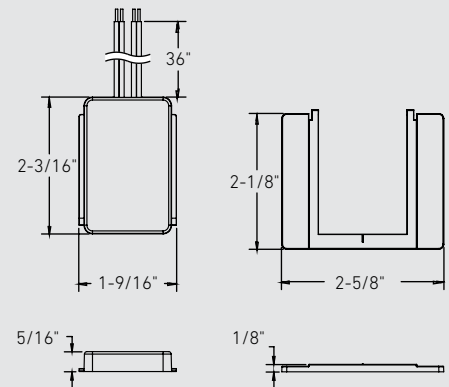

| Model | Size   | Minimum load | Maximum load | Input voltage | Output voltage |
|-------|--------|--------------|--------------|---------------|----------------|
| UWS3  | 2-1/4" | 5 W          | 72 W         | 12V / 24 VDC  | 12V / 24V      |

## Specifications

Compatible with 12 VDC and 24 VDC systems  
 Maximum load: 3A (36W at 12V / 72W at 24V)  
 On/off and dimming control from 100% to 10%  
 Works through materials up to 1-1/2" thick  
 Surface mount only  
 Includes 36" connection wire  
 5-year warranty

## Finish

☐ **WH** White

## Note


Not compatible with DALI smart lights.  
 Designed for use with standard 12V or 24V constant-voltage systems only.

# SLIDE 24V

This 24V driver and dimmer connects to a 120V input, converting it to 24V and providing precise dimming control for your 24V low-voltage lighting.



DD2448

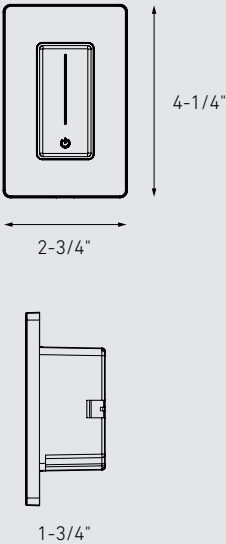

| Model  | Size   | Dimmer | Switch | Minimum load | Maximum load | Input voltage | Output voltage |
|--------|--------|--------|--------|--------------|--------------|---------------|----------------|
| DD2448 | 4-1/4" | ✓      | ✓      | 5 W          | 48 W         | 120 VAC       | 24 VDC         |

Specifications

LED driver and dimmer in one unit  
Indoor use only  
Input: 120 VAC ~ 1.0 A, 60 Hz  
Dimming range: 100% - 10%  
Dimming type: TRIAC edge cut  
Fits in a standard electrical box  
Single pole  
Works with all dimmable 24V lights  
5-year warranty

Finish



☐ WH White

Note

Does not work with DALI smart lights.  
Requires a neutral wire. Works in a single-pole setup only.

# SUPER-PUCK RECESSED

Enjoy energy-saving white light in a variety of attractive finishes. These LED pucks are well suited to accent and task lighting under cabinets and in other areas.

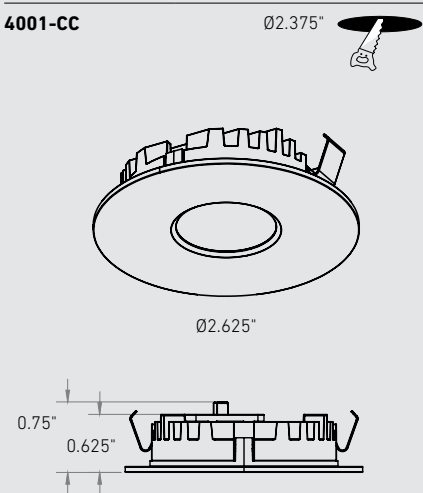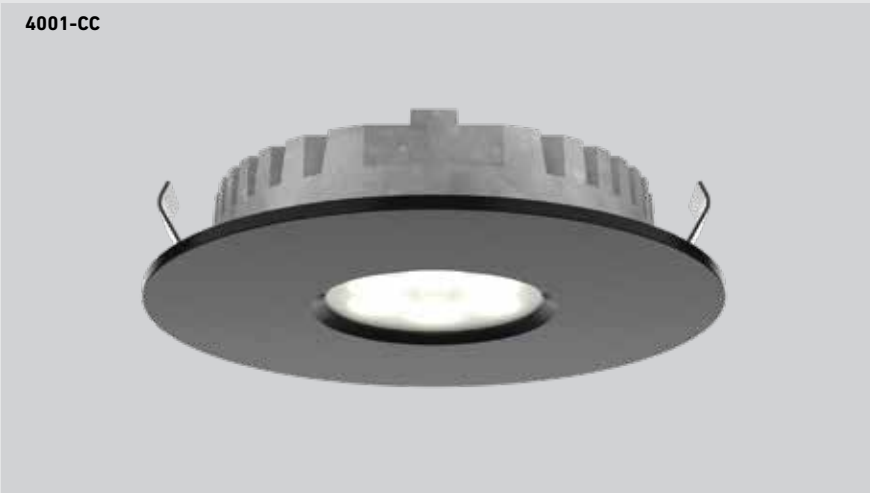

| Model   | Size    | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|---------|---------|-------|------------------|-----|--------------------------------|---------|
| 4001-CC | Ø2.625" | 3 W   | 150 lm           | 90  | 2700, 3000, 3500, 4000, 5000 K | 12 V    |

## Specifications

12 VDC LED driver required  
12" input lead with quick connector  
24" interconnection harness included  
Switch-selectable CCT  
Smooth 360° wide spread  
5-year warranty

## Power supplies: plug-in

**ETR-LED10WPI**  
12 VDC/10W class 2 LED driver  
**ETR-LED24WPI**  
12 VDC/24W class 2 LED driver

## Power supplies: hard-wired

**DD1260**  
2-in-1 12V driver and dimmer  
**BT06DIM-IC, BT12DIM-IC, BT24DIM-IC, BT36DIM, BT48DIM**  
12V dimmable hardwired drivers  
(6W, 12W, 24W, 36W, 48W)

## Finish

● **BK** Black  
● **GD** Gold  
○ **SN** Satin Nickel  
○ **WH** White

## Accessories

**4000-E24**  
24" extension cord  
**4000-E60**  
60" extension cord  
**4000HRNS-24**  
24" interconnection harness

## Note

Plug-in or hard-wired power supply required for installation. Sold separately.  
Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.




# DUO-PUCK

These robust LED pucks, equipped with a frosted lens, deliver highly efficient punches of white light, making them well-suited for under-cabinet lighting and various other applications.





## 4005-CC

Ø2.375"



Ø2.625"



Ø3"

| Model                           | Size    | Watts | Delivered lumens | CRI | Color °T                               | Voltage |
|---------------------------------|---------|-------|------------------|-----|----------------------------------------|---------|
| <b>4005-CC</b>                  | Ø2.625" | 2 W   | 138 lm           | 80  | 2700 K/ 3000 K/ 3500 K/ 4000 K/ 5000 K | 12 V    |
| *Per fixture<br><b>K4005-CC</b> | Ø2.625" | 2 W*  | 138 lm*          |     |                                        |         |

### Specifications

12 VDC LED driver required  
12" input lead with quick connector  
24" interconnection harness included  
Can be recessed or surface mounted  
Switch-selectable CCT  
Smooth 360° wide spread  
Kits available  
5-year warranty

### Power supplies: plug-in

**ETR-LED10WPI**  
12 VDC/10W class 2 LED driver  
**ETR-LED24WPI**  
12 VDC/24W class 2 LED driver

### Power supplies: hard-wired

**DD1260**  
2-in-1 12V driver and dimmer  
**BT06DIM-IC, BT12DIM-IC, BT24DIM-IC, BT36DIM, BT48DIM**  
12V dimmable hardwired drivers  
(6W, 12W, 24W, 36W, 48W)

### Finish

● **BK** Black  
○ **SN** Satin Nickel  
○ **WH** White

### Accessories


**4000-E24**  
24" extension cord  
**4000-E60**  
60" extension cord  
**4000HRNS-24**  
24" interconnection harness

### Note

Plug-in or hard-wired power supply required for installation. Sold separately.  
Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# MINI-PUCK

Enjoy complete flexibility with our mini LED pucks. Feel free to recess, surface mount, or direct-wire these directional pucks to achieve your desired lighting effect.

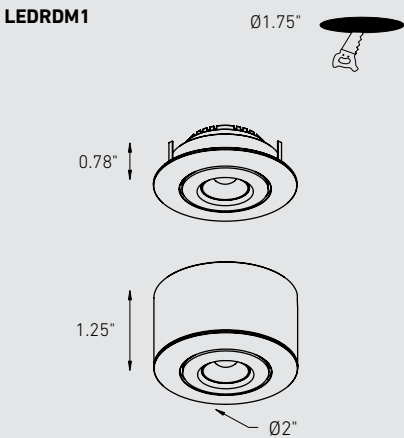

| Model   | Size | Watts | Delivered lumens | CRI | Color °T | Voltage |
|---------|------|-------|------------------|-----|----------|---------|
| LEDRDM1 | Ø2"  | 1.1 W | 80 lm            | 80  | 3000 K   | 12 V    |

## Specifications

12 VDC LED driver required  
12" input lead with quick connector  
24" interconnection harness included  
Smooth 360° wide spread  
Can be recessed or surface mounted  
Surface adapter included  
Gimbal LED module  
5-year warranty

## Power supplies: plug-in

**ETR-LED10WPI**  
12 VDC/10W class 2 LED driver  
**ETR-LED24WPI**  
12 VDC/24W class 2 LED driver

## Power supplies: hard-wired

**DD1260**  
2-in-1 12V driver and dimmer  
**BT06DIM-IC, BT12DIM-IC, BT24DIM-IC, BT36DIM, BT48DIM**  
12V dimmable hardwired drivers (6W, 12W, 24W, 36W, 48W)

## Finish

**BK** Black  
**SBA** Sandblasted aluminum  
**WH** White

## Accessories

**4000-E24**  
24" extension cord  
**4000-E60**  
60" extension cord  
**4000HRNS-24**  
24" interconnection harness

## Note



Plug-in or hard-wired power supply required for installation. Sold separately.  
Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# ECO-PUCK

The sleek design of this LED puck makes it the ideal choice for cabinet and kitchen lighting applications. It can be dimmed to create just the right ambiance for your decor.



LEDRDP18



| Model    | Size   | Watts | Delivered lumens | CRI | Color °T | Voltage |
|----------|--------|-------|------------------|-----|----------|---------|
| LEDRDP18 | Ø2.75" | 1.7 W | 100 lm           | 80  | 3000 K   | 12 V    |

## Specifications

12 VDC LED driver required  
12" input lead with quick connector  
24" interconnection harness included  
Recessed or surface mounted installation  
Surface adapter included  
Smooth 360° wide spread  
5-year warranty

## Power supplies: plug-in

**ETR-LED10WPI**  
12 VDC/10W class 2 LED driver  
**ETR-LED24WPI**  
12 VDC/24W class 2 LED driver

## Power supplies: hard-wired

**DD1260**  
2-in-1 12V driver and dimmer  
**BT06DIM-IC, BT12DIM-IC, BT24DIM-IC, BT36DIM, BT48DIM**  
12V dimmable hardwired drivers  
(6W, 12W, 24W, 36W, 48W)

## Finish

☐ **WH** White

## Accessories


**4000-E24**  
24" extension cord  
**4000-E60**  
60" extension cord  
**4000HRNS-24**  
24" interconnection harness

## Note

Plug-in or hard-wired power supply required for installation. Sold separately.  
Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# COB-TAPE

This tape will not only emit a wonderful warm glow but also provide you with continuous, seamless light. You can cut it every inch and reattach it with the supplied connectors. No more waste.

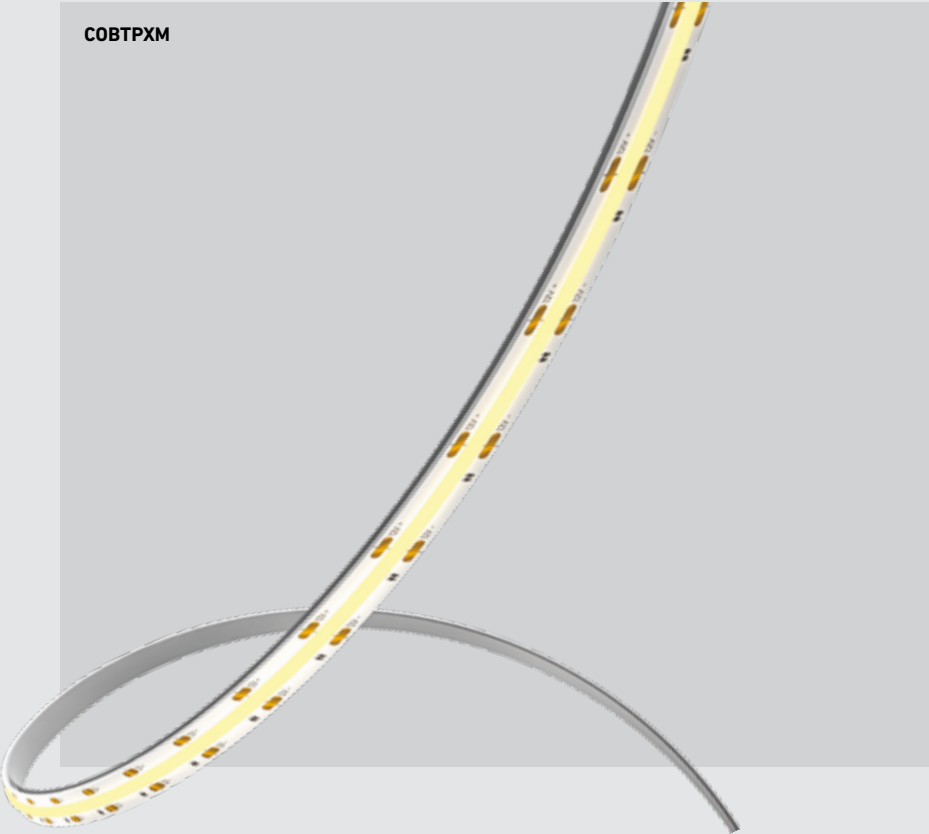

3000k

COLOR TEMPERATURE

  
DRY

  
12V  
VOLTAGE


  
ETL  
Intertek

| Model       | Size      | Watts      | Delivered lumens | CRI | Color °T | Voltage |
|-------------|-----------|------------|------------------|-----|----------|---------|
| COBTP3M     | 3m (118") | 24 W       | 1500 lm          | 90  | 3000 K   | 12 V    |
| COBTP5M     | 5m (196") | 48 W       | 2250 lm          |     |          |         |
| COBTP-REEL* | 20m (65') | 8 W /meter | 500 lm /meter    |     |          |         |

\*20m COB reels do not include a 12V driver. Plug-in or hard-wired power supply required for installation. Sold separately.

|                    |               |
|--------------------|---------------|
| <b>COBTP3M</b>     | 1 x 3m        |
| <b>COBTP5M</b>     | 1 x 5m        |
| <b>COBTP-REEL*</b> | 1 x 20m (65') |

\* Driver not included

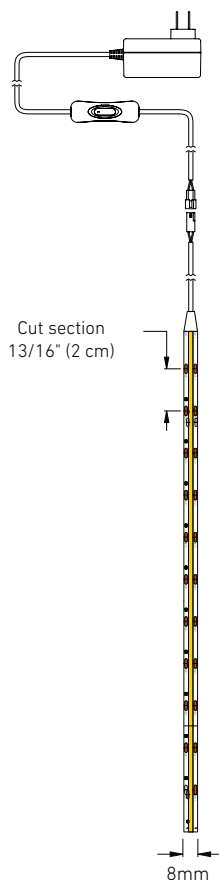

## Specifications

12 VDC LED plug-in driver included  
(3m=24w / 5m=48w)  
Seamless light emission (360 LEDs/meter)  
Can be cut at every cut mark (every 2 cm)  
Maximum run length of 5m (196") in a series  
Dimmable with DALI dimming  
power supply and most low-voltage  
electronic dimmers  
5-year warranty

## Power supplies: plug-in

**ETR-LED10WPI**  
12 VDC/10W class 2 LED driver

**ETR-LED24WPI**  
12 VDC/24W class 2 LED driver

## Power supplies: hard-wired

**DD1260**  
2-in-1 12V driver and dimmer

**BT06DIM-IC, BT12DIM-IC, BT24DIM-IC,  
BT36DIM, BT48DIM**  
12V dimmable hardwired drivers  
(6W, 12W, 24W, 36W, 48W)

## Accessories

**COBTP-EXT02**  
2" extension with reconnect connectors

**COBTP-EXT24**  
24" extension with reconnect connectors


**COBTP-EXT60**  
60" extension with reconnect connectors

**COBTP-CC06**  
Connection cord for hard-wired  
driver installation


**ALXT-REXFT / ALXT-SURXFT**  
3' and 6' aluminum extrusions, recessed or  
surface-mounted, in black or white finishes

**ALXT-REC-20FTLENS /  
ALXT-SUR-20FTLENS**  
20' frosted lenses for recessed and surface  
extrusions, black or white finishes


# SLIDE 12V



Replace your 12V driver with this 12V dimmer switch with an integrated driver to control the brightness of your low voltage lights. Connect this unit to your 120V input current, and all your lights will dim to a nice, soft glow.

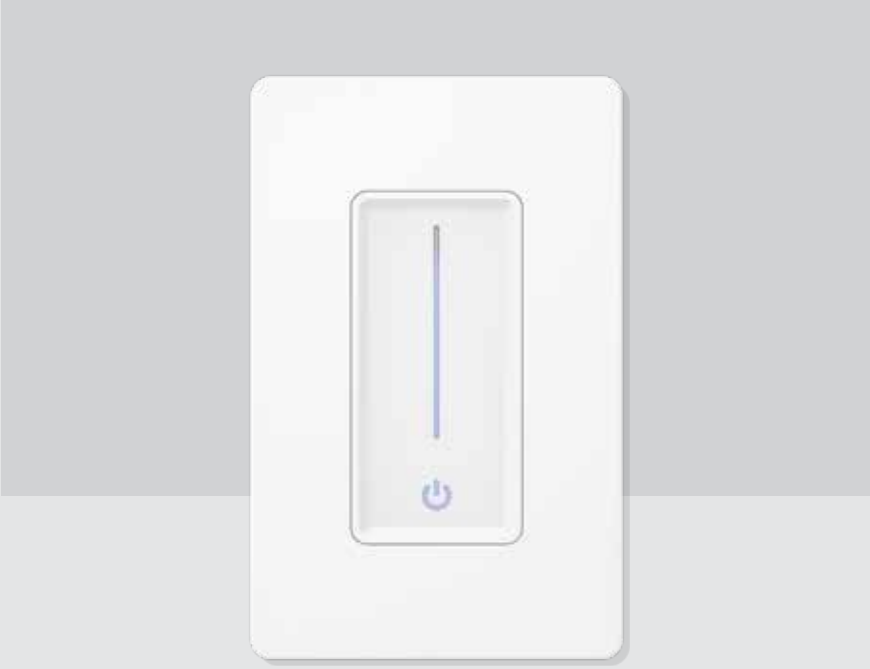

DD1260

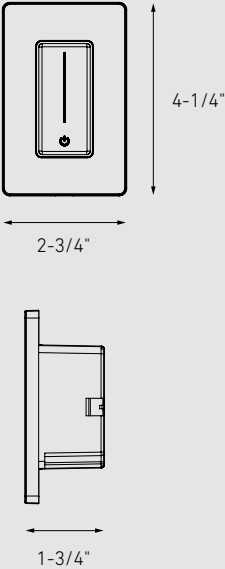

| Model  | Size   | Dimmer | Switch | Minimum load | Maximum load | Input voltage | Output voltage |
|--------|--------|--------|--------|--------------|--------------|---------------|----------------|
| DD1260 | 4-1/4" | ✓      | ✓      | 5 W          | 60 W         | 120 VAC       | 12 VDC         |

### Specifications

LED driver and dimmer in one unit  
Indoor use only  
Input: 120 VAC ~ 1.0 A, 60 Hz  
Dimming range: 100% - 10%  
Dimming type: TRIAC edge cut  
Fits in a standard electrical box  
Single pole  
Works with all dimmable 12V lights  
5-year warranty

### Finish

☐ **WH** White

### Note


Does not work with DALI smart lights.  
Requires a neutral wire. Works in a single-pole setup only.

# 12V LED DIMMABLE DRIVERS


Enjoy smooth, precise dimming with our 12V LED Dimmable Drivers. Designed for consistent performance and control, they allow effortless adjustment of light output to match the time of day and the specific needs of your 12V fixtures.




**BT12DIM-IC**

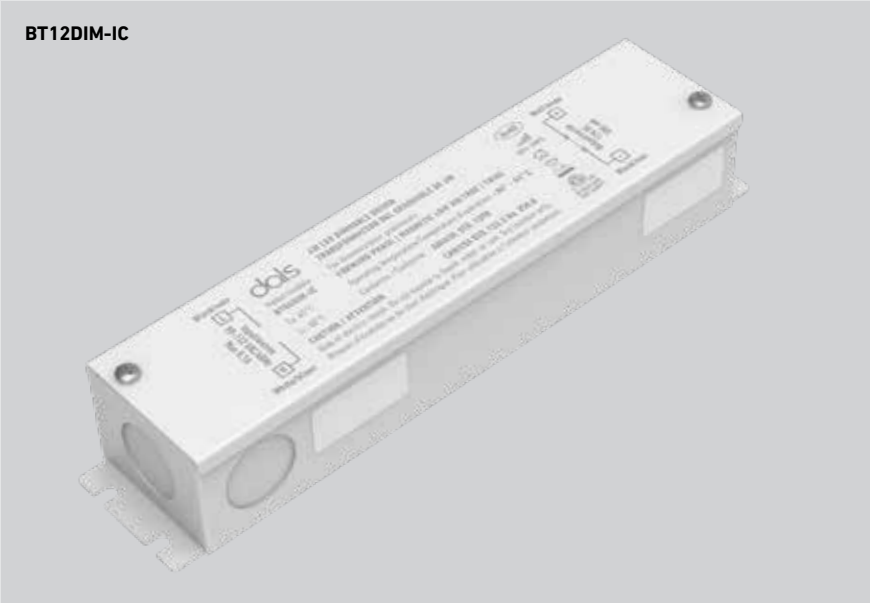

**BT06DIM-IC / BT12DIM-IC**



**BT24DIM-IC / BT36DIM / BT48DIM**



| Model              | Watts | Input voltage            | Output voltage | Dimming type           |
|--------------------|-------|--------------------------|----------------|------------------------|
| <b>BT06DIM-IC*</b> | 6 W   | 100 VAC-230 VAC, 50/60Hz | 12 VDC         | TRIAC / ELV compatible |
| <b>BT12DIM-IC*</b> | 12 W  |                          |                |                        |
| <b>BT24DIM-IC*</b> | 24 W  |                          |                |                        |
| <b>BT36DIM</b>     | 36 W  |                          |                |                        |
| <b>BT48DIM</b>     | 48 W  |                          |                |                        |

## Specifications

Constant voltage mode power supply  
AC-dimming supply  
(with TRIAC or ELV dimmer)  
Protection: short circuit / Over voltage  
Integrated junction box for  
hard-wire installation  
Fully isolated metal case -  
Cooling by air convection  
Optimal dimming when used at 50%  
or more of total load  
Load Range: 50% to 100%  
Operating temperature: -30°C to 45°C  
5-year warranty

## Finish


☐ **WH** White

## Note

Other wattage or voltage configurations are available upon request. Custom models may require minimum order quantities (MOQs) and extended lead times. Contact your DALI representative for details.

# POWERLED PUCK

Simplifying life for our customers is always a priority for us. With a direct 120V driverless connection, we have achieved our goal with our PowerLED pucks.

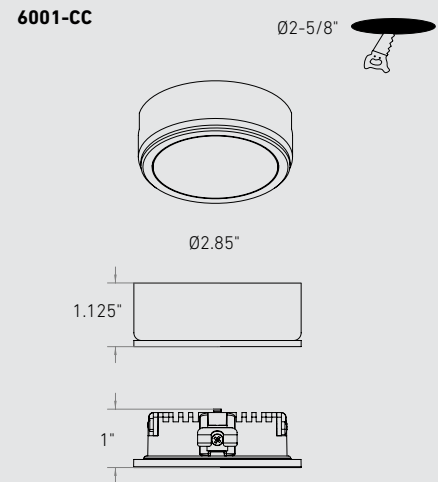

| Model   | Size    | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|---------|---------|-------|------------------|-----|--------------------------------|---------|
| 6001-CC | Ø2.875" | 4 W   | 235 lm           | 90  | 2700, 3000, 3500, 4000, 5000 K | 120 V   |

## Specifications

12" input and output lead with quick connector  
 Can be hardwired to a junction box  
 Can be interconnected  
 Switch-selectable CCT  
 Recessed or surface mounted installation  
 Surface adapter included  
 Smooth 360° wide spread  
 Aluminum construction  
 5-year warranty

## Finish

- **BK** Black
- **SN** Satin Nickel
- **WH** White

## Accessories

**6000-JB**  
 Junction box for 120 V series with one 12" extension cord  
**6001-PC**  
 72" power cord  
**6001-E24, 6001-E60**  
 24" and 60" extension cords

## Note

Junction box model 6000-JB or power cord model 6001-PC are required for installation. Sold separately.  
 Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.




# POWERLED LINEAR



Long runs and flexibility are the primary features of our smooth PowerLED linears. A sleek, driverless connection ensures smooth and continuous light in every application.



## 6009CC




## 6012CC




## 6024CC



## 6036CC



## 6048CC



| Model  | Size | Watts | Delivered lumens | CRI | Color °T                                  | Voltage |
|--------|------|-------|------------------|-----|-------------------------------------------|---------|
| 6009CC | 9"   | 3 W   | 250 lm           | 80  | 2700 K/ 3000 K/ 3500 K/<br>4000 K/ 5000 K | 120 V   |
| 6012CC | 12"  | 4 W   | 330 lm           |     |                                           |         |
| 6024CC | 24"  | 8 W   | 675 lm           |     |                                           |         |
| 6036CC | 36"  | 12 W  | 1080 lm          |     |                                           |         |
| 6048CC | 48"  | 16 W  | 1300 lm          |     |                                           |         |

## Specifications

Switch-selectable CCT  
Dimmable with regular low-voltage electronic dimmers  
Swivel mounting brackets included  
Smooth linear wide spread  
Multiple fixtures can be linked together (up to 200W)  
5-year warranty

## Finish

 **SBA** Sandblasted aluminum

## Note

Junction box model 6000-JB or power cord model 6000-ACCPC are required for installation. Sold separately.

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.

## Accessories

**6000-ACCE06**  
6" extension cord  
**6000-ACCE24**  
24" extension cord  
**6000-ACCE60**  
60" extension cord  
**6000-ACCLR**  
Kit of left and right L connectors  
**6000-ACCPC**  
6' power cord  
**6000-JB**  
Junction box


# COUNTERLED LINEAR



When designing a linear, we always want our customers to have flexibility at their fingertips. This has become a reality with our CCT linear, as the toggle switch gives you the ability to choose between three color temperatures.




**9009CC-WH**



**9012CC-WH**




**9018CC-WH**



**9024CC-WH**



**9030CC-WH**



| Model             | Size | Watts | Delivered lumens | CRI | Color °T                               | Voltage |
|-------------------|------|-------|------------------|-----|----------------------------------------|---------|
| <b>9009CC-WH*</b> | 9"   | 3.5 W | 200 lm           | 90  | 2700 K/ 3000 K/ 4000 K                 | 120 V   |
| <b>9012CC-WH</b>  | 12"  | 4 W   | 335 lm           |     | 2700 K/ 3000 K/ 3500 K/ 4000 K/ 5000 K |         |
| <b>9018CC-WH</b>  | 18"  | 8 W   | 560 lm           |     |                                        |         |
| <b>9024CC-WH</b>  | 24"  | 12 W  | 850 lm           |     |                                        |         |
| <b>9030CC-WH</b>  | 30"  | 16 W  | 1115 lm          |     |                                        |         |

## Specifications

Switch-selectable CCT  
120 V direct connection or plug-in\*  
Dimmable with regular low-voltage electronic dimmers  
Interconnectable  
5-year warranty

## Finish

☐ **WH** White


## Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.





## Accessories

**9000-ACCE24**  
24" extension cord  
**9000-ACCE72**  
72" extension cord

\*Model 9009CC is plug-in only and comes with three selectable CCTs: 2700K, 3000K, 4000K

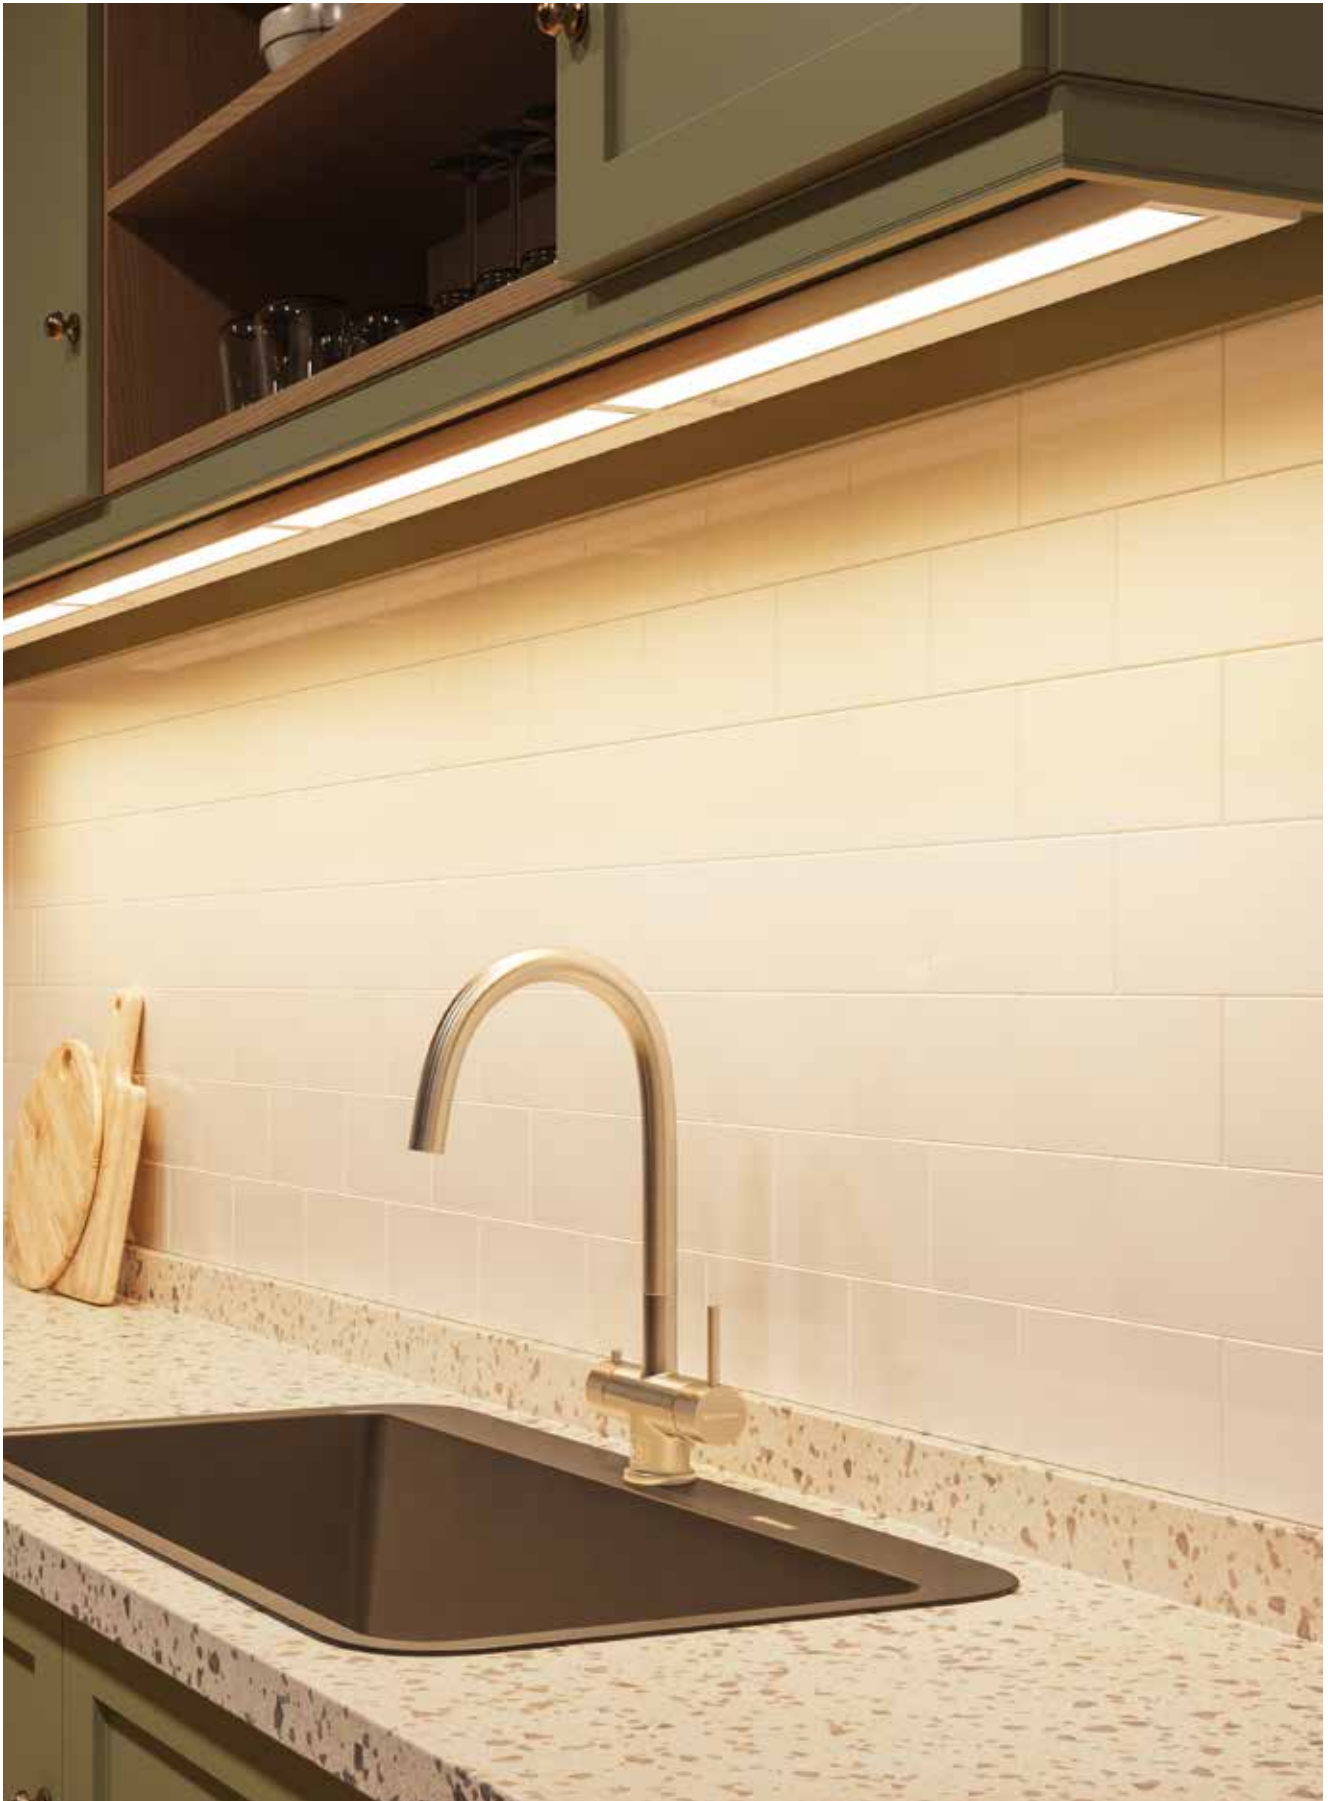

# ACCESSORIES





| 12V GENERAL ACCESSORIES                                                                                                                   |                                                                                    |             |        |                                                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Title                                                                                                                                     |                                                                                    | Model       | Finish | Specification                                                                                                                                           |
| <b>LED EXTENSION ACCESSORY</b><br><br><small>DRY</small> |   | 4000-E24    | Black  | <ul style="list-style-type: none"> <li>• 24" extension cord for 12 V LED products</li> <li>• Quick-connect installation</li> </ul>                      |
| <b>LED EXTENSION ACCESSORY</b><br><br><small>DRY</small> |   | 4000-E60    | Black  | <ul style="list-style-type: none"> <li>• 60" extension cord for 12 V LED products</li> <li>• Quick-connect installation</li> </ul>                      |
| <b>LED HARNESS ACCESSORY</b><br><br><small>DRY</small>   |   | 4000HRNS-24 | Black  | <ul style="list-style-type: none"> <li>• 24" interconnection harness for 12 V LED products</li> <li>• Quick-connect installation</li> </ul>             |
| <b>LED HARNESS ACCESSORY</b><br><br><small>DRY</small> |  | LEDHRNS-6   | Black  | <ul style="list-style-type: none"> <li>• 24" 6 direction interconnection harness for 12 V LED products</li> <li>• Quick-connect installation</li> </ul> |

## 12V 3000K COB-TAPE ACCESSORIES

|                                                                                                                           |                                                                                     | Model                              | Finish         | Specifications                                                                                                                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EXTRUSIONS</b><br>                    |    | ALXT-SURXFT<br>ALXT-RECXFT         | Black<br>White | <ul style="list-style-type: none"> <li>• 3 ft. &amp; 6 ft. – black &amp; white surface-mounted aluminum extrusions</li> <li>• 3 ft. &amp; 6 ft. – black &amp; white recessed aluminum extrusions</li> <li>• Accessories included: End caps, clips, and screws</li> </ul> |
| <b>EXTRUSIONS</b><br>                    |    | ALXT-SURXFTLENS<br>ALXT-RECXFTLENS | Black<br>White | <ul style="list-style-type: none"> <li>• 20 ft. – black &amp; white lens for surface-mounted aluminum extrusions</li> <li>• 20 ft. – black &amp; white lens for recessed aluminum extrusions</li> </ul>                                                                  |
| <b>COB-TAPE<br/>EXTENSION CORD</b><br>   |    | COBTP-CC06                         | White          | <ul style="list-style-type: none"> <li>• 6 in. connection cord for hard-wired driver installation for COB tape</li> </ul>                                                                                                                                                |
| <b>COB-TAPE<br/>EXTENSION CORD</b><br>  |   | COBTP-EXT02                        | White          | <ul style="list-style-type: none"> <li>• 2 in. extension cord with reconnect connectors for COB tape</li> </ul>                                                                                                                                                          |
| <b>COB-TAPE<br/>EXTENSION CORD</b><br> |  | COBTP-EXT24                        | White          | <ul style="list-style-type: none"> <li>• 24 in. extension cord with reconnect connectors for COB tape</li> </ul>                                                                                                                                                         |
| <b>COB-TAPE<br/>EXTENSION CORD</b><br> |  | COBTB-EXT60                        | White          | <ul style="list-style-type: none"> <li>• 60 in. extension cord with reconnect connectors for COB tape</li> </ul>                                                                                                                                                         |

# ACCESSORIES






## 12V SWIVLED ACCESSORIES

|                                                                                                                            |                                                                                     | Model               | Finish | Specifications                                                                                                                                                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SWIVLED EXTENSION CORD</b><br>         |    | SWIVLEDCC-EXT10     | White  | <ul style="list-style-type: none"> <li>• 10" extension cord for SwivLED series</li> <li>• One end with male connector and one end with female connector</li> <li>• Can be connected together</li> <li>• Quick-connect installation</li> </ul>        |
| <b>SWIVLED EXTENSION CORD</b><br>         |    | SWIVLEDCC-EXT36     | White  | <ul style="list-style-type: none"> <li>• 36" extension cord for SwivLED series strips</li> <li>• One end with male connector and one end with female connector</li> <li>• Can be connected together</li> <li>• Quick-connect installation</li> </ul> |
| <b>SWIVLED EXTENSION CORD</b><br>         |    | SWIVLEDCC-EXT60     | White  | <ul style="list-style-type: none"> <li>• 60" extension cord for SwivLED series strips</li> <li>• One end with male connector and one end with female connector</li> <li>• Can be connected together</li> <li>• Quick-connect installation</li> </ul> |
| <b>SWIVLED MOUNTING BRACKETS</b><br>    |  | SWIVLEDACC-45VCLIP  | Chrome | <ul style="list-style-type: none"> <li>• 45 Degree Brackets for SwivLED Series</li> </ul>                                                                                                                                                            |
| <b>SWIVLED CONNECTION ACCESSORY</b><br> |  | SWIVLED-CC10-OUTPUT | White  | <ul style="list-style-type: none"> <li>• 10" extension cord for SwivLED series</li> <li>• One end with male connector and one end with female connector</li> <li>• Can be connected together</li> <li>• Quick-connect installation</li> </ul>        |

## 12V / 24V LOW-VOLTAGE WIRING





|                                                                                                                           |                                                                                     | Model                                   | Finish | Specifications                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LOW-VOLTAGE CONNECTION WIRE</b><br> |  | UCBL-20-18<br>UCBL-50-18<br>UCBL-100-18 | White  | <ul style="list-style-type: none"> <li>• Available in 20 ft., 50 ft., and 100 ft. lengths</li> <li>• 18-gauge wire for low-voltage applications</li> </ul> |

## 24V 5CCT COB-TAPE ACCESSORIES

|                                                                                                                             |                                                                                     | Model                              | Finish         | Specifications                                                                                                                                                                                              |
|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EXTRUSIONS</b><br>                      |    | ALXT-SURXFT<br>ALXT-RECXFT         | Black<br>White | <ul style="list-style-type: none"> <li>• 3 ft. &amp; 6 ft. – black &amp; white surface-mounted aluminum extrusions</li> <li>• 3 ft. &amp; 6 ft. – black &amp; white recessed aluminum extrusions</li> </ul> |
| <b>EXTRUSIONS</b><br>                      |    | ALXT-SURXFTLENS<br>ALXT-RECXFTLENS | Black<br>White | <ul style="list-style-type: none"> <li>• 20 ft. – black &amp; white lens for surface-mounted aluminum extrusions</li> <li>• 20 ft. – black &amp; white lens for recessed aluminum extrusions</li> </ul>     |
| <b>30W 24V COB-TAPE PLUG-IN DRIVER</b><br> |    | COBTP24V-ETR30                     | White          | <ul style="list-style-type: none"> <li>• 30W Plug-in driver for 24V COB tape</li> </ul>                                                                                                                     |
| <b>60W 24V COB-TAPE PLUG-IN DRIVER</b><br> |    | COBTP24V-ETR60                     | White          | <ul style="list-style-type: none"> <li>• 60W Plug-in driver for 24V COB tape</li> </ul>                                                                                                                     |
| <b>COB-TAPE I-CONNECTOR</b><br>           |   | COBTP24V-ACCI                      | White          | <ul style="list-style-type: none"> <li>• I-shaped connector (strip-to-strip)</li> </ul>                                                                                                                     |
| <b>COB-TAPE L-CONNECTOR</b><br>          |  | COBTP24V-ACCL                      | White          | <ul style="list-style-type: none"> <li>• L-shaped connector (strip-to-strip)</li> </ul>                                                                                                                     |
| <b>COB-TAPE EXTENSION CABLE</b><br>      |  | COBTP24V-EXT24                     | White          | <ul style="list-style-type: none"> <li>• 24" extension cable</li> </ul>                                                                                                                                     |
| <b>COB-TAPE EXTENSION CABLE</b><br>      |  | COBTP24V-EXT60                     | White          | <ul style="list-style-type: none"> <li>• 60" extension cable</li> </ul>                                                                                                                                     |
| <b>COB-TAPE EXTENSION CABLE</b><br>      |  | COBTP24V-EXT120                    | White          | <ul style="list-style-type: none"> <li>• 120" extension cable</li> </ul>                                                                                                                                    |
| <b>COB-TAPE CABLE FOR CONTROLLER</b><br> |  | COBTP24V-CC36                      | White          | <ul style="list-style-type: none"> <li>• 36" extension cable (strip-to-controller)</li> </ul>                                                                                                               |
| <b>COB-TAPE CCT CONTROLLER</b><br>       |  | COBTP24V-SWT                       | White          | <ul style="list-style-type: none"> <li>• CCT controller</li> </ul>                                                                                                                                          |









# 120V ACCESSORIES

## 120V POWERLED PUCK ACCESSORIES

| Model                                                                                                         |                                                                                                                                                                                                                                                                         | Compatibility | Finish | Specification                                                                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>6000-JB</b><br><br>DRY    |  | 6001          | White  | <ul style="list-style-type: none"> <li>• Hardwire junction box for PowerLed pucks and linears series</li> <li>• Quick-connect installation</li> <li>• Allows hard-wired 120V setup</li> </ul>                   |
| <b>6001-PC</b><br><br>DRY    |                                                                                                                                                                                        | 6001          | White  | <ul style="list-style-type: none"> <li>• 72" power cord for PowerLed pucks</li> <li>• On/off switch on cord</li> <li>• Quick-connect installation</li> <li>• Plug-in version</li> </ul>                         |
| <b>6001-E24</b><br><br>DRY  |                                                                                                                                                                                        | 6001          | White  | <ul style="list-style-type: none"> <li>• 24" extension cord for PowerLed pucks series</li> <li>• One end with male connector and one end with female connector</li> <li>• Quick-connect installation</li> </ul> |
| <b>6001-E60</b><br><br>DRY |                                                                                                                                                                                      | 6001          | White  | <ul style="list-style-type: none"> <li>• 60" extension cord for PowerLed pucks series</li> <li>• One end with male connector and one end with female connector</li> <li>• Quick-connect installation</li> </ul> |



## 120V LINEAR ACCESSORIES

| Model                                                                                                     |                                                                                     | Compatibility                                  | Finish | Specification                                                                                                                                                                                                    |
|-----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>6000-JB</b><br>       |    | 6009CC<br>6012CC<br>6024CC<br>6036CC<br>6048CC | White  | <ul style="list-style-type: none"> <li>• Hardwire junction box for PowerLED pucks and linears series</li> <li>• Quick-connect installation</li> <li>• Allows hard-wired 120V setup</li> </ul>                    |
| <b>6000-ACCPC</b><br>    |    | 6009CC<br>6012CC<br>6024CC<br>6036CC<br>6048CC | White  | <ul style="list-style-type: none"> <li>• 72" power cord for PowerLED linear series</li> <li>• On/off switch on cord</li> <li>• Quick-connect installation</li> <li>• Plug-in version</li> </ul>                  |
| <b>6000-ACCE06</b><br>   |    | 6009CC<br>6012CC<br>6024CC<br>6036CC<br>6048CC | White  | <ul style="list-style-type: none"> <li>• 6" extension cord for PowerLED linear series</li> <li>• One end with male connector and one end with female connector</li> <li>• Quick-connect installation</li> </ul>  |
| <b>6000-ACCE24</b><br>  |   | 6009CC<br>6012CC<br>6024CC<br>6036CC<br>6048CC | White  | <ul style="list-style-type: none"> <li>• 24" extension cord for PowerLED linear series</li> <li>• One end with male connector and one end with female connector</li> <li>• Quick-connect installation</li> </ul> |
| <b>6000-ACCE60</b><br> |  | 6009CC<br>6012CC<br>6024CC<br>6036CC<br>6048CC | White  | <ul style="list-style-type: none"> <li>• 60" extension cord for PowerLED linear series</li> <li>• One end with male connector and one end with female connector</li> <li>• Quick-connect installation</li> </ul> |
| <b>6000-ACCLR</b><br>  |  | 6009CC<br>6012CC<br>6024CC<br>6036CC<br>6048CC | White  | <ul style="list-style-type: none"> <li>• Kit of left and right L connectors</li> </ul>                                                                                                                           |
| <b>9000-ACCE24</b><br> |  | 9009CC<br>9012CC<br>9018CC<br>9024CC<br>9030CC | White  | <ul style="list-style-type: none"> <li>• 24" extension cord for 9000 series linears</li> <li>• One end with male connector and one end with female connector</li> <li>• Quick-connect installation</li> </ul>    |
| <b>9000-ACCE72</b><br> |  | 9009CC<br>9012CC<br>9018CC<br>9024CC<br>9030CC | White  | <ul style="list-style-type: none"> <li>• 72" extension cord for 9000 series linears</li> <li>• One end with male connector and one end with female connector</li> <li>• Quick-connect installation</li> </ul>    |





FORMS



**112**  
**PILLAR**  
PIL08 / PIL42-CC




**118**  
**FUSION**  
TLPF12 / TLPF21-CC



**120**  
**NAPA**  
NAPF20 / NAPF30-CC



**122**  
**IRIS**  
IRPD-CC




**124**  
**BOULEVARD PENDANT**  
LNPD48-CC  
LNPDSC48-CC  
DCP-LNPD48



**128**  
**PINPOINT**  
MSLPD48 /  
MSLPD72-CC



**130**  
**BEAM**  
SPD48 / SPD72-CC



**132**  
**CURRENT**  
SLPD60-CC



**134**  
**TWIRL**  
TWPD-CC



**136**  
**ATOM PENDANT**  
FPD60-CC



**136**  
**ATOM ONE**  
FPD-CC



**138**  
**CIRCA**  
RGPD24-CC



**140**  
**PYRA**  
TRPD34-CC



**142**  
**ASTERISK**  
SSPD32-CC



**144**  
**NOVA**  
PDC18-CC



**146**  
**FOCUS**  
CYL05-CC  
CYL06-CC-V



**124**  
**BOULEVARD FLUSH MOUNT**  
LNFM48-CC



**142**  
**ASTERISK FLUSH MOUNT**  
SSFM20-CC



**120**  
**NAPA FLUSH MOUNT**  
NAPF20 / NAPF30-CC



**140**  
**PYRA FLUSH MOUNT**  
TRFM22-CC



**148**  
**AURORA**  
CFH12 / CFH21-CC



**150**  
**ORA**  
CFG13-CC



**152**  
**FUSION FLUSH MOUNT**  
TLFM12 / TLFM21-CC



**154**  
**DELTA**  
CFLEDR 6/10/14/18/24-CC  
CFLEDSQ6/10/14-CC



**158**  
**RADIANCE**  
FMM09 / FMM12-CC



**160**  
**PRIME**  
FMP05-CC  
FMP05M-CC  
FMP09/12-CC



162

**SHIFT**

VA032 / VA024-CC



164

**LEDGE**

VAL24-CC  
VAL36-CC



166

**ARIA**

VSW24 / VSW36-CC



168

**LYRA**

LEDVAN003-CC-24 / 32



170

**PORTRAIT**

VLG24 / VLG36-CC



172

**NOBLE**

LEDVAN001-CC-18 / 24



174

**BALANCE**

VCC24 / VCC36-CC



176

**VELA**

VAN002-CC-22 / 46



124

**BOULEVARD WALL**

LNWS48-CC



178

**PILLAR WALL**

PILW24-CC-UNV



182

**ADEN**

LWA12-CC  
LWS12-CC-V



184

**BROOKLYN**

LWB12-CC  
LWB12-CC-V



186

**PROFILE**

LWJ08 / LWJ16 /  
LWJ24-CC



128

**PINPOINT WALL**

MSLWALL-CC



188

**GEMINI**

SWS24 / SWS36 /  
SWS48 / SWS60-CC



190

**MIDNIGHT**

RWS24 / RWS48 /  
RWS60-CC



192

**SHIELD**

DSWC05-CC  
DSWC07-CC-V



194

**GENEVA**

LEDWALL-G-CC



196

**HARLOW**

LEDWALL-H



198

**CUBIX**

LEDWALL001D-CC



200

**ALTO**

SQS06/10/15



286

**FRAME**

DCP-CGWS



202

**RISE**

LSTP12-CC



200

**ALTO STEP**

SQSTP-CC



204

**ECHO**

LEDSTEP002D-CC



206

**PEARL**

LEDSTEP004D-CC



208

**CAMBER**

LEDSTEP005D-CC



210

**ASCEND**

LSTP07-CC



212

**GLAM**

RTL-3C



214

**ACCESSORIES**

# PILLAR

Pillar combines architectural form with creative flexibility. Available in 8" and 42" heights and finished in matte black or white, this cylindrical fixture makes a strong visual statement. Its modular system invites personalization, extension tubes for varied proportions, a glass globe for a refined glow, and felt disks in six curated tones that soften both light and sound. Designed for individuality and balance, Pillar allows you to define how bold or subtle it becomes.


## PIL08-CC EXAMPLE CONFIGURATION

**PILACCT-24  
EXTENSION TUBE – 24"**  
Mounted to the ceiling,  
this tube sets the desired  
height of the fixture.




**PIL08-CC  
FIXTURE BODY – 8"**  
Houses the integrated  
light engine and  
connects directly  
below the extension.

**PIL-ACCFD24  
FELT DISK –  
LIGHT BEIGE**  
Adds a warm, tactile  
accent and provides  
sound-dampening  
performance.

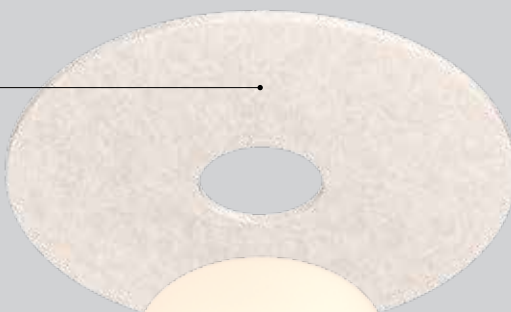

Includes a felt disk  
fastening ring for use  
when a glass globe is  
not desired.



**PIL-ACCGB  
GLASS GLOBE**  
Finishes the  
composition with a  
soft, diffused glow  
while securing the felt  
disk in place.



NEW



COLOR SELECT



WET

T24  
JA8

CERTIFIED



UNIVERSAL DRIVER



REPLACEABLE DRIVER



SOUND DAMPENING




Accessories for Pillar Flush-Mount Fixtures



8", 24", and 42"  
Extension tubes



Glass Globe

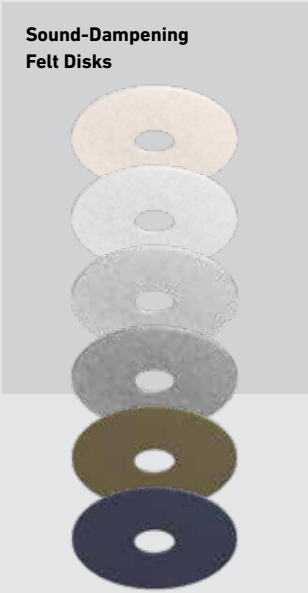

Sound-Dampening  
Felt Disks

More from this family



PILW24-CC-UNV  
pg. 178



NEW

# PILLAR

Pillar merges architectural form with creative flexibility. Available in 8" and 42" heights in matte black or white, this modular cylindrical fixture invites personalization with extension tubes, a glass globe, and felt disks in six tones that soften light and sound.



COLOR SELECT



WET

**T24  
JA8**  
CERTIFIED



UNIVERSAL DRIVER



REPLACEABLE DRIVER




SOUND DAMPENING



| Model               | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage ⚡                                            |
|---------------------|------|-------|------------------|-----|--------------------------------|------------------------------------------------------|
| <b>PIL08-CC-UNV</b> | 8"   | 34 W  | 2500 lm          | 90  | 2200, 2700, 3000, 3500, 4000 K | 120 / 277 / 347V<br>Triac, ELV, and<br>0-10V dimming |
| <b>PIL42-CC-UNV</b> | 42"  | 34 W  | 2500 lm          |     |                                |                                                      |




**PIL08-CC-UNV**  
**PIL42-CC-UNV**

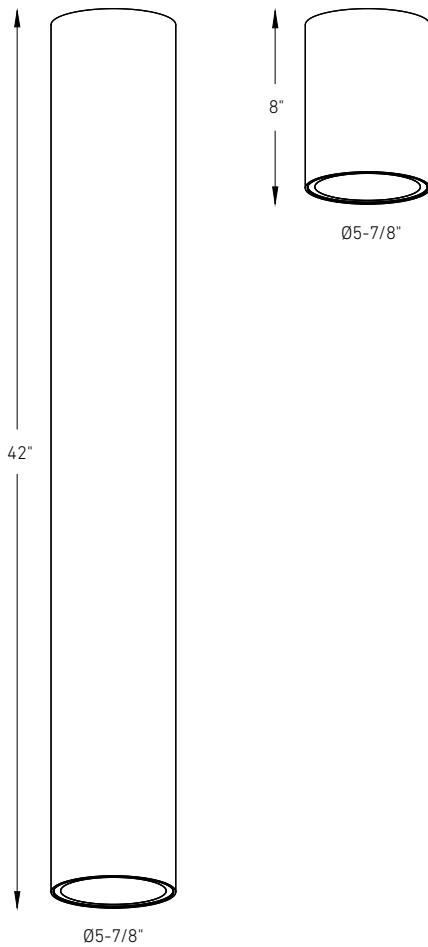


#### Flush-Mount Accessories


**PIL-ACCT08**  
**PIL-ACCT24**  
**PIL-ACCT42**



**PIL-ACCGB**



**PIL-ACCFD24**

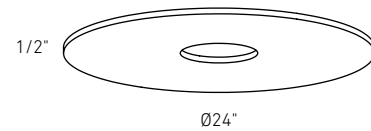

#### Specifications

Switch-selectable CCT  
36° beam angle  
Replaceable driver  
Universal voltage: 120V, 277V, or 347V input with TRIAC, ELV, and 0-10V dimming  
Canopy mounts on a 4" octagon junction box  
Felt disk accessories have an NRC of 0.8, helping reduce echo and background noise for a quieter environment  
5-year warranty

#### Finish

- **BK** Black
- **WH** White

#### Accessories

**PIL-ACCT08, PIL-ACCT24, PIL-ACCT42**  
8", 24", and 42" extension tubes for Pillar Series flush mounts. Available in black or white.

**PIL-ACCFD24**  
24" sound-dampening felt disk for Pillar Series flush mounts. Available in light beige, green, dark blue, light gray, medium gray, and dark gray.

**PIL-ACCGB**  
Glass globe for Pillar Series flush mounts.

#### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.  
The wall-mounted version does not support the accessory system.





NEW

# FUSION

The Fusion combines modern simplicity with flexible installation options, mounting as either a pendant with included power stems or as a semi-flush ceiling fixture. Its sleek, flat-disk design provides even, ambient illumination, making it a versatile choice for a variety of spaces.



COLOR SELECT



**T24  
JA8**  
CERTIFIED



UNIVERSAL DRIVER



| Model         | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage ⚡                                            |
|---------------|------|-------|------------------|-----|--------------------------------|------------------------------------------------------|
| TLPF12-CC-UNV | 12"  | 25 W  | 2500 lm          | 90  | 2700, 3000, 3500, 4000, 5000 K | 120 / 277 / 347V<br>Triac, ELV, and<br>0-10V dimming |
| TLPF21-CC-UNV | 21"  | 45 W  | 4400 lm          |     |                                |                                                      |



## Specifications

Can be mounted as either a pendant or a ceiling flush mount  
 Universal voltage driver supports 120V, 277V, or 347V input with both TRIAC and 0–10V dimming  
 Adjustable height up to 6'-8" with quick connect stems  
 Switch-selectable CCT  
 Canopy mount on 4" octagon junction box  
 5-year warranty


## Finish

- **BK** Black
- **WH** White


## Accessories

**NAPF20-ACCST24-BK**  
 24" black quick-connect Power Stem  
**NAPF20-ACCST24-WH**  
 24" white quick-connect Power Stem  
**ACCSTSL**  
 Power Stem sloped ceiling adapter

## TLPF12-CC-UNV

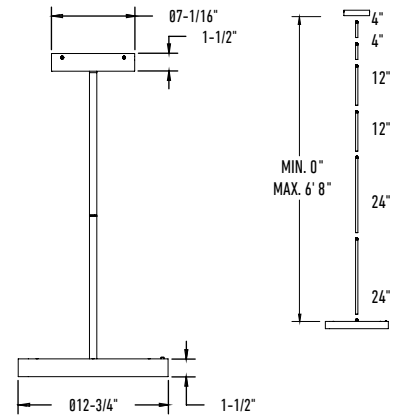

## TLPF21-CC-UNV

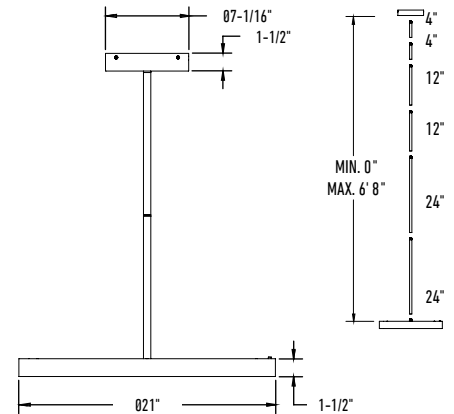

## Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# NAPA

The versatile Napa fixture features a timeless dome-shaped design and the flexibility to be mounted as either a pendant or a sleek ceiling flush mount. Its unique internal dome lens hides the light source, delivering a soft, gradient glow without glare.

NAPF20-CC-UNV



## Power Stems

Quick-connect, patent-pending stems that provide pendant power and support, allowing effortless installation, simply screw the desired length directly into the canopy, no wiring required.



COLOR SELECT



DRY

**T24  
JA8**  
CERTIFIED



LOW-GLARE



UNIVERSAL DRIVER



POWER STEMS



REPLACEABLE DRIVER



| Model         | Size | Watts | Delivered lumens | CRI | Color °T                          | Voltage ⚡                                            |
|---------------|------|-------|------------------|-----|-----------------------------------|------------------------------------------------------|
| NAPF20-CC-UNV | 20"  | 40 W  | 1825 lm          | 90  | 2700, 3000, 3500,<br>4000, 5000 K | 120 / 277 / 347V<br>Triac, ELV, and<br>0-10V dimming |
| NAPF30-CC-UNV | 30"  | 60 W  | 3330 lm          |     |                                   |                                                      |





## Specifications

Can be mounted as either a pendant or a ceiling flush mount  
 Universal voltage driver supports 120V, 277V, or 347V input with both TRIAC and 0–10V dimming  
 Unique internal dome lens hides the light source, delivering a soft, gradient glow.  
 Adjustable height up to 6'-8" with quick connect stems. (2x 4", 2x 12", 2x 24")  
 Switch-selectable CCT  
 Replaceable driver  
 Canopy mount on 4" octagon junction box  
 5-year warranty

## Finish

- **BK** Black
- **WH** White

## Accessories

### NAPF20-ACCST24-BK

24" black quick-connect Power Stem


### NAPF20-ACCST24-WH

24" white quick-connect Power Stem


### ACCSTSL

Power Stem sloped-ceiling adapter available in black and white

## NAPF20-CC-UNV

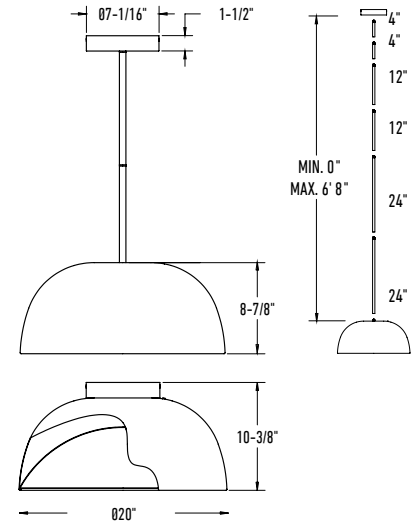

## NAPF30-CC-UNV

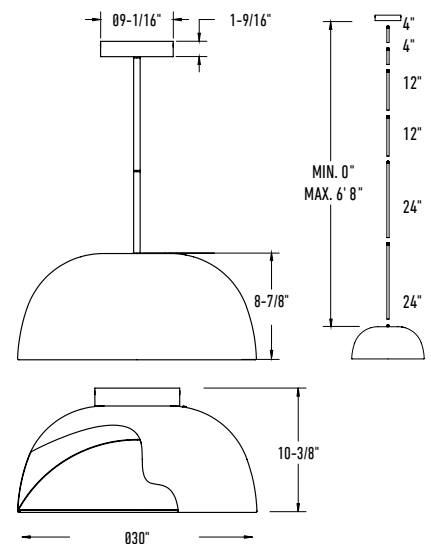

## Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.

# IRIS

Add a touch of elegance to any room with our 9-inch Iris pendant, featuring a sleek glass dome and the innovative Gravity Glide feature for effortless height adjustment. Available in multiple finishes, it's perfect for creating a sophisticated ambiance at home or in any professional setting.



DRY




GRAVITY GLIDE



| Model   | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|---------|------|-------|------------------|-----|--------------------------------|---------|
| IRPD-CC | 9"   | 12 W  | 760 lm           | 90  | 2700, 3000, 3500, 4000, 5000 K | 120 V   |



## IRPD-CC

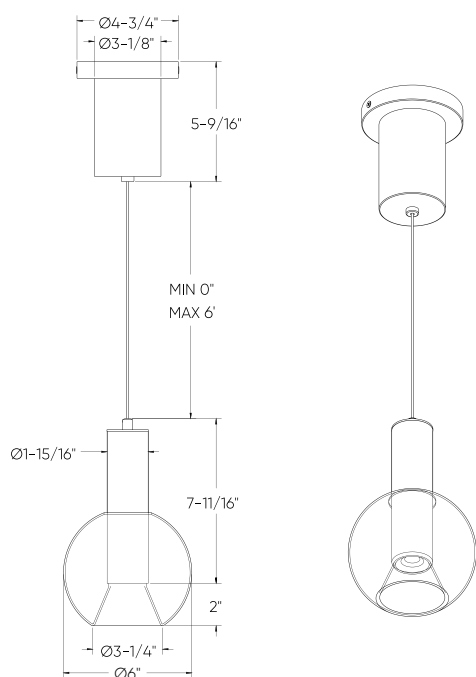

### Specifications

Adjustable height up to 6 feet  
Gravity Glide height adjustment allows you to effortlessly adjust the height of a pendant lamp by simply pulling or pushing the cord.  
Switch-selectable CCT  
Integrated dimmable driver  
Canopy mount on 4" octagon junction box  
5-year warranty

### Finish


- **BK** Black
- **GD** Gold
- **WH** White

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# BOULEVARD

The Boulevard series, a linear modular light fixture perfect for general office, home, and shop illumination. Can be interconnected to produce striking visual effects.

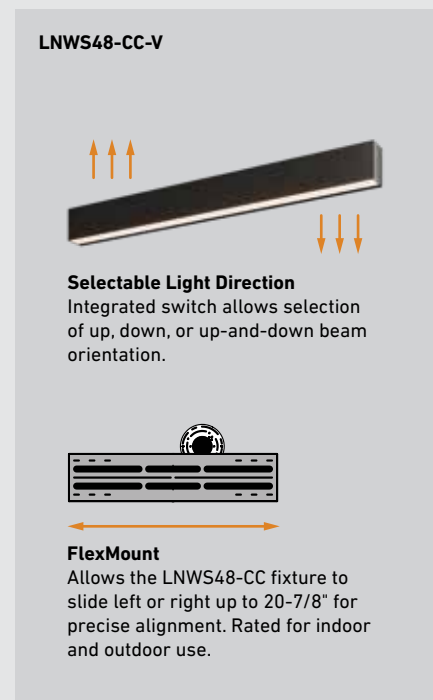

NEW



COLOR SELECT\*



DRY



WET\*

**T24  
JA8**  
CERTIFIED



FLEXMOUNT\*



SELECTABLE LIGHT DIRECTION\*




**Bluetooth**<sup>†</sup>




CHANGE COLORS†

**LNPDSC48-CC**

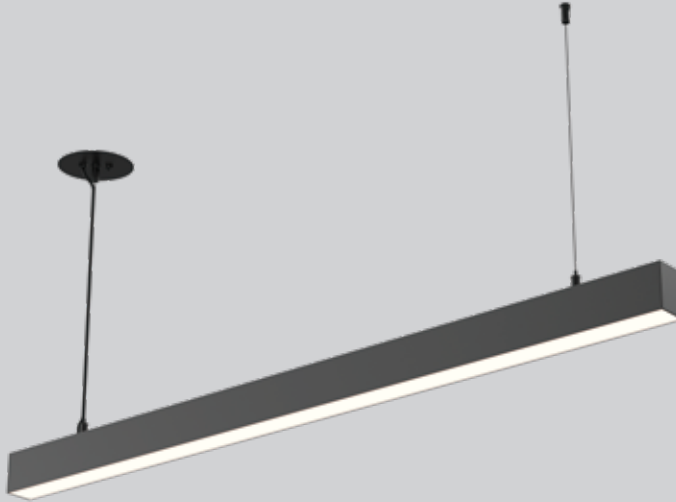

**LNPDSC-ACC90-CC**




#### More from this family



**LNR24-CC**  
**DCP-LNR24**  
pg. 48



**LNR48-CC**  
**DCP-LNR48**  
pg. 48



**LNR-ACC90-CC**  
pg. 48

\*FlexMount allows the LNWS48-CC fixture to slide left or right up to 20-7/8" for precise alignment.

Selectable Light Direction – integrated switch allows selection of up, down, or up-and-down beam orientation.

Available in 2200K, 2700K, 3000K, 3500K, and 4000K.

†DCP-LNPD48 only

NEW

# BOULEVARD

The Boulevard series, a linear modular light fixture perfect for general office, home, and shop illumination. Can be interconnected to produce striking visual effects.



**T24  
JA8**  
CERTIFIED



| Model                  | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage options ⚡                        |
|------------------------|------|-------|------------------|-----|--------------------------------|------------------------------------------|
| <b>LNPD48-CC</b>       | 48"  | 40 W  | 2805 lm          | 90  | 2700, 3000, 3500, 4000, 5000 K | <b>120V TRIAC dimming</b>                |
| <b>LNPDSC48-CC</b>     | 48"  | 40 W  | 2805 lm          |     |                                | or                                       |
| <b>LNFM48-CC</b>       | 48"  | 40 W  | 3000 lm          |     |                                | <b>V: 120 / 277 / 347V 0-10V dimming</b> |
| <b>LNPDSC-ACC90-CC</b> | 6"   | 6 W   | 420 lm           |     |                                |                                          |
| <b>LNWS48-CC-V</b>     | 48"  | 47 W  | 4000 lm          |     | 2200, 2700, 3000, 3500, 4000 K | <b>V: 120 / 277 / 347V 0-10V dimming</b> |
| <b>DCP-LNPD48</b>      | 48"  | 40 W  | 2620 lm          | 90  | RGB + 2700 K - 6500 K          | 120 V                                    |

\*FlexMount allows the LNWS48-CC fixture to slide left or right up to 20-7/8" for precise alignment.


Rated for indoor and outdoor use.

Adjustable Beam Direction – integrated switch allows selection of up, down, or up-and-down beam orientation.


Available in 2200K, 2700K, 3000K, 3500K, and 4000K.

\*DCP-LNPD48 only


## LNPD48-CC, DCP-LNPD48

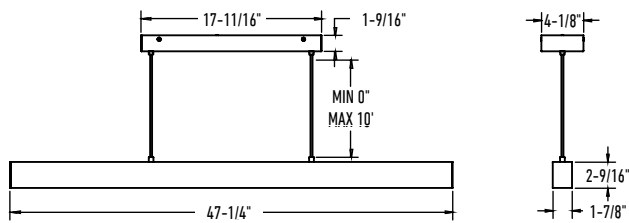


## LNPDS48-CC

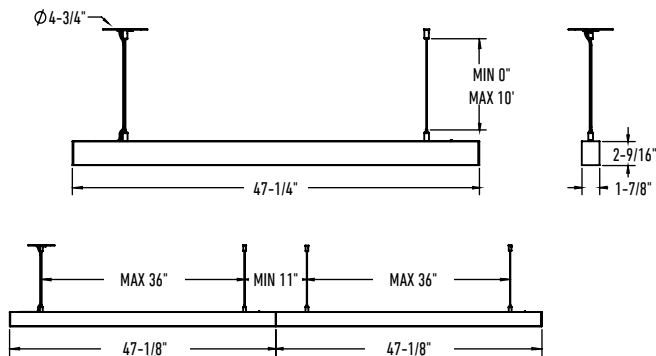

## LNFM48-CC

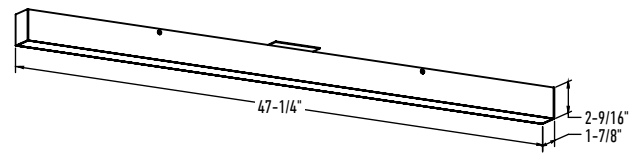


## LNWS48-CC-V

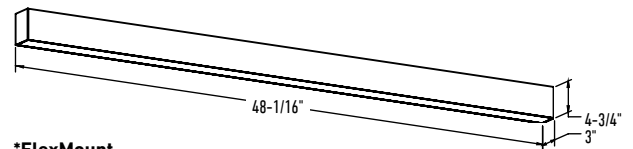

**\*FlexMount**  
LNWS48-CC allows fixture to slide left or right for precise alignment with surrounding elements. Rated for indoor and outdoor use.

## LNPDS48-ACC90-CC



### Specifications

Switch-selectable CCT  
Unique 20% up/ 80% down light output (LNPD48-CC, LNPDS48-CC, LNPDS48-ACC90-CC only)  
Multiple fixtures can be linked together  
LNFM48 can be mounted on 4" octagon junction box or directly on the ceiling  
Adjustable height up to 10 feet  
Aluminum housing which serves as a highly efficient heat sink  
Optional round plate included to conceal the junction box  
Sliding mounting bracket on LNWS48-CC wall sconce for easy adjustability  
3-position switch for light output on LNWS48-CC wall sconce (up, down, up/down)  
Full color spectrum and 2700–6500K in pure whites (DCP-LNPD48 only)  
Dimmable via the DALI Connect app and the DCP-RMCT remote (DCP-LNPD48 only)  
5-year warranty

### Finish

- **BK** Black
- **WH** White (CC models only)

### Accessories

**LNACC-L16FT**  
16-foot lens for Boulevard series pendants, flush mounts and recessed linears

**DCP-RMCT**  
Smart remote for DCP-LNPD48



**DCP-HUBV2**  
DALI Connect Pro Hub for DCP-LNPD48

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# PINPOINT

The Pinpoint series, with its glossy piano-black reflector, delivers contemporary style and functional illumination for a wide range of applications.

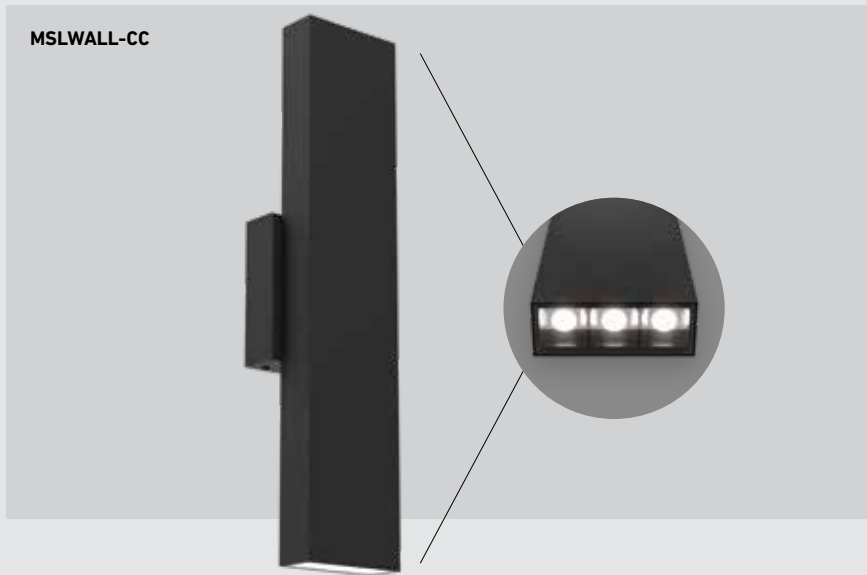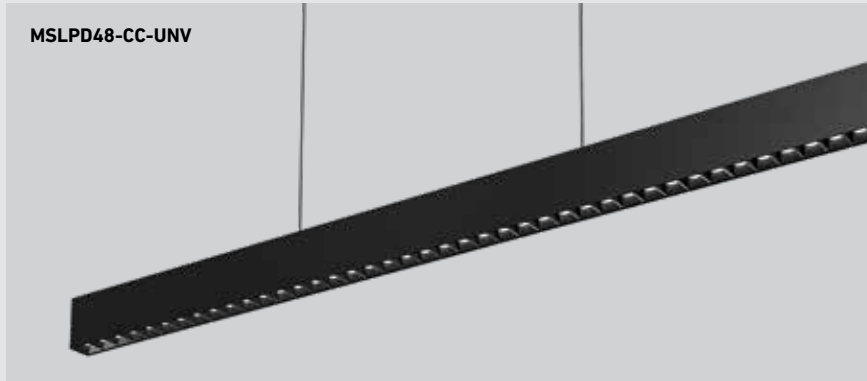

COLOR SELECT



**T24  
JA8**  
CERTIFIED\*\*



UNIVERSAL DRIVER\*\*



**ADA**  
COMPLIANT†




| Model                  | Size | Watts | Delivered lumens | CRI | Color °T                          | Voltage                          |
|------------------------|------|-------|------------------|-----|-----------------------------------|----------------------------------|
| <b>MSLPD48-CC-UNV*</b> | 48"  | 40 W  | 2700 lm          | 90  | 2700, 3000, 3500,<br>4000, 5000 K | 120 / 277 / 347V                 |
| <b>MSLPD72-CC-UNV</b>  | 72"  | 60 W  | 3200 lm          |     |                                   | Triac, ELV, and<br>0-10V dimming |
| <b>MSLWALL-CC**</b>    | 18"  | 15 W  | 760 lm           |     |                                   | 120 V                            |

\*Model MSLPD48-CC-UNV


\*\*Models MSLPD48-CC-UNV, MSLPD72-CC-UNV

†Model MSLWALL-CC


### MSLPD48-CC-UNV

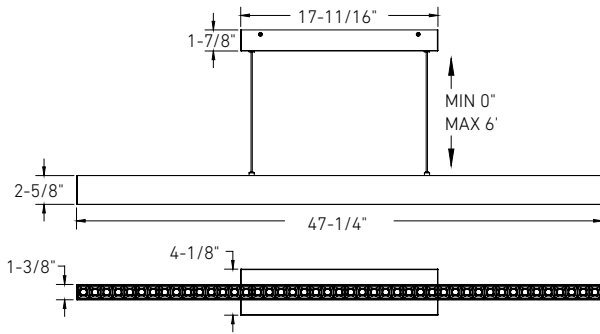

### MSLPD72-CC-UNV

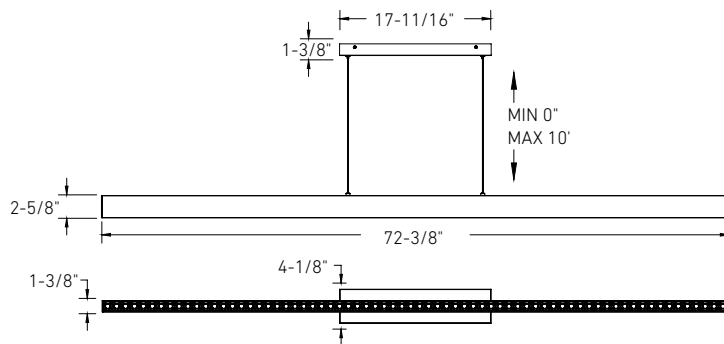

### MSLWALL-CC



#### Specifications

Universal voltage driver supports 120V, 277V, or 347V input with both TRIAC and 0–10V dimming (models MSLPD48-CC-UNV and MSLPD72-CC-UNV)

Adjustable height up to 6 feet with Gravity Glide (model MSLPD48-CC-UNV)

Adjustable height up to 10 feet (model MSLPD72-CC-UNV)

Aluminum housing

Switch-selectable CCT

30° beam angle

Integrated dimmable driver

Canopy mount on 4" octagon junction box

5-year warranty

#### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

#### More from this family



**MSL1**  
pg. 38



**MSL2**  
pg. 38



**MSL4**  
pg. 38



**MSL5**  
pg. 38



**MSL5G**  
pg. 38



**MSL10**  
pg. 38




**MSL10G**  
pg. 38

#### Finish

● **BK** Black

# BEAM


This sleek design truly utilizes the best features of LED technology. We are now able to create a unique form factor that will project the perfect amount of light.

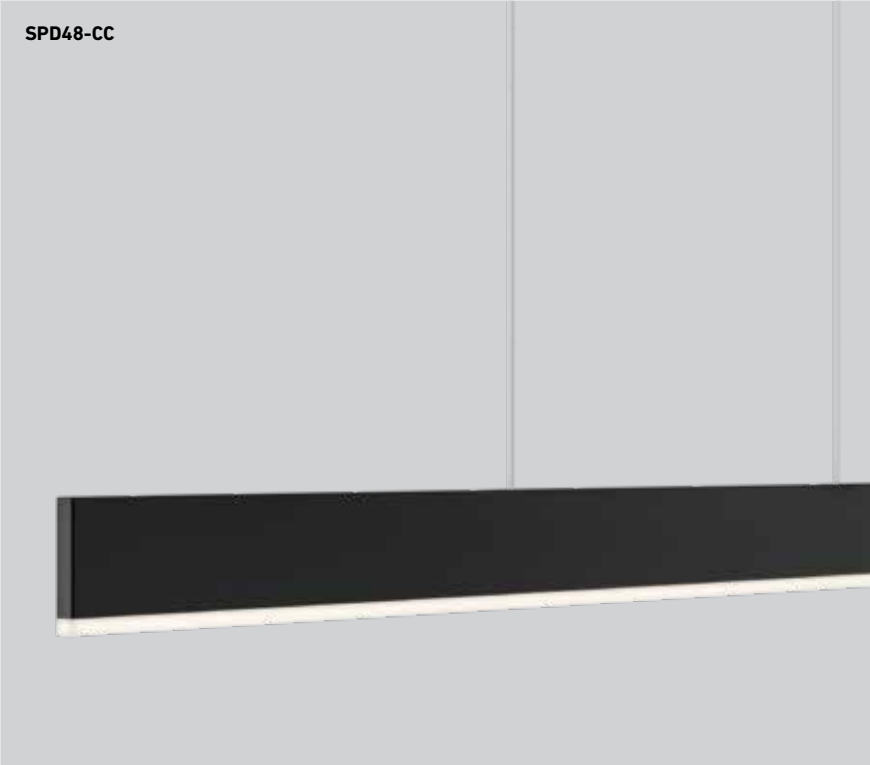


| Model    | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|----------|------|-------|------------------|-----|--------------------------------|---------|
| SPD48-CC | 48"  | 27 W  | 1530 lm          | 90  | 2700, 3000, 3500, 4000, 5000 K | 120 V   |
| SPD72-CC | 72"  | 54 W  | 2300 lm          |     |                                |         |



#### SPD48-CC

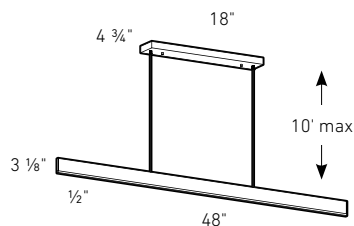

#### SPD72-CC

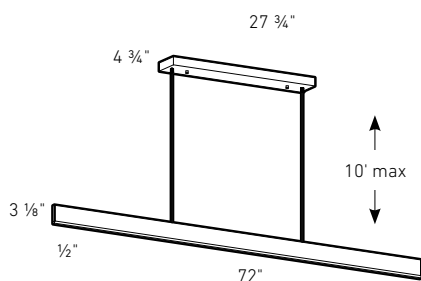

#### Specifications

Adjustable cable length up to 10 feet  
Switch-selectable CCT  
Frosted lens  
Replaceable driver  
Aluminum die-cast housing which serves as a highly efficient heat sink  
Integrated dimmable driver  
5-year warranty

#### Finish

- **BK** Black
- **WH** White

#### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

#### More from this family




**SWS24-CC**  
**SWS36-CC**  
**SWS48-CC**  
**SWS60-CC**  
pg. 188

# CURRENT

Elevate your space with this sleek luminary, meticulously crafted to blend seamlessly into contemporary interiors. Its minimalist profile, characterized by a slender silhouette and unobtrusive design, not only illuminates your surroundings with a soft and uniform glow but also serves as a striking aesthetic statement.



SLPD60-CC

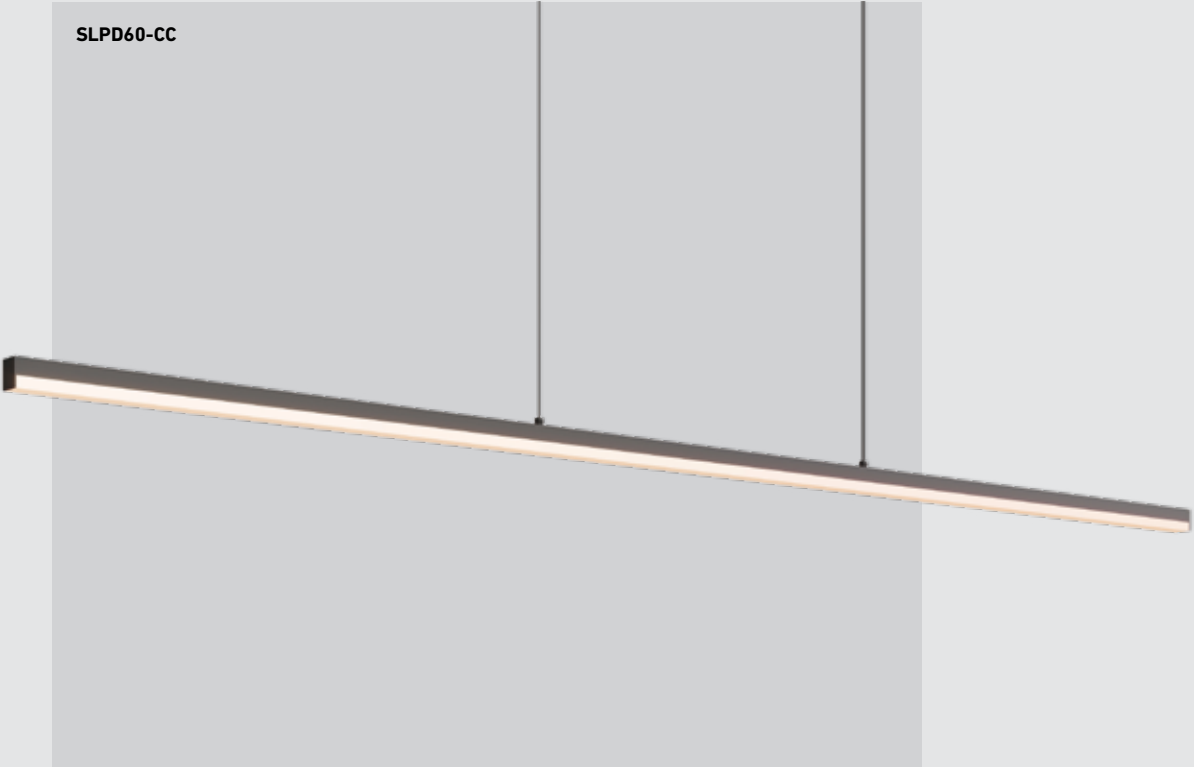

| Model     | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|-----------|------|-------|------------------|-----|--------------------------------|---------|
| SLPD60-CC | 60"  | 32 W  | 2140 lm          | 80  | 2700, 3000, 3500, 4000, 5000 K | 120 V   |



### Specifications

Adjustable height up to 10 feet  
 Switch-selectable CCT  
 Integrated dimmable driver  
 Canopy mount on 4" octagon  
 junction box  
 5-year warranty


### Finish

- **BK** Black
- **GD** Gold
- **WH** White

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

### SLPD60-CC

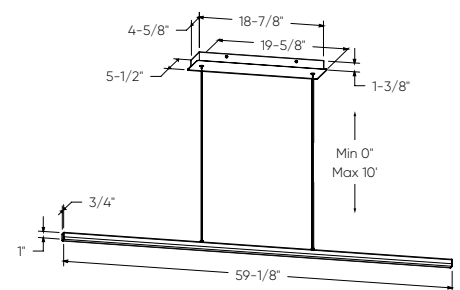


# TWIRL

This ribbon-like pendant gives you a continuous warm white flow. It will definitely be a beautiful focal point to any room.



| Model   | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|---------|------|-------|------------------|-----|--------------------------------|---------|
| TWPD-CC | 28"  | 84 W  | 3960 lm          | 80  | 2700, 3000, 3500, 4000, 5000 K | 120 V   |

## TWPD-CC

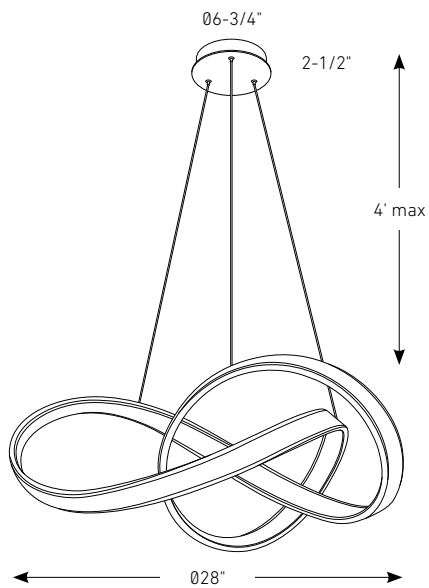

### Specifications

Adjustable height up to 4 feet  
Frosted lens  
Integrated dimmable driver  
Canopy mount on 4" octagon junction box  
5-year warranty

### Finish

● **BK** Black

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# ATOM


A unique design with clean lines that will add the final touch to your office, bedroom and even that newly renovated mud room. The double-sided ring will add warmth and character.



DAMP



FPD60-CC

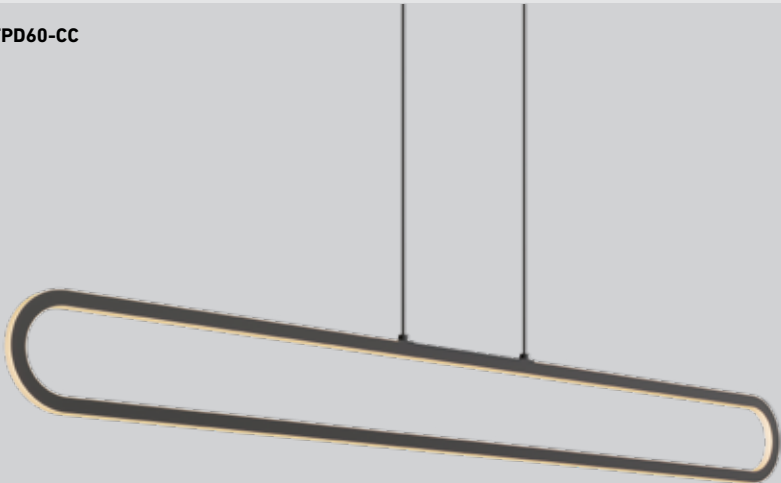


FPD-CC




| Model    | Size | Watts | Delivered lumens | CRI | Color °T          | Voltage |
|----------|------|-------|------------------|-----|-------------------|---------|
| FPD60-CC | 60"  | 50 W  | 1700 lm          | 90  | 2700, 3000, 3500, | 120 V   |
| FPD-CC   | 16"  | 24 W  | 820 lm           |     | 4000, 5000 K      |         |

### FPD60-CC

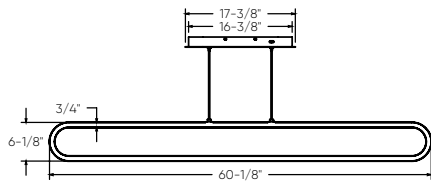

### FPD-CC

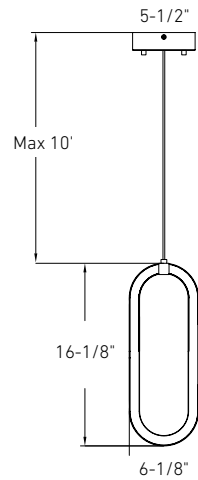

### Specifications

Pendant height adjustable up to 10 feet  
Switch-selectable CCT  
Integrated dimmable driver  
Canopy mount on 4" octagon junction box  
5-year warranty

### Finish


- **BK** Black
- **GD** Gold  
(Not available for FPD60-CC)

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# CIRCA

Illuminate your space in style with our 24-inch circular pendant, available in multiple finishes, featuring adjustable 5CCT settings for customizable illumination that seamlessly blends style and functionality.

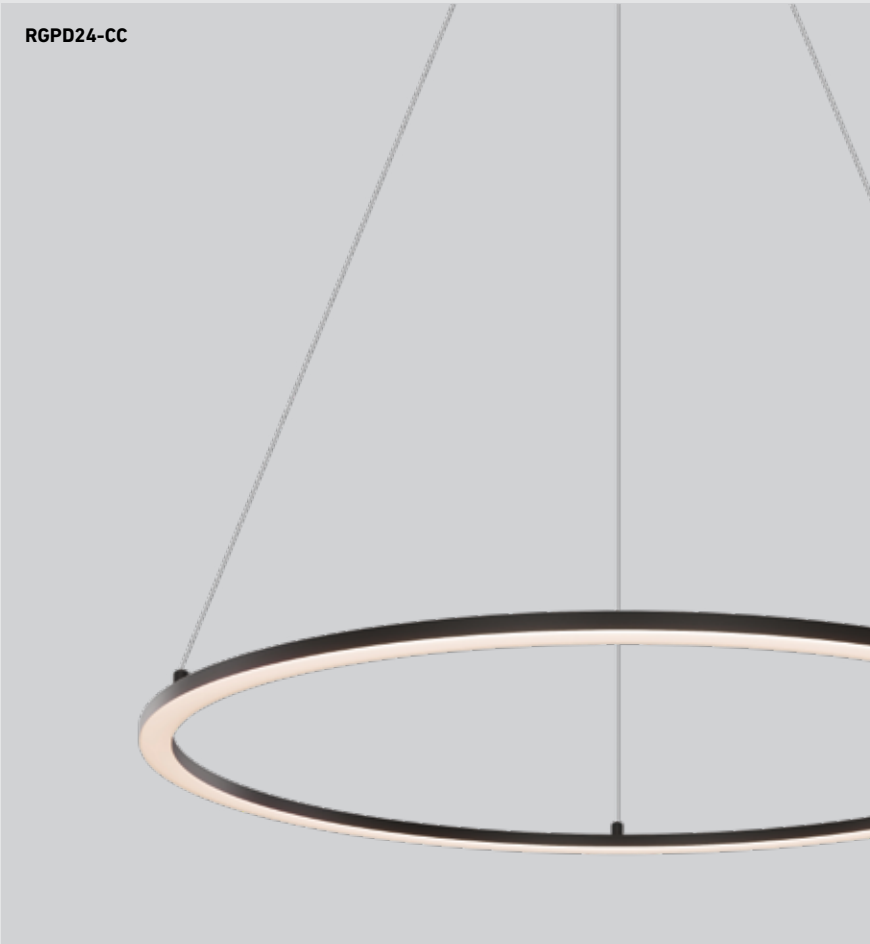


| Model     | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|-----------|------|-------|------------------|-----|--------------------------------|---------|
| RGPD24-CC | 24"  | 28 W  | 1500 lm          | 80  | 2700, 3000, 3500, 4000, 5000 K | 120 V   |





## RGPD24-CC

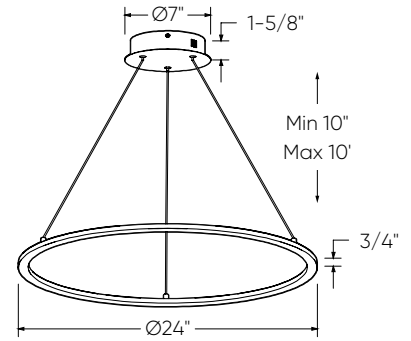

### Specifications

Adjustable height up to 10 feet  
Switch-selectable CCT  
Integrated dimmable driver  
Canopy mount on 4" octagon  
junction box  
5-year warranty

### Finish

- **BK** Black
- **GD** Gold
- **WH** White

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# PYRA

Discover contemporary elegance with these 22-inch and 34-inch rounded triangular pendant and flush mount lights, available in a variety of finishes and customizable 5CCT options.




**T24  
JA8**  
CERTIFIED




| Model     | Size | Watts | Delivered lumens | CRI | Color °T          | Voltage |
|-----------|------|-------|------------------|-----|-------------------|---------|
| TRFM22-CC | 22"  | 40 W  | 1900 lm          | 90  | 2700, 3000, 3500, | 120 V   |
| TRPD34-CC | 34"  | 80 W  | 3600 lm          |     | 4000, 5000 K      |         |

## TRPD34-CC

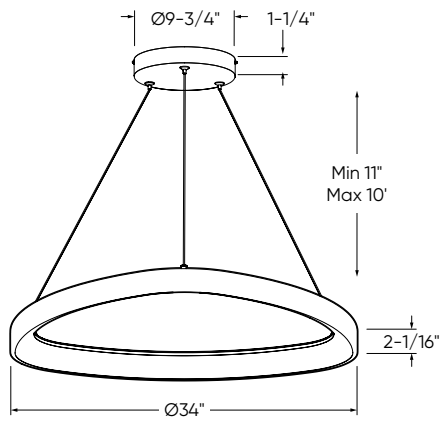

## TRFM22-CC

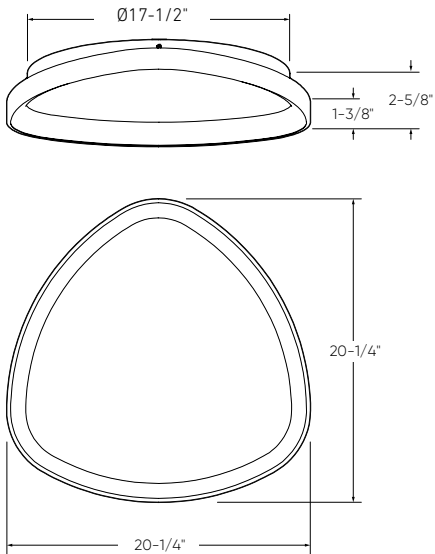

### Specifications

Pendant height adjustable up to 10 feet  
Switch-selectable CCT  
Integrated dimmable driver  
Canopy mount on 4" octagon  
junction box  
5-year warranty

### Finish

- **BK** Black
- **GD** Gold
- **WH** White

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.



# ASTERISK

Infuse sophistication into your space with our Asterisk series fixtures, seamlessly blending style and functionality to illuminate your area with modern grace.



| Model     | Size | Watts | Delivered lumens | CRI | Color °T          | Voltage |
|-----------|------|-------|------------------|-----|-------------------|---------|
| SSPD32-CC | 32"  | 30 W  | 1500 lm          | 80  | 2700, 3000, 3500, | 120 V   |
| SSFM20-CC | 20"  | 15 W  | 1060 lm          |     | 4000, 5000 K      |         |



## Specifications

Adjustable height up to 10 feet  
Switch-selectable CCT  
Integrated dimmable driver  
Includes 5 robust stems  
Canopy mount on 4" octagon junction box  
5-year warranty


## Finish

● **BK** Black




## Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

## SSPD32-CC

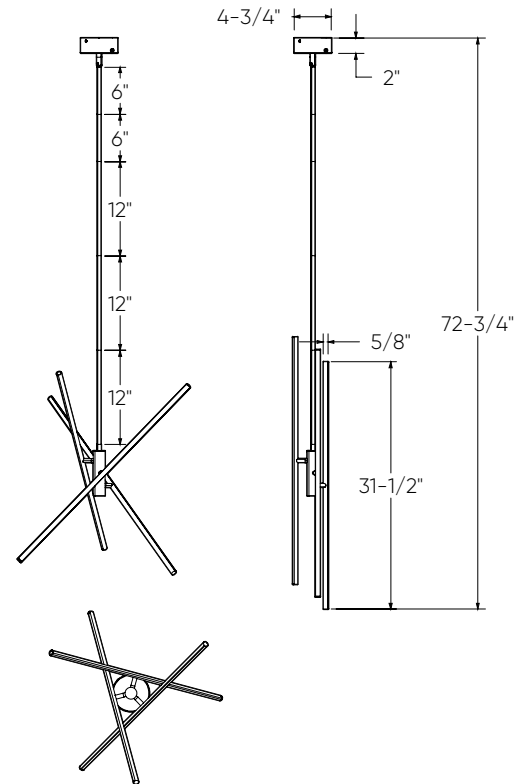


## SSFM20-CC

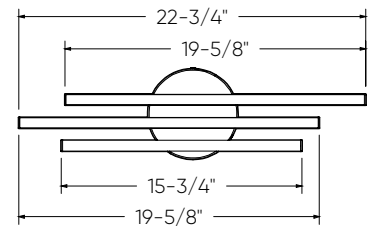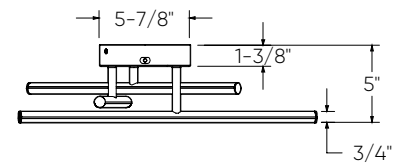

# NOVA

Designed for modern and new builds, this cylindrical hanging pendant provides a simple and elegant way to enhance your space. At 18-inches in length, and with an ultra-thin flat canopy with adjustable 10-foot cable, this fixture can be installed as easily as any recessed light. Switch-selectable color temperatures ranging from 3000, 3500, and 4000 K, to create a subtle and customizable lighting effect.

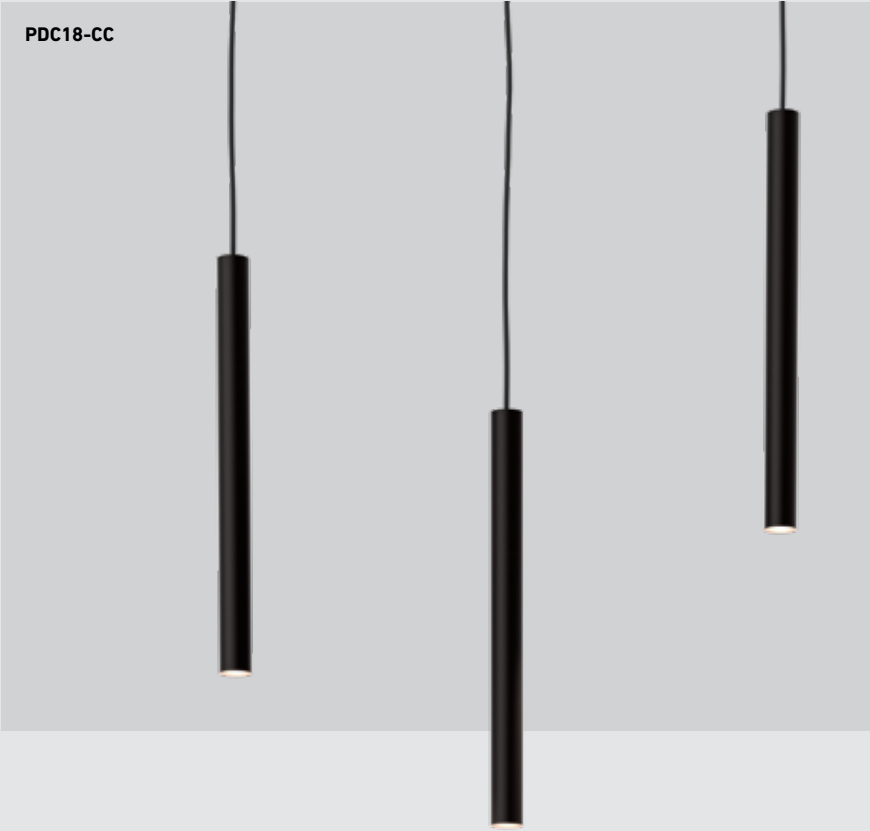


| Model    | Size | Watts | Delivered lumens | CRI | Color °T                 | Voltage |
|----------|------|-------|------------------|-----|--------------------------|---------|
| PDC18-CC | 18"  | 9 W   | 510 lm           | 90  | 3000 K - 3500 K - 4000 K | 120 V   |



## PDC18-CC

Ø3 3/8"

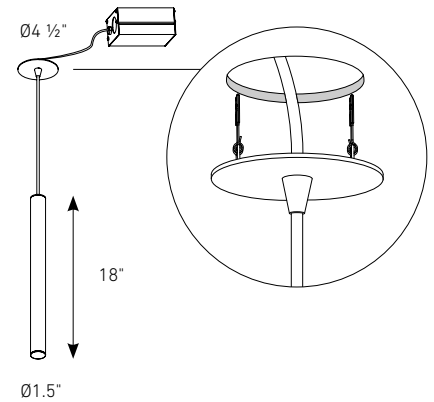

## Specifications

Adjustable cable length up to 10 feet  
Switch-selectable CCT  
Every fixture includes a junction box with integrated dimmable driver  
Replaceable driver  
Ultra-slim canopy, installs like a recessed fixture  
Frosted reflector  
5-year warranty

## Finish

- **BK** Black
- **WH** White

## Accessories

**RFP-UNI**  
Universal rough-in plate

## Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# FOCUS

The Focus modern LED cylinder flush mounts are available in two sizes, 5-inch and 6-inch, with the larger size featuring a multi-voltage driver for added versatility.



**T24  
JA8**  
CERTIFIED




| Model      | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage                              |
|------------|------|-------|------------------|-----|--------------------------------|--------------------------------------|
| CYL05-CC   | 5"   | 20 W  | 1000 lm          | 90  | 2700, 3000, 3500, 4000, 5000 K | 120 V                                |
| CYL06-CC-V | 6"   | 26 W  | 1500 lm          | 90  | 2700, 3000, 3500, 4000, 5000 K | V: 120 / 277 / 347V<br>0-10V dimming |






#### CYL05-CC



#### CYL06-CC-V



#### Specifications

Every fixture includes a junction box with an integrated driver

3 optical options: clear, frosted and honeycomb included

35° beam angle for CYL05-CC

45° beam angle for CYL06-CC-V

Replaceable driver

Aluminum construction

Switch-selectable CCT

5-year warranty

#### Finish

● **BK** Black

○ **WH** White

#### Accessories

##### CYL05-TRIM-XX

Internal trim for 5" cylinder available in Alzak, Black, Gold, or White finishes

##### CYL06-TRIM-XX

Internal trim for 6" cylinder available in Alzak, Black, Gold, or White finishes

#### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

NEW

# AURORA

This LED flush mount delivers full illumination when needed and gently shifts to a soft halo when dimmed, providing subtle guidance and ambiance during nighttime hours.

CFH12-CC



COLOR SELECT



DRY




NIGHT GLOW




| Model    | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|----------|------|-------|------------------|-----|--------------------------------|---------|
| CFH12-CC | 12"  | 27 W  | 1725 lm          | 90  | 2700, 3000, 3500, 4000, 5000 K | 120 V   |
| CFH21-CC | 21"  | 50 W  | 2880 lm          |     |                                |         |



#### CFH12-CC



#### CFH21-CC



#### Specifications

Dual control functionality: Adjust the CCT of the main light and backlight independently  
 General lighting zone turns off in the lower dimming range, back lighting stays on  
 Frosted lens  
 Edge-lit technology  
 Die-cast aluminum housing  
 Canopy mount on 4" octagon junction box  
 5-year warranty

#### Finish

- **BK** Black
- **WH** White

#### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# ORA

A beautiful round glass flush mount that offers more than the eye can see. With five color temperatures to choose from, this is as versatile as can be. From hallways to bedrooms and bathrooms to basements. It will add flair to any room.

CFG13-CC



COLOR SELECT



DAMP




Intertek



| Model    | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|----------|------|-------|------------------|-----|--------------------------------|---------|
| CFG13-CC | 13"  | 32 W  | 1800 lm          | 90  | 2700, 3000, 3500, 4000, 5000 K | 120 V   |



## CFG13-CC

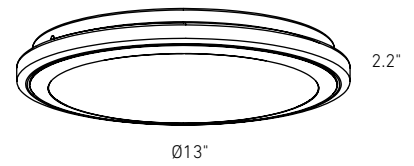

### Specifications

Integrated dimmable driver  
Frosted glass lens  
Die-cast aluminum housing  
Switch-selectable CCT  
Canopy mount on 4" octagonal junction box  
5-year warranty

### Finish

- **BK** Black
- **GD** Gold
- **SN** Satin Nickel

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# FUSION

The Fusion trimless 12- and 21-inch flush mount family showcase a harmonious union of minimalist design and expansive illumination, providing a blend of sophistication and functionality for contemporary spaces.




TLFM12-CC




| Model     | Size | Watts | Delivered lumens | CRI | Color °T          | Voltage |
|-----------|------|-------|------------------|-----|-------------------|---------|
| TLFM12-CC | 12"  | 25 W  | 2000 lm          | 90  | 2700, 3000, 3500, | 120 V   |
| TLFM21-CC | 21"  | 45 W  | 4300 lm          |     | 4000, 5000 K      |         |

---

**TLFM12-CC**

---

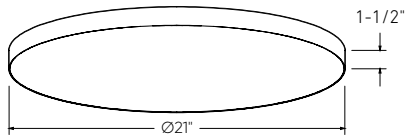**TLFM21-CC**

---

**Specifications**

Switch-selectable CCT  
Integrated dimmable driver  
Canopy mount on 4" octagon  
junction box  
5-year warranty

---

**Finish**

- **BK** Black
- **WH** White

---

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

---

# DELTA

Our LED flush mounts incorporate edge-lit technology, eliminating hot spots and glare. With 5 sizes to choose from, every application is covered.

**CFLEDR18-CC**



**CFLEDR06-CC**



**CFLEDR10-CC**



**CFLEDR24-CC**



**CFLEDR14-CC**








COLOR SELECT




**T24  
JA8**  
CERTIFIED


**CFLEDSQ06-CC**



**CFLEDSQ10-CC**

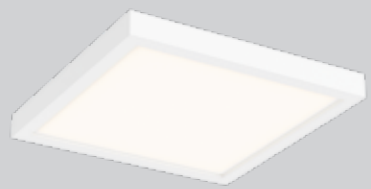

**CFLEDSQ14-CC**

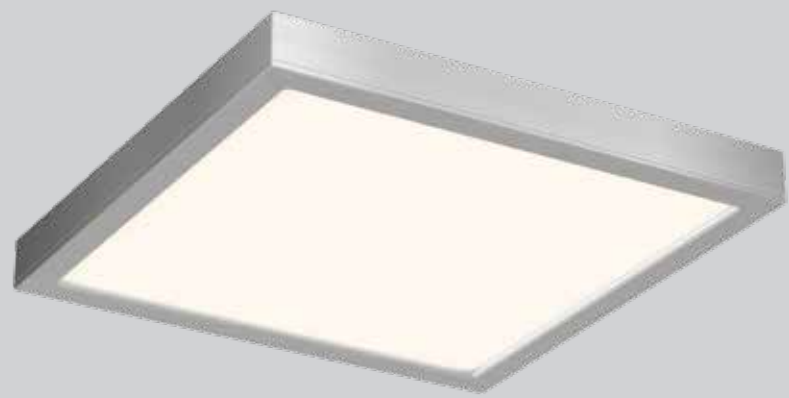

# DELTA

Our LED flush mounts incorporate edge-lit technology, eliminating hot spots and glare. With 5 sizes to choose from, every application is covered.



COLOR SELECT



WET




**T24  
JA8**  
CERTIFIED


| Model                | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage options ⚡                                                              |
|----------------------|------|-------|------------------|-----|--------------------------------|--------------------------------------------------------------------------------|
| <b>CFLEDR06-CC</b>   | 6"   | 11 W  | 700 lm           | 90  | 2700, 3000, 3500, 4000, 5000 K | <b>120 V</b><br><b>TRIAC dimming</b>                                           |
| <b>CFLEDSQ06-CC*</b> | 6"   | 11 W  | 700 lm           |     |                                |                                                                                |
| <b>CFLEDR10-CC</b>   | 10"  | 17 W  | 1200 lm          |     |                                | or                                                                             |
| <b>CFLEDSQ10-CC*</b> | 10"  | 17 W  | 1200 lm          |     |                                | <b>V: 120 / 277 / 347V</b><br><b>0-10V dimming</b><br>(Check for availability) |
| <b>CFLEDR14-CC</b>   | 14"  | 26 W  | 1700 lm          |     |                                |                                                                                |
| <b>CFLEDSQ14-CC*</b> | 14"  | 26 W  | 1700 lm          |     |                                |                                                                                |
| <b>CFLEDR18-CC</b>   | 18"  | 30 W  | 2100 lm          |     |                                |                                                                                |
| <b>CFLEDR24-CC</b>   | 24"  | 40 W  | 3000 lm          |     |                                |                                                                                |

\*Not available in multi-voltage


---

**CFLEDR06-CC**


---

**CFLEDR10-CC**


---

**CFLEDR14-CC**


---

**CFLEDR18-CC**


---

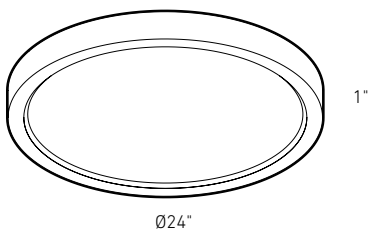**CFLEDR24-CC**


---

**CFLEDSQ06-CC**

---

**CFLEDSQ10-CC**

---

**CFLEDSQ14-CC**

---

**Specifications**

Integrated dimmable driver  
Smooth 360° wide spread  
Minimal heat emission  
Frosted lens  
Edge-lit technology  
Cast aluminum construction  
Suitable for outdoor locations  
on covered ceilings only  
5-year warranty

---

**Finish**

-  **BK** Black
-  **GD** Gold  
(6, 10, 14" round models)
-  **SN** Satin Nickel  
(6, 10, 14" round and square models)
-  **WH** White

---

**Multi-voltage (V) ⚡**

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

---

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# RADIANCE


The Radiance family features a seamless fusion of refined metal craftsmanship, offering a sophisticated and understated focal point that smoothly integrates into any interior decor.




| Model     | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|-----------|------|-------|------------------|-----|--------------------------------|---------|
| FMM09-CC  | 9"   | 14 W  | 1100 lm          | 80  | 2700, 3000, 3500, 4000, 5000 K | 120 V   |
| FMM12-CC  | 12"  | 20 W  | 1800 lm          |     |                                |         |
| DCP-FMM12 | 12"  | 21 W  | 1300 lm          | 90  | RGB + 2700 K - 6500 K          | 120 V   |

<sup>†</sup>DCP-FMM12 only

#### FMM09-CC



#### FMM12-CC, DCP-FMM12

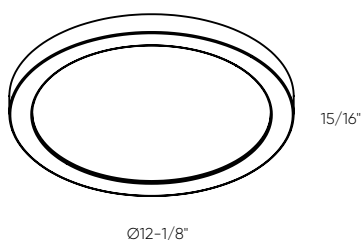

#### Specifications

Switch-selectable CCT  
Integrated dimmable driver  
Suitable for outdoor locations  
on covered ceilings only  
Canopy mount on 4" octagon  
junction box  
Full color spectrum and 2700–6500K in  
pure whites (DCP-FMM12 only)  
Dimmable via the DALI Connect app and  
the DCP-RMCT remote (DCP-FMM12 only)  
5-year warranty

#### Finish

- **BK** Black
- **SN** Satin Nickel (CC models only)
- **WH** White

#### Accessories


- DCP-RMCT**  
Smart remote for DCP-FMM12 only
- DCP-HUBV2**  
DALI Connect Pro Hub for DCP-FMM12 only

#### Note

Other color temperatures, finishes, and  
voltage options are available but may require  
minimum order quantities (MOQs) and  
longer lead times. Please contact your DALI  
representative for more information.

# PRIME

These 5-, 9-, and 12-inch flush mount fixtures form a versatile trio, each exuding contemporary design and providing practical illumination. The 5-inch model boasts a variant equipped with a motion sensor, adding a touch of modern convenience to your lighting experience.

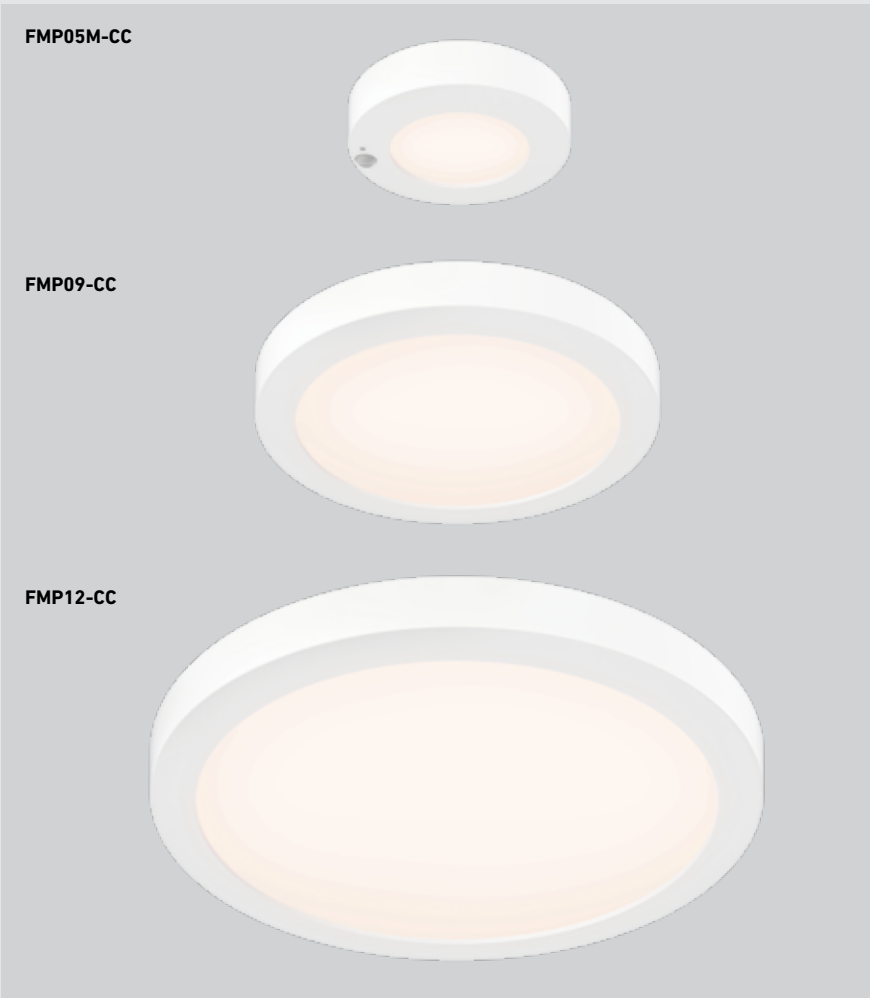

COLOR SELECT



DAMP



WET\*\*



MOTION SENSOR\*




COASTAL RATED\*\*




| Model         | Size | Watts | Delivered lumens | CRI | Color °T                                                                                                                                                                                                     | Voltage |
|---------------|------|-------|------------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| FMP05-CC      | 5"   | 9 W   | 600 lm           | 80  | 2700, 3000, 3500, 4000, 5000 K                                                                                                                                                                               | 120 V   |
| FMP05M-CC*    | 5"   | 9 W   | 600 lm           | 80  |                                                                                                                                                                                                              |         |
| FMP05-CC-CR** | 5"   | 9 W   | 470 lm           | 90  |                                                                                                                                                                                                              |         |
| FMP09-CC      | 9"   | 14 W  | 1110 lm          | 80  | *Model FMP05M-CC only, non dimmable.<br>**Models FMP05-CC-CR, FMP09-CC-CR, FMP12-CC-CR only, designed to withstand salty air. 480h salt spray test approved. Equivalent to 6.5 years in coastal environment. |         |
| FMP09-CC-CR** | 9"   | 14 W  | 960 lm           | 90  |                                                                                                                                                                                                              |         |
| FMP12-CC      | 12"  | 20 W  | 1800 lm          | 80  |                                                                                                                                                                                                              |         |
| FMP12-CC-CR** | 12   | 20 W  | 1530 lm          | 90  |                                                                                                                                                                                                              |         |


---

**FMP05-CC, FMP05-CC-CR, FMP05M-CC**

---

**FMP09-CC, FMP09-CC-CR**

---

**FMP12-CC, FMP12-CC-CR**

---

**Specifications**

Switch-selectable CCT  
Integrated dimmable driver (models FMP05, FMP09, FMP12-CC only)  
Motion sensor (model FMP05M-CC only)  
Designed to withstand salty air (models FMP05-CC-CR, FMP09-CC-CR, FMP12-CC-CR only)  
5-year warranty

---

**Finish**

○ **WH** White

---

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

NEW

# SHIFT

A sleek, high-quality LED profile luminaire with direct light output, crafted from durable aluminum extrusion. Its oblong linear head features an efficient 90° swiveling design for versatile lighting.



COLOR SELECT



DAMP



SWIVEL/DIRECTIONAL



FLEXMOUNT




REPLACEABLE DRIVER



Intertek

VA032-CC

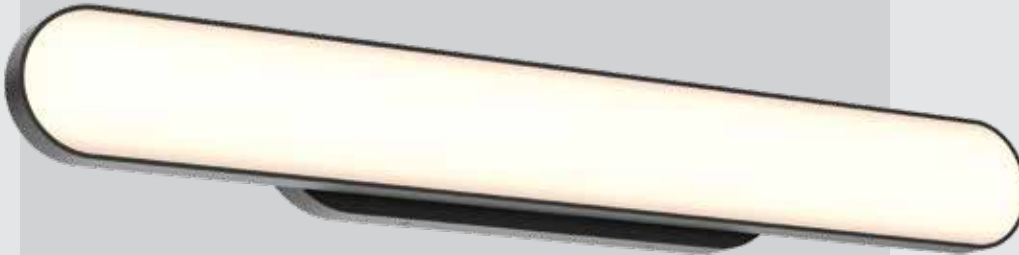


VA024-CC





## FlexMount

The fixture can be offset from the electrical box by up to 5-1/2 inches to the left or right, making it easy to align with existing elements such as a sink or mirror.

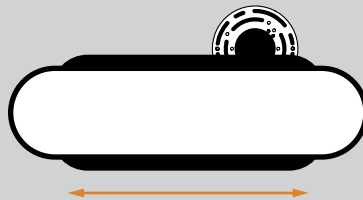

| Model    | Size | Watts | Delivered lumens | CRI | Color °T          | Voltage |
|----------|------|-------|------------------|-----|-------------------|---------|
| VA024-CC | 24"  | 31 W  | 2470 lm          | 90  | 2700, 3000, 3500, | 120 V   |
| VA032-CC | 32"  | 34 W  | 2680 lm          |     | 4000, 5000 K      |         |

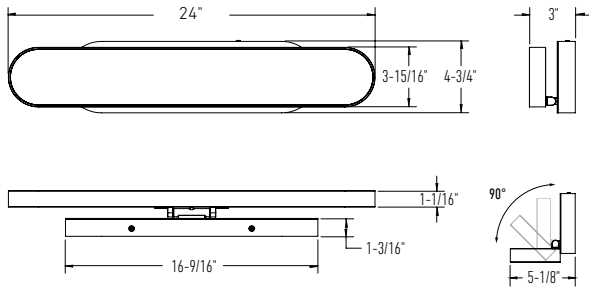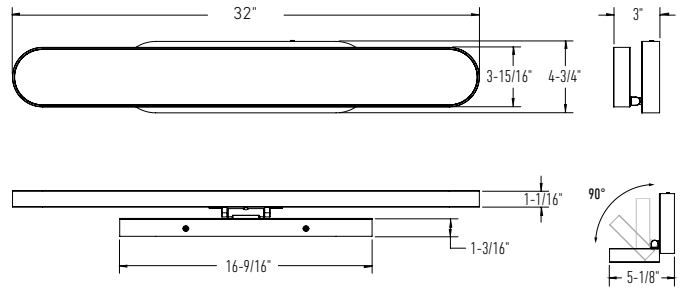

**VA024-CC****VA032-CC****Specifications**

Switch-selectable CCT  
 90 degree swivel  
 Sliding mounting bracket for easy adjustability  
 Integrated dimmable driver  
 Replaceable driver  
 Canopy mount on 4" octagon junction box  
 5-year warranty

**Finish**

● **BK** Black  
 ● **GD** Gold  
 ○ **WH** White

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.


# LEDGE

A sleek, high-quality LED vanity light with direct illumination, made from sturdy aluminum. Its streamlined linear design provides even, versatile lighting, perfect for modern spaces. Available in two sizes and multiple finishes.




| Model    | Size | Watts | Delivered lumens | CRI | Color °T          | Voltage |
|----------|------|-------|------------------|-----|-------------------|---------|
| VAL24-CC | 24"  | 30 W  | 2200 lm          | 90  | 2700, 3000, 3500, | 120 V   |
| VAL36-CC | 36"  | 32 W  | 2330 lm          |     | 4000, 5000 K      |         |

#### VAL24-CC

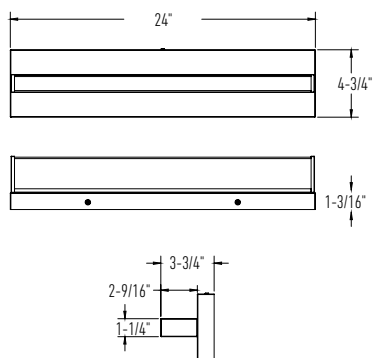

#### VAL36-CC

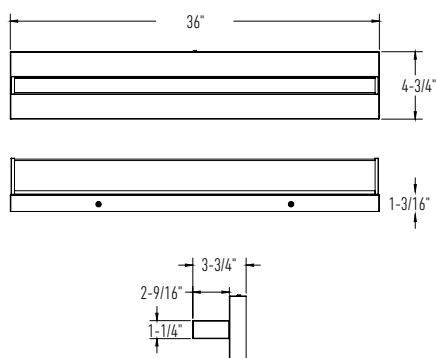

#### Specifications

Switch-selectable CCT  
Sliding mounting bracket for easy adjustability  
Integrated dimmable driver  
Replaceable driver  
Canopy mount on 4" octagon junction box  
5-year warranty

#### Finish

- BK** Black
- CH** Chrome
- SN** Satin Nickel

#### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.


# ARIA

A modern, high-quality LED profile luminaire with direct light emission. Made of an aluminum extrusion and comes with an efficient 120° swiveling linear head.




| Model    | Size | Watts | Delivered lumens | CRI | Color °T          | Voltage |
|----------|------|-------|------------------|-----|-------------------|---------|
| VSW24-CC | 24"  | 40 W  | 1280 lm          | 90  | 2700, 3000, 3500, | 120 V   |
| VSW36-CC | 36"  | 40 W  | 1500 lm          |     | 4000, 5000 K      |         |

## VSW24-CC

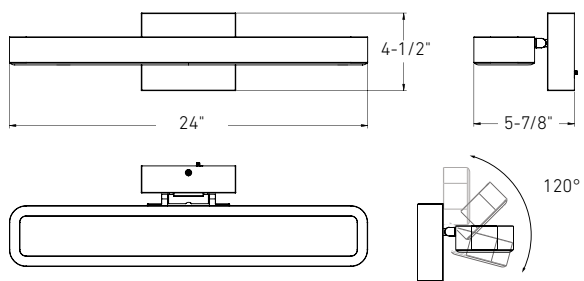

## VSW36-CC

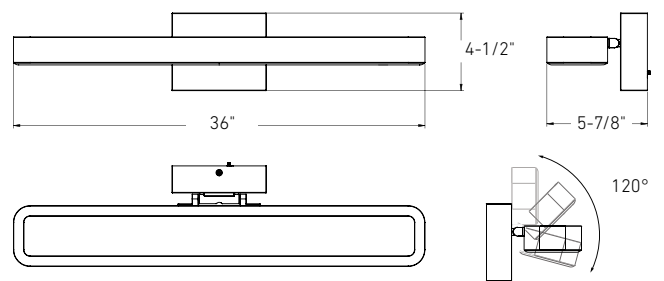

### Specifications

Superior color consistency  
Integrated dimmable driver  
Switch-selectable CCT  
Minimal heat emission  
Aluminum construction  
120 degree swivel  
5-year warranty

### Finish

- **BK** Black
- **SN** Satin Nickel (VSW24-CC only)

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.


# LYRA

These modern LED vanity lights can be installed in 2 directions; horizontal or vertical based on your desired lighting layout. Let your imagination go.




**ADA**  
COMPLIANT

**T24  
JA8**  
CERTIFIED

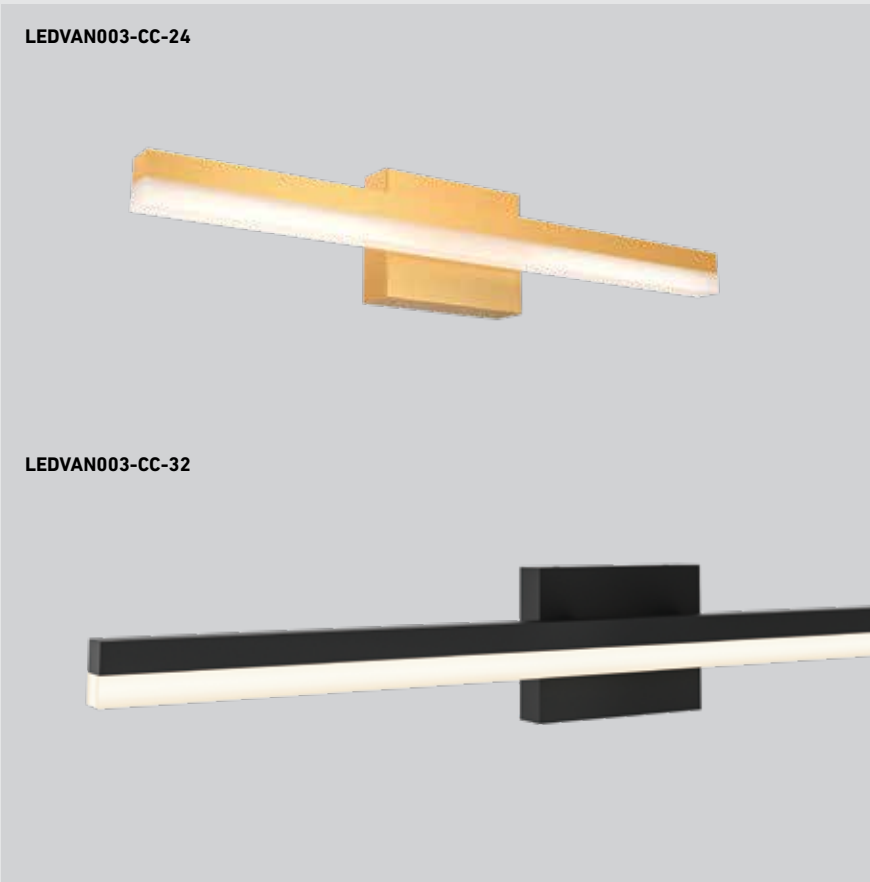


| Model           | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|-----------------|------|-------|------------------|-----|--------------------------------|---------|
| LEDVAN003-CC-24 | 24"  | 23 W  | 1900 lm          | 90  | 2700, 3000, 3500, 4000, 5000 K | 120 V   |
| LEDVAN003-CC-32 | 32"  | 38 W  | 2800 lm          |     |                                |         |

#### LEDVAN003-CC-24

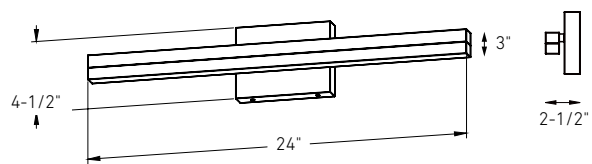

#### LEDVAN003-CC-32

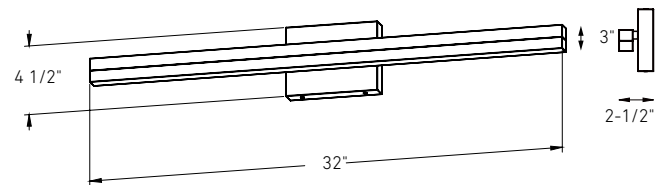

#### Specifications

Switch-selectable CCT  
Superior color consistency  
Integrated dimmable driver  
5-year warranty

#### Finish

- BK** Black
- CH** Chrome
- GD** Gold
- SN** Satin Nickel
- WH** White

#### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.

# PORTRAIT

Upgrade your living space with our versatile directional vanity light, suitable for any room. This fixture allows you to point the light in any direction, providing both functionality and style for a modern touch.




COLOR SELECT



DAMP




SWIVEL/DIRECTIONAL

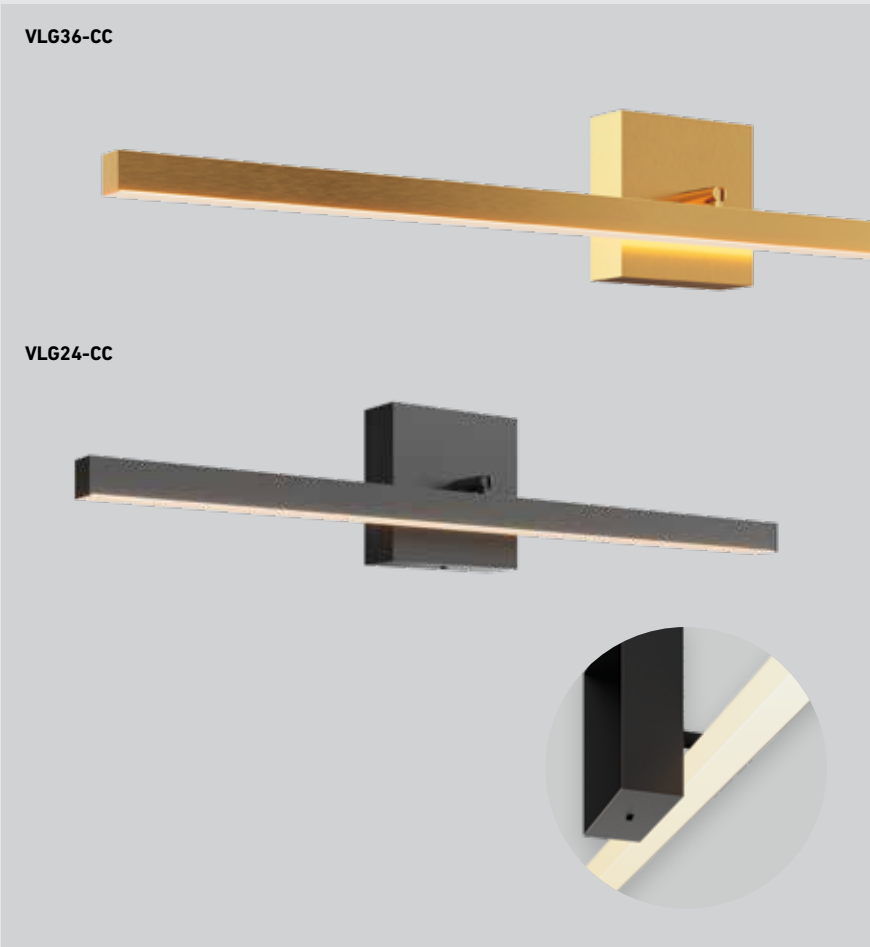


| Model    | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|----------|------|-------|------------------|-----|--------------------------------|---------|
| VLG24-CC | 24"  | 16 W  | 1100 lm          | 80  | 2700, 3000, 3500, 4000, 5000 K | 120 V   |
| VLG36-CC | 36"  | 26 W  | 1400 lm          |     |                                |         |



#### VLG24-CC

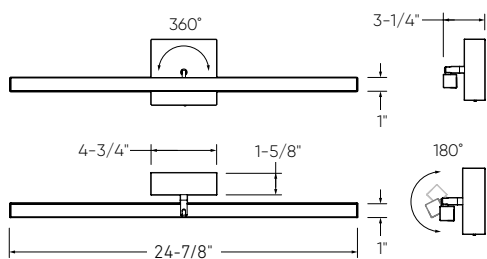

#### VLG36-CC

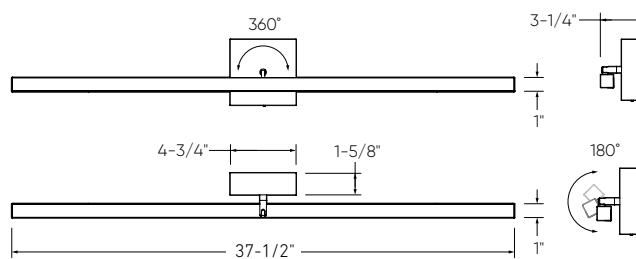

#### Specifications

Switch-selectable CCT  
Integrated dimmable driver  
360° rotation, 180° swivel  
Multi-directional lighting with light coming from below and behind the luminaire  
Canopy mount on 4" octagon junction box  
5-year warranty

#### Finish


- **BK** Black
- **GD** Gold
- **SN** Satin Nickel
- **WH** White

#### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# NOBLE

The flexibility of our LED vanity will give you many options to work with. It can be installed in a horizontal or vertical direction, and is available in 3 finishes.

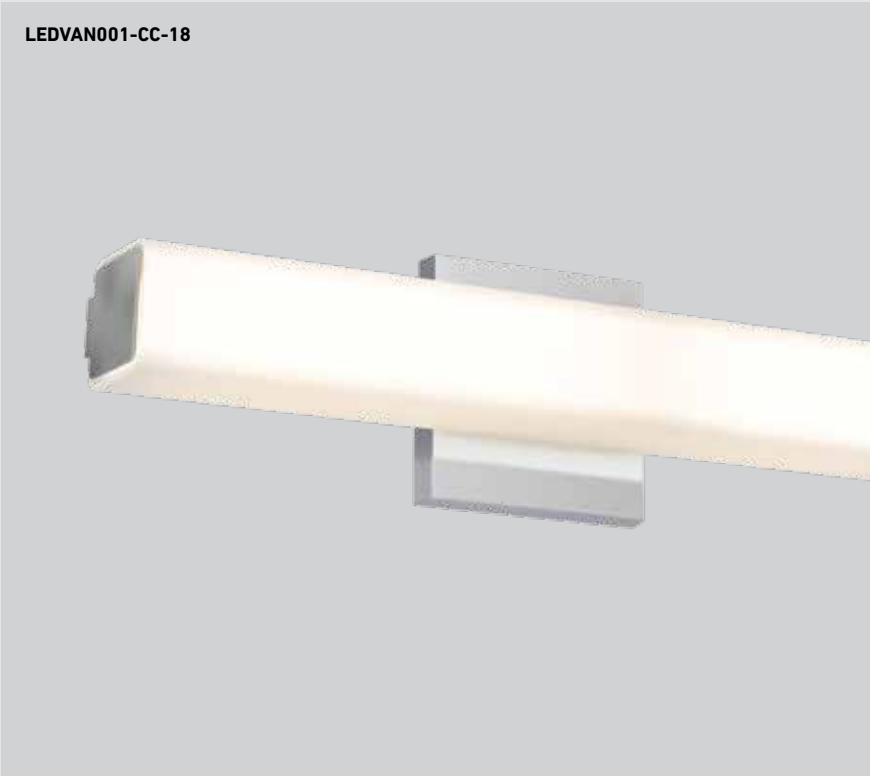


**ADA**  
COMPLIANT




| Model           | Size | Watts | Delivered lumens | CRI | Color °T          | Voltage |
|-----------------|------|-------|------------------|-----|-------------------|---------|
| LEDVAN001-CC-18 | 18"  | 16 W  | 1000 lm          | 90  | 2700, 3000, 3500, | 120 V   |
| LEDVAN001-CC-24 | 24"  | 24 W  | 1600 lm          |     | 4000, 5000 K      |         |



#### LEDVAN001-CC-18



#### LEDVAN001-CC-24

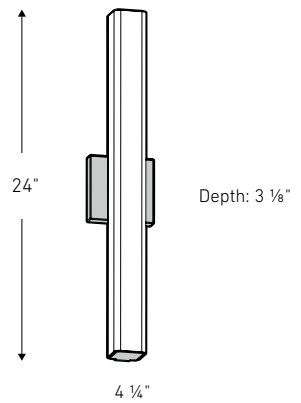

#### Specifications

Switch-selectable CCT:  
Square frosted glass lens  
Superior color consistency  
Integrated dimmable direct-AC  
LED technology  
5-year warranty

#### Finish

- BK** Black
- CH** Chrome
- SN** Satin Nickel

#### Note


Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.

# BALANCE

Transform your bathroom ambiance with our 24 and 36-inch two-tone vanity light, featuring a stylish interplay of finishes, and complete with an elegant round canopy for a minimalist touch.




VCC36-CC

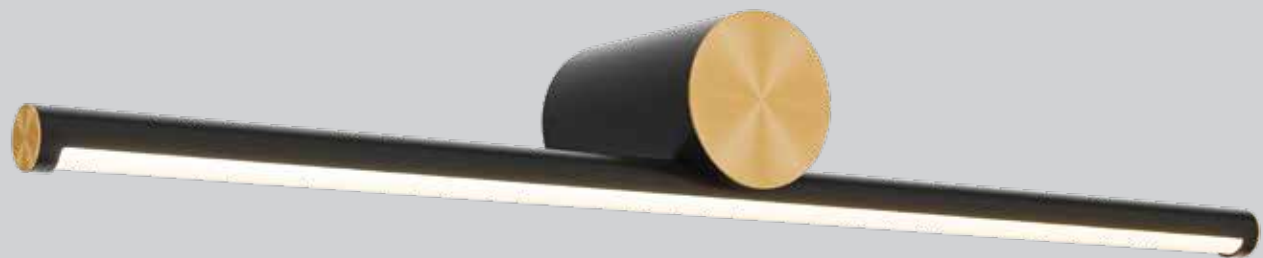


| Model    | Size | Watts | Delivered lumens | CRI | Color °T          | Voltage |
|----------|------|-------|------------------|-----|-------------------|---------|
| VCC24-CC | 24"  | 20 W  | 1490 lm          | 90  | 2700, 3000, 3500, | 120 V   |
| VCC36-CC | 36"  | 30 W  | 1950 lm          |     | 4000, 5000 K      |         |

### VCC24-CC

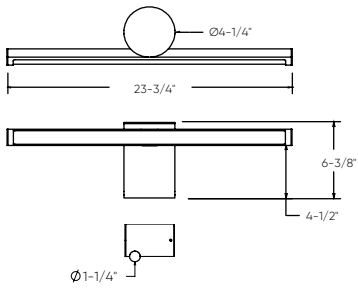

### VCC36-CC

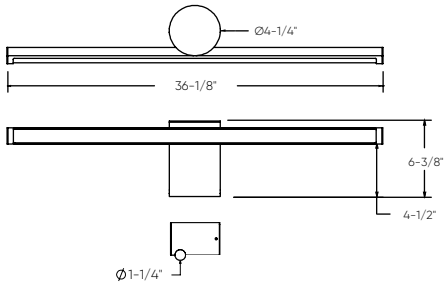

### Specifications

Switch-selectable CCT  
Integrated dimmable driver  
Canopy mount on 4" octagon  
junction box  
5-1/4" decorative disc included  
5-year warranty

### Finish

 **BG** Black/Gold

### Note


Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

NEW

# VELA

The flexibility of our LED vanity will give you many options to work with. It can be installed in a horizontal or vertical direction, and is available in 2 finishes.

**VAN002-CC-22**

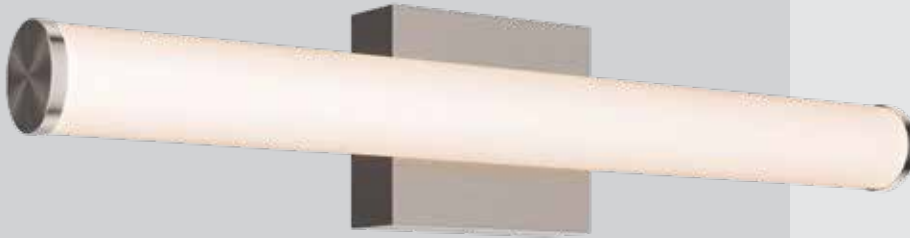

COLOR SELECT



MULTI-WATTAGE



DAMP

**ADA**  
COMPLIANT



REPLACEABLE DRIVER


**T24  
JA8**  
CERTIFIED




| Model               | Size | Watts        | Delivered lumens | CRI | Color °T          | Voltage                      |
|---------------------|------|--------------|------------------|-----|-------------------|------------------------------|
| <b>VAN002-CC-22</b> | 22"  | 9, 15, 19 W  | 1700 lm          | 90  | 2700, 3000, 3500, | 120 / 277V                   |
| <b>VAN002-CC-46</b> | 46"  | 22, 29, 36 W | 3200 lm          |     | 4000, 5000 K      | Triac, ELV and 0-10V dimming |



#### VAN002-CC-22

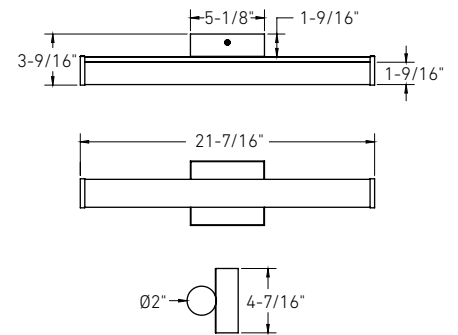

#### VAN002-CC-46

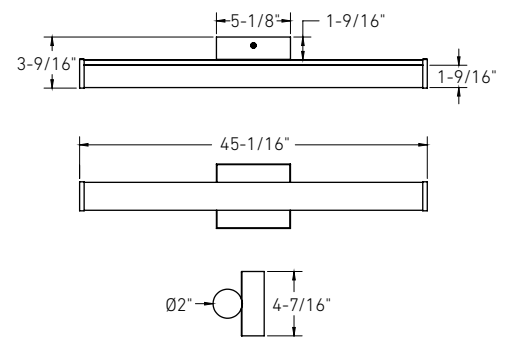

#### Specifications

Switch-selectable CCT  
 Frosted lens  
 Multi-watt output allows you to choose from three wattage settings for customizable brightness directly on the canopy  
 Superior color consistency  
 Replaceable driver  
 0-10V, Triac, ELV dimming  
 5-year warranty

#### Finish

● **BK** Black  
 ● **SN** Satin Nickel

#### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.

NEW

# PILLAR

Completing the Pillar family, the 24" wall-mounted version extends Pillar's design language outdoors. Sharing the same sculptural aesthetic, this model is built for exterior environments while remaining suitable for indoor installation.

PILW24-CC-UNV



## Selectable Light Direction

Easily choose between up light, down light, or both with a built-in switch.



COLOR SELECT



WET

**T24  
JA8**  
CERTIFIED



UNIVERSAL DRIVER



REPLACEABLE DRIVER



SELECTABLE LIGHT DIRECTION




| Model         | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage ⚡                                         |
|---------------|------|-------|------------------|-----|--------------------------------|---------------------------------------------------|
| PILW24-CC-UNV | 24"  | 57 W  | 3500 lm          | 90  | 2200, 2700, 3000, 3500, 4000 K | 120 / 277 / 347V<br>Triac, ELV, and 0-10V dimming |





PILW24-CC-UNV

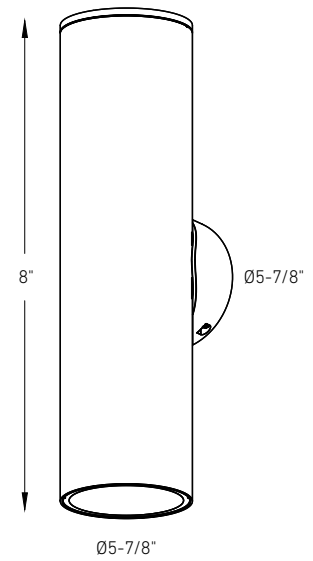

### Specifications

Switch-selectable CCT  
 36° beam angle  
 Replaceable driver  
 Universal voltage: 120V, 277V, or 347V input  
 with TRIAC, ELV, and 0–10V dimming  
 Mounts on a 4" octagon junction box  
 Selectable Light Direction. Easily choose  
 between up light, down light, or both with a  
 built-in switch  
 5-year warranty

### Finish

● **BK** Black

### Note

Other color temperatures, finishes, and  
 voltage options are available but may require  
 minimum order quantities (MOQs) and  
 longer lead times. Please contact your DALI  
 representative for more information.







# ADEN

A classic cylindrical design paired with 5CCT flexibility and rugged, weather-resistant construction, built to perform and endure in any outdoor setting.



UPGRADE



COLOR SELECT



WET

**T24  
JA8**  
CERTIFIED




UNIVERSAL DRIVER



| Model      | Size    | Watts | Delivered lumens | CRI | Color °T                         | Voltage                              |
|------------|---------|-------|------------------|-----|----------------------------------|--------------------------------------|
| LWA12-CC   | 11-3/4" | 30 W  | 2000 lm          | 90  | 2200, 2700, 3000<br>3500, 4000 K | 120 V<br>Triac dimming               |
| LWA12-CC-V | 11-3/4" | 30 W  | 2100 lm          | 90  | 2200, 2700, 3000<br>3500, 4000 K | V: 120 / 277 / 347V<br>0-10V dimming |



## LWA12-CC

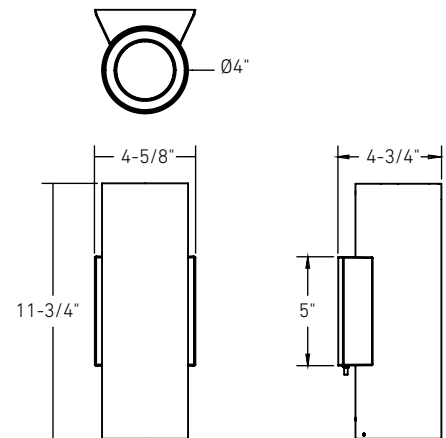

### Specifications

Made of extruded aluminum  
Switch-selectable CCT  
Integrated dimmable driver  
Aluminum end cap for unidirectional lighting included  
5-year warranty

### Finish

● **BK** Black

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# BROOKLYN

With its clean rectangular silhouette, this fixture blends classic style, 5CCT versatility, and durable construction to withstand the elements year-round.

LWB12-CC



## CCT Button

Easily select from multiple color temperature options.



COLOR SELECT



WET

**T24  
JA8**  
CERTIFIED




UNIVERSAL DRIVER



| Model      | Size    | Watts | Delivered lumens | CRI | Color °T                         | Voltage                              |
|------------|---------|-------|------------------|-----|----------------------------------|--------------------------------------|
| LWB12-CC   | 11-3/4" | 30 W  | 1890 lm          | 90  | 2200, 2700, 3000<br>3500, 4000 K | 120 V<br>Triac dimming               |
| LWB12-CC-V | 11-3/4" | 30 W  | 1980 lm          | 90  | 2200, 2700, 3000<br>3500, 4000 K | V: 120 / 277 / 347V<br>0-10V dimming |

## LWB12-CC

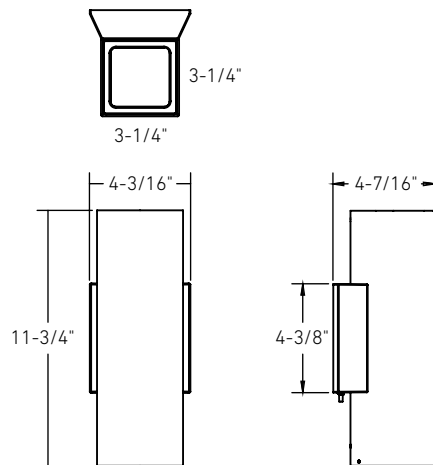

### Specifications

Made of extruded aluminum  
Switch-selectable CCT  
Integrated dimmable driver  
Aluminum end cap for unidirectional lighting included  
5-year warranty

### Finish

● **BK** Black

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# PROFILE

Love at first sight, guaranteed. This will not only give you up and down lighting but also central through a delicate acrylic opening. Want to adapt your lighting to your environment? No problem. This wall mount has five color temperatures to choose from which makes it ideal for city or country living.




| Model    | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|----------|------|-------|------------------|-----|--------------------------------|---------|
| LWJ08-CC | 8"   | 10 W  | 390 lm           | 90  | 2700, 3000, 3500, 4000, 5000 K | 120 V   |
| LWJ16-CC | 16"  | 20 W  | 760 lm           |     |                                |         |
| LWJ24-CC | 24"  | 45 W  | 2345 lm          |     |                                |         |







#### LWJ08-CC



#### LWJ16-CC



#### LWJ24-CC

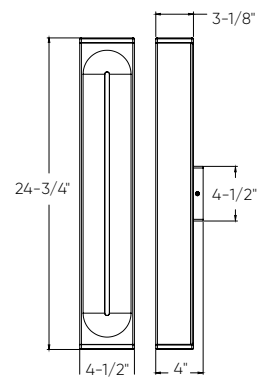

#### Specifications

Made of extruded aluminum  
Unique up, down, and center lighting output  
Low profile design  
Switch-selectable CCT  
Integrated dimmable driver  
5-year warranty

#### Finish

● BK Black

#### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# GEMINI





This sleek design truly utilizes the best features of LED technology. We are now able to create a unique form factor that will project the perfect amount of light.



**ADA**  
COMPLIANT



| Model           | Size | Watts | Delivered lumens | CRI | Color °T                          | Voltage |
|-----------------|------|-------|------------------|-----|-----------------------------------|---------|
| <b>SWS24-CC</b> | 24"  | 20 W  | 900 lm           | 90  | 2700, 3000, 3500,<br>4000, 5000 K | 120 V   |
| <b>SWS36-CC</b> | 36"  | 30 W  | 1600 lm          |     |                                   |         |
| <b>SWS48-CC</b> | 48"  | 40 W  | 1900 lm          |     |                                   |         |
| <b>SWS60-CC</b> | 60"  | 50 W  | 2300 lm          |     |                                   |         |

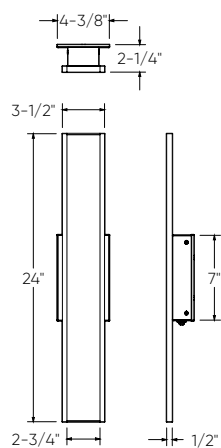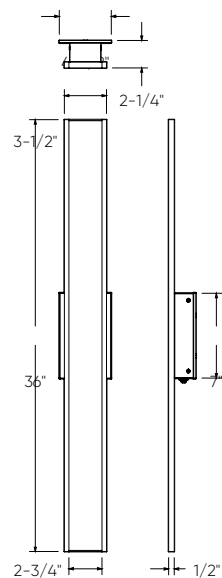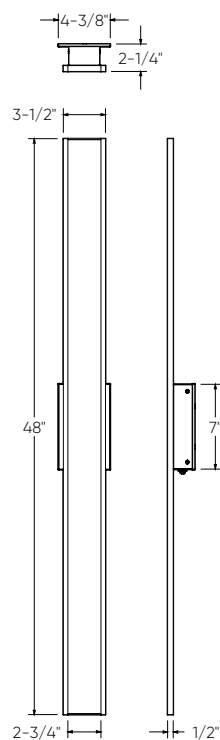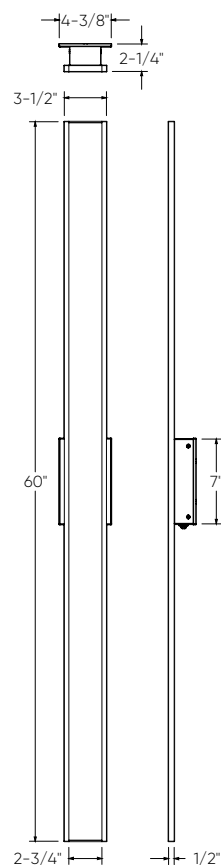**SWS24-CC****SWS36-CC****SWS48-CC****SWS60-CC****Specifications**

Switch-selectable CCT  
 Integrated dimmable driver  
 Compatible with TRIAC and ELV dimmers  
 5-year warranty

**Finish**


● **BK** Black

**Note**

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# MIDNIGHT

The 24-inch indirect linear wall sconce emanates a soft, ambient glow, elegantly transforming any space with its sleek design. Get creative with its versatile mounting options, allowing it to be installed in a clock-like manner, offering a customizable lighting solution.

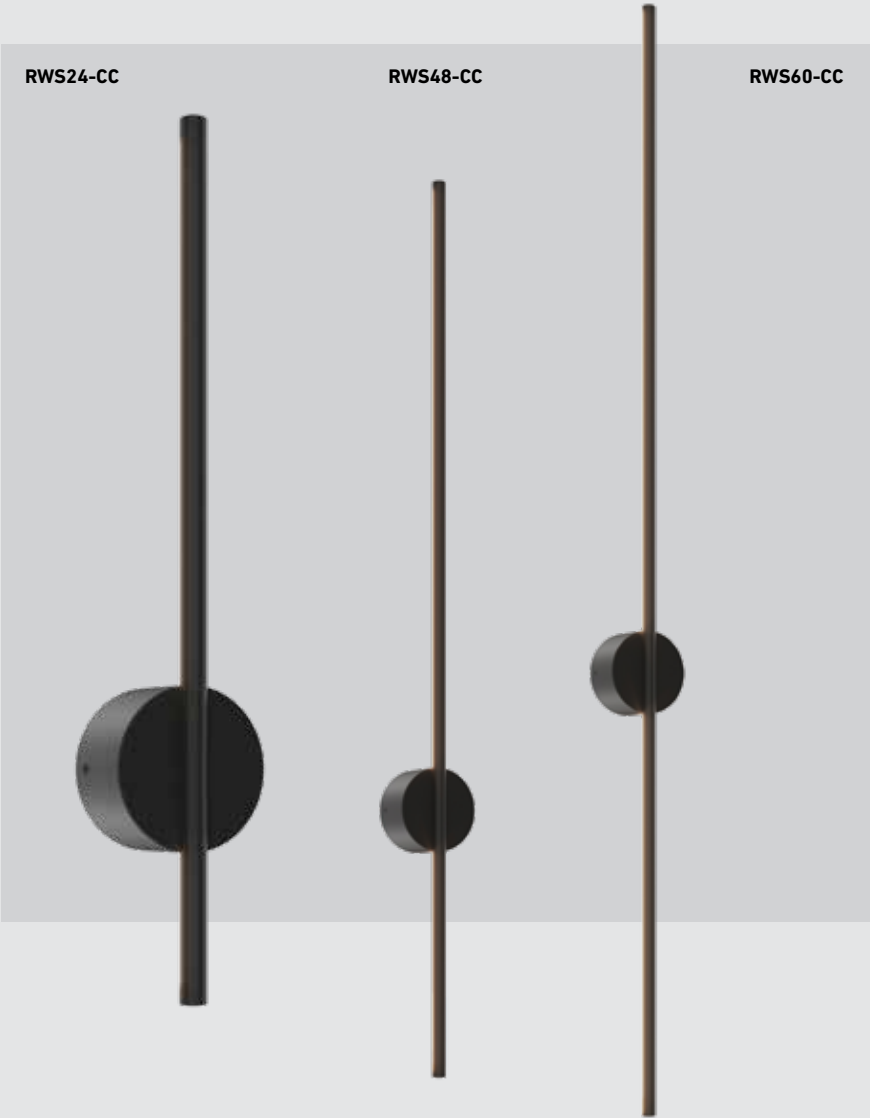


**ADA**  
COMPLIANT




| Model    | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|----------|------|-------|------------------|-----|--------------------------------|---------|
| RWS24-CC | 24"  | 6 W   | 400 lm           | 80  | 2700, 3000, 3500, 4000, 5000 K | 120 V   |
| RWS48-CC | 48"  | 14 W  | 1000 lm          |     |                                |         |
| RWS60-CC | 60"  | 17 W  | 1400 lm          |     |                                |         |


#### RWS24-CC

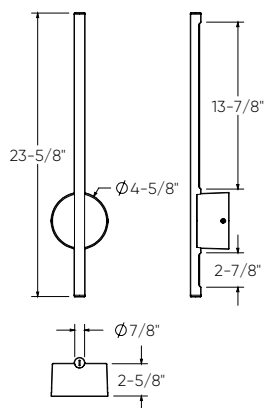

#### RWS48-CC

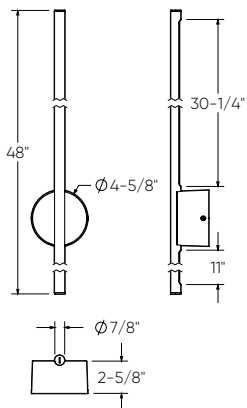

#### RWS60-CC

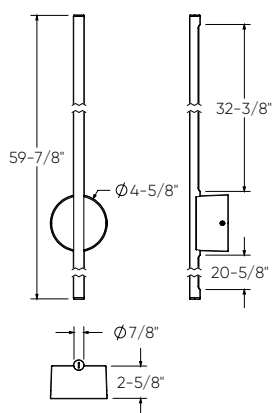

#### Specifications

Switch-selectable CCT  
Integrated dimmable driver  
Wall mount on 4" octagon  
junction box  
5-year warranty

#### Finish


● **BK** Black

#### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# SHIELD


These 5" and 7" DarkSky Certified wall fixtures offer focused, energy-efficient illumination while minimizing light pollution, making them ideal for environmentally conscious outdoor spaces.

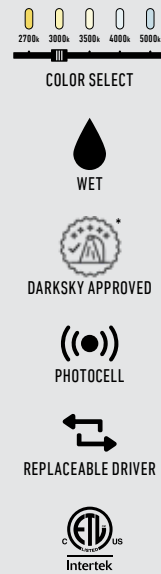


| Model       | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage                        |
|-------------|------|-------|------------------|-----|--------------------------------|--------------------------------|
| DSWC05-CC   | 5"   | 16 W  | 1200 lm          | 90  | 2200, 2700, 3000, 3500, 4000 K | 120 V                          |
| DSWC07-CC-V | 7"   | 24 W  | 2000 lm          | 90  | 2200, 2700, 3000, 3500, 4000 K | V: 120 / 277V<br>0-10V dimming |

\*at 3000K or lower CCT

### DSWC05-CC

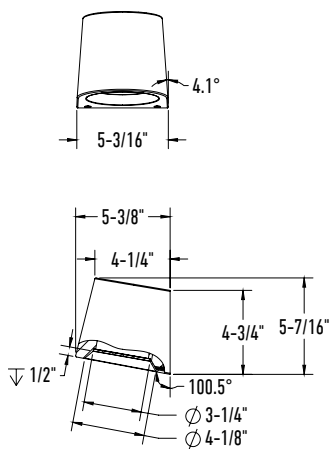

### DSWC07-CC-V

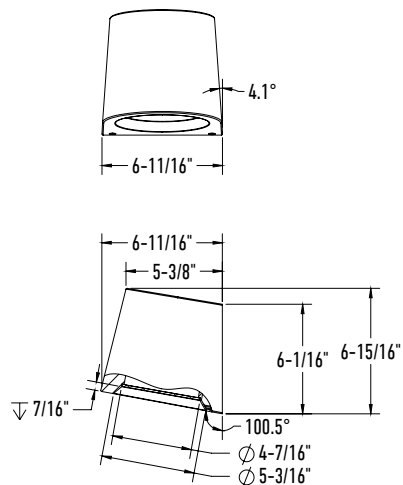

### Specifications

Die-cast aluminum housing  
Switch-selectable CCT  
Integrated photocell for automatic lighting control  
Integrated dimmable driver  
Replaceable driver  
Installs in a standard electrical junction box  
BUG rating: B1-U0-G0  
5-year warranty

### Finish

● **BK** Black

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.



# GENEVA

Imagine being able to manually control the amount of light spread coming from both the top and bottom of your lighting fixture. This is now possible with our LED wall mount.



**ADA**  
COMPLIANT



| Model        | Size   | Watts | Delivered lumens | CRI | Color °T                          | Voltage |
|--------------|--------|-------|------------------|-----|-----------------------------------|---------|
| LEDWALL-G-CC | 4-1/2" | 14 W  | 600 lm           | 90  | 2700, 3000, 3500,<br>4000, 5000 K | 120 V   |





### Specifications

Made of extruded aluminum  
 Separately adjustable up and down lighting  
 Easily adjustable lighting angle from 0° to 92°  
 Superior color consistency  
 Directional lighting  
 Integrated dimmable driver  
 5-year warranty


### Finish

● **BK** Black  
 ○ **WH** White

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

### LEDWALL-G-CC



# HARLOW

This distinctive LED wall-mounted sconce permeates a gentle multi-directional light. Its unique geometric shape and robust design will provide a dramatic flare to any indoor/outdoor space. Ideal for residential and commercial projects, its warm splashes of light create an impressive architectural and alluring touch.



3000k

COLOR TEMPERATURE



WET

**ADA**  
COMPLIANT



| Model     | Size | Watts | Delivered lumens | CRI | Color °T | Voltage |
|-----------|------|-------|------------------|-----|----------|---------|
| LEDWALL-H | 6"   | 15 W  | 900 lm           | 90  | 3000 K   | 120 V   |



### Specifications

Made of extruded aluminum  
Fully sealed light engine  
Unique up and down lighting output  
Integrated dimmable driver  
5-year warranty


### Finish

● **BK** Black

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

### LEDWALL-H



# CUBIX

Imagine being able to manually control the amount of light spread coming out from both the top and bottom of your lighting fixture. This is now possible with our LED wall mount.



LEDWALL001D-CC



| Model          | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|----------------|------|-------|------------------|-----|--------------------------------|---------|
| LEDWALL001D-CC | 4"   | 7 W   | 540 lm           | 90  | 2700, 3000, 3500, 4000, 5000 K | 120 V   |



## Specifications

Up and down lighting  
Easily adjustable lighting angle  
from 0° to 92°  
Integrated dimmable driver  
5-year warranty


## Finish

- **BK** Black
- **WH** White

## Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

## LEDWALL001D-CC

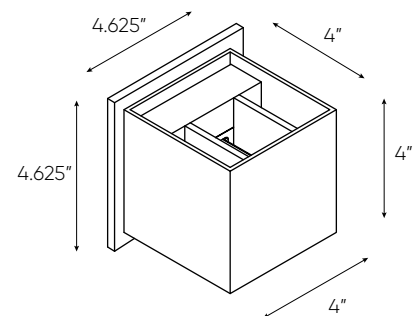

# ALTO

The Alto blends light functionality with an opportunity for artistic creation. Combine multiple fixtures to create infinite compositions or simply use alone, the choice is yours.




**ADA**  
COMPLIANT\*




| Model     | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|-----------|------|-------|------------------|-----|--------------------------------|---------|
| SQS06-CC* | 6"   | 8.5 W | 550 lm           | 90  | 2700, 3000, 3500, 4000, 5000 K | 120 V   |
| SQS10-CC* | 10"  | 13 W  | 800 lm           |     |                                |         |
| SQSTP-CC  | 6"   | 3 W   | 190 lm           |     |                                |         |



## SQS06




## SQS10

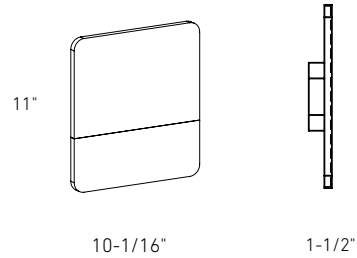

## SQSXX-NUM

0123456789  
0123456789  
0123456789  
0123456789  
0123456789  
- ABCDEFGH  
IJKLMNOPQ  
RSTUVWXYZ

## SQSTP-CC

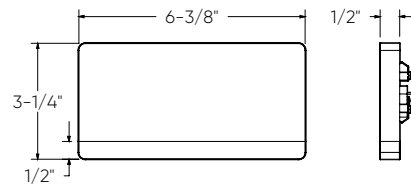

## Specifications

Cast aluminum construction  
Black adhesive character set included with wall sconce only  
Low profile design  
Switch-selectable CCT  
Integrated dimmable driver  
5-year warranty

## Finish

- BK** Black
- WH** White (model SQSTP-CC only)

## Accessories

### SQS06-NUM-BK

An adhesive set of 50 numbers and 27 characters for the SQS06 wall sconce

### SQS10-NUM-BK

An adhesive set of 50 numbers and 27 characters for the SQS10 wall sconce

## Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

NEW

# RISE

This 12" horizontal step light features a streamlined design, offering both uniform illumination and a modern, minimalist aesthetic for stairways and pathways.

2700k

3000k

3500k

4000k

5000k

COLOR SELECT

WET

LSTP12-CC



| Model     | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|-----------|------|-------|------------------|-----|--------------------------------|---------|
| LSTP12-CC | 12"  | 10 W  | 300 lm           | 90  | 2200, 2700, 3000, 3500, 4000 K | 120 V   |





## Specifications

Die-cast aluminum housing  
Switch-selectable CCT  
Integrated dimmable driver  
Fits in 2x3 junction boxes or octagonal junction boxes  
5-year warranty


## Finish

● **BK** Black

## Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

## LSTP12-CC

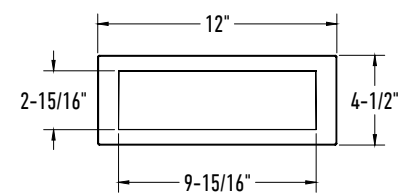

# ECHO

Inspiration will come in abundance once you try our LED accent step lights. Use them outdoors on your deck or on the stairs inside your home. You will be truly impressed by the effect!



| Model          | Size   | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|----------------|--------|-------|------------------|-----|--------------------------------|---------|
| LEDSTEP002D-CC | 4-3/4" | 3 W   | 75 lm            | 90  | 2200, 2700, 3000, 3500, 4000 K | 120 V   |



## Specifications

Die-cast aluminum housing  
Switch-selectable CCT  
Integrated dimmable driver  
Install in standard electrical junction box  
Ideal operating temperature:  
-20° to 40° C  
5-year warranty


## Finish

● **BK** Black  
○ **WH** White

## Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

## LEDSTEP002D-CC



# PEARL

The simplicity of this design allows for the highest level of flexibility when choosing your application. Light glowing from all directions creates the perfect ambiance for every setting.





LEDSTEP004D-CC



| Model          | Size   | Watts | Delivered lumens | CRI | Color °T                          | Voltage |
|----------------|--------|-------|------------------|-----|-----------------------------------|---------|
| LEDSTEP004D-CC | 3-1/4" | 3 W   | 50 lm            | 90  | 2200, 2700, 3000,<br>3500, 4000 K | 120 V   |



## LEDSTEP004D-CC



### Specifications

Die-cast aluminum housing  
Switch-selectable CCT  
Integrated dimmable driver  
Includes a junction box approved for concrete applications  
5-year warranty

### Finish

● **BK** Black  
○ **WH** White

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# CAMBER

The innovation of this design comes from its recessed installation. This step light will be perfectly integrated into stairs and can also be used on decks.




LEDSTEP005D-CC



| Model          | Size   | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|----------------|--------|-------|------------------|-----|--------------------------------|---------|
| LEDSTEP005D-CC | 4-3/4" | 3 W   | 90 lm            | 90  | 2200, 2700, 3000, 3500, 4000 K | 120 V   |

## LEDSTEP005D-CC

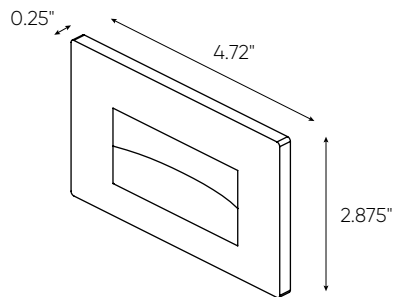

### Specifications

Die-cast aluminum housing  
Switch-selectable CCT  
Integrated dimmable driver  
Install in standard electrical junction box  
5-year warranty

### Finish

- **BK** Black
- **WH** White

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# ASCEND

This flat panel step light, designed for both indoor and outdoor use, combines modern elegance with robust functionality, casting a subtle and inviting glow to enhance safety and aesthetics in any space.




LSTP07-CC



| Model     | Size   | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|-----------|--------|-------|------------------|-----|--------------------------------|---------|
| LSTP07-CC | 4-3/4" | 4 W   | 150 lm           | 90  | 2200, 2700, 3000, 3500, 4000 K | 120 V   |



### LSTP07-CC

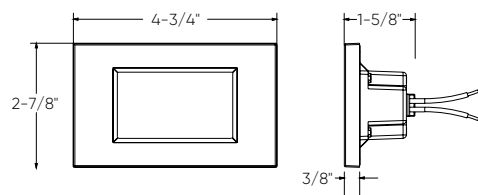

### Specifications

Die-cast aluminum housing  
Switch-selectable CCT  
Integrated dimmable driver  
Install in standard electrical junction box  
5-year warranty

### Finish

- **BK** Black
- **WH** White

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# GLAM


This rechargeable table lamp, featuring three color temperature settings and stepless dimming functionality, offers versatile lighting with a long-lasting 10-hour battery life.



| Model  | Size | Watts | Delivered lumens | CRI | Color °T           | Voltage |
|--------|------|-------|------------------|-----|--------------------|---------|
| RTL-3C | 14"  | 2 W   | 220 lm           | 80  | 2200, 2700, 3000 K | 5 V     |



## RTL-3C

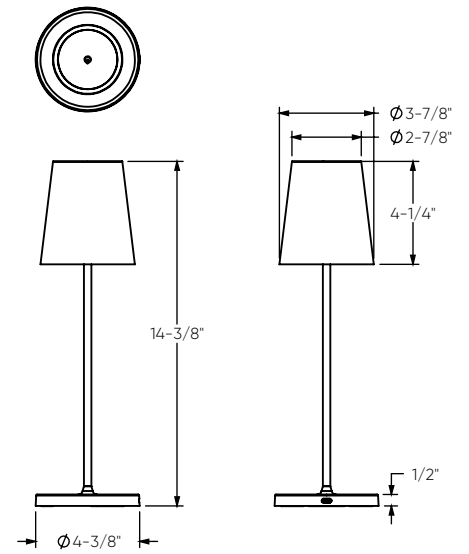

### Specifications

USB-C input/charge  
Button-selectable CCT  
98° beam angle  
Smooth stepless dimming  
5-year warranty

### Finish

- **BK** Black
- **SA** Sage green
- **WH** White

### Note

Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

# ACCESSORIES

## FORMS GENERAL ACCESSORIES

|                                                                                                                                 |                                                                                                           | Model                                        | Finish | Specifications                                                                                                                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|----------------------------------------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LENS COVER</b><br>                          |                          | LNACC-L16FT                                  | White  | <ul style="list-style-type: none"> <li>16-foot lens for Boulevard series pendants, flush mounts and recessed linears</li> </ul>                                                                                                                                                                      |
| <b>GLASS DOME</b><br>                          |                          | GL-CFG13                                     | -      | <ul style="list-style-type: none"> <li>Frosted glass dome replacement for CFG13-CC flush mount</li> </ul>                                                                                                                                                                                            |
| <b>CHARACTER SET</b><br>                       | 0123456789<br>0123456789<br>0123456789<br>0123456789<br>0123456789<br>-ABCDEFGHIJ<br>KLMNOPQR<br>STUVWXYZ | SQS06-NUM-BK<br>SQS10-NUM-BK<br>SQS15-NUM-BK | Black  | <ul style="list-style-type: none"> <li>Adhesive Set: Includes 50 numbers and 27 characters, specifically designed for the SQS series wall sconces.</li> <li>SQS06-NUM-BK: Size per letter: 3 cm</li> <li>SQS10-NUM-BK: Size per letter: 5 cm</li> <li>SQS15-NUM-BK: Size per letter: 7 cm</li> </ul> |
| <b>INTERNAL TRIM</b><br>                     |                        | CYL05-TRIM-XX<br>CYL06-TRIM-XX               |        | <ul style="list-style-type: none"> <li>5" internal trim for CYL05-CC flush-mount cylinders, available in Alzak, Black, Gold, and White</li> <li>6" internal trim for CYL06-CC flush-mount cylinders, available in Alzak, Black, Gold, and White</li> </ul>                                           |
| <b>POWER STEMS</b><br>                       |                        | NAPF20-ACCST24                               |        | <ul style="list-style-type: none"> <li>24" quick-connect Power Stem for Napa and Fusion series pendants – available in black and white</li> </ul>                                                                                                                                                    |
| <b>POWER STEM SLOPED CEILING ADAPTER</b><br> |                        | ACCSTSL                                      |        | <ul style="list-style-type: none"> <li>Sloped ceiling adapter for Napa and Fusion series Power Stems – available in black and white</li> </ul>                                                                                                                                                       |







# LANDSCAPE



12 V



219  
**CONNECTION  
GUIDE**



222  
**SPOT**  
LSP3-CCL  
LSP4-CCL



224  
**SLIM SPOT**  
LSS10-CC



226  
**EDGE**  
LSQP-CC



228  
**FLUX**  
LPP20-CC



230  
**COLUMN**  
LRB20-CC  
LRB30-CC



232  
**SOL**  
GRD2-CC



234  
**CONTOUR**  
LHS07-CC



236  
**TRANSFORMERS**  
LTRP-60  
LTR-300



268  
**ACCESSORIES**

120 V



238  
**FLUX**  
LPP20-CC



252  
**HORIZON MAX**  
DCP-FLD100

24 V



244  
**ORBIT**  
DCP-SPT6



246  
**GAÏA**  
DCP-CPL24



248  
**AXIS**  
DCP-STK20  
DCP-STK50




250  
**ACUTE**  
DCP-45HP20



254  
**HORIZON**  
DCP-FLD30



256  
**MASON**  
DCP-BRK12



258  
**CONTOUR PRO**  
DCP-LHS12



260  
**FLEX**  
DCP-NFTAP5M



262  
**ORION**  
DCP-STG48



264  
**KAYU**  
DCP-RK10  
DCP-RK18



266  
**TRANSFORMERS**  
DCP-MTR60  
DCP-MTR300



# A low-voltage landscape lighting plan

## The three main components



### A. Low-voltage transformer

- The power supply for your system
- Usually mounted near or on the house that is plugged into a regular outdoor-rated **GFCI** electrical outlet.

*\*Avoid mounting the transformer in shady areas, this could interfere with the "dusk-to-dawn" photoelectric cell.*

*\*Should be installed at least 36" (3 feet) off the ground.*



### B. Landscape lighting fixtures

- Integrated LED spot lights, path lights, and bollards.
- Powered by the transformer

*\*When you choose lights, add up the total wattage they consume. You'll need this number for choosing other parts of your landscape lighting system.*



### C. Landscape lighting wire

- The wire connecting the transformer to the light fixtures.
- Rated according to the size of its conductor (gauge)


*\*A 12-gauge wire is larger and can handle more wattage than a 14-gauge wire.*

*\*Selecting the right wire size is important and will prevent any issues down the road.*


#### Transformers



60W




300W



#### Path lights

These fixtures aren't limited to paths. When mounted in gardens, they provide a gentle glow that lights a small surrounding area of plants, rock, or mulch.




#### Spot lights

Use spotlights to make trees, plants, shrubbery, or a home's architectural features stand out.



#### Bollards

Use these lights to enhance the look of your yard while making walkways obvious at night.



#### Landscape wire

Versatile 12, 14, and 16 gauge low-voltage wire for spot lights, path lights, and bollards.

**GOOD  
TO KNOW!**

**Mix it up!** Different types of fixtures can be connected together.

## The four steps for an LED landscape installation



**Check your LED fixtures' voltage requirements. We strongly recommend verifying the voltage at each fixture with a voltmeter before finalizing and burying your installation.**

### 1. Map out a plan

- Start your layout by creating a sketch of your property.
- Be accurate with dimensions to help estimate distances for wire runs.
- Try sketching and measuring as you walk around the property marking where each fixture will be placed.


### 2. Set fixture locations

- Mark their locations with small flags on your property and indicate their placement on your sketch.
- Measure distances between fixtures and write them down on your layout.

### 3. Choose a power supply

- To figure out which power supply is best, consider two things: the total wattage of the lights that you're purchasing and if you anticipate adding lights in the future.
- When you add up the wattage of all lights, you'll have a good idea of how powerful your transformer needs to be. However, the total wattage of your lights should be 20 percent less than the transformer's rated wattage.
- Once you've selected the right transformer, the best placement is usually next to the house in a hidden location, as close as possible to the fixtures.

### Sample 12V Lighting Layout

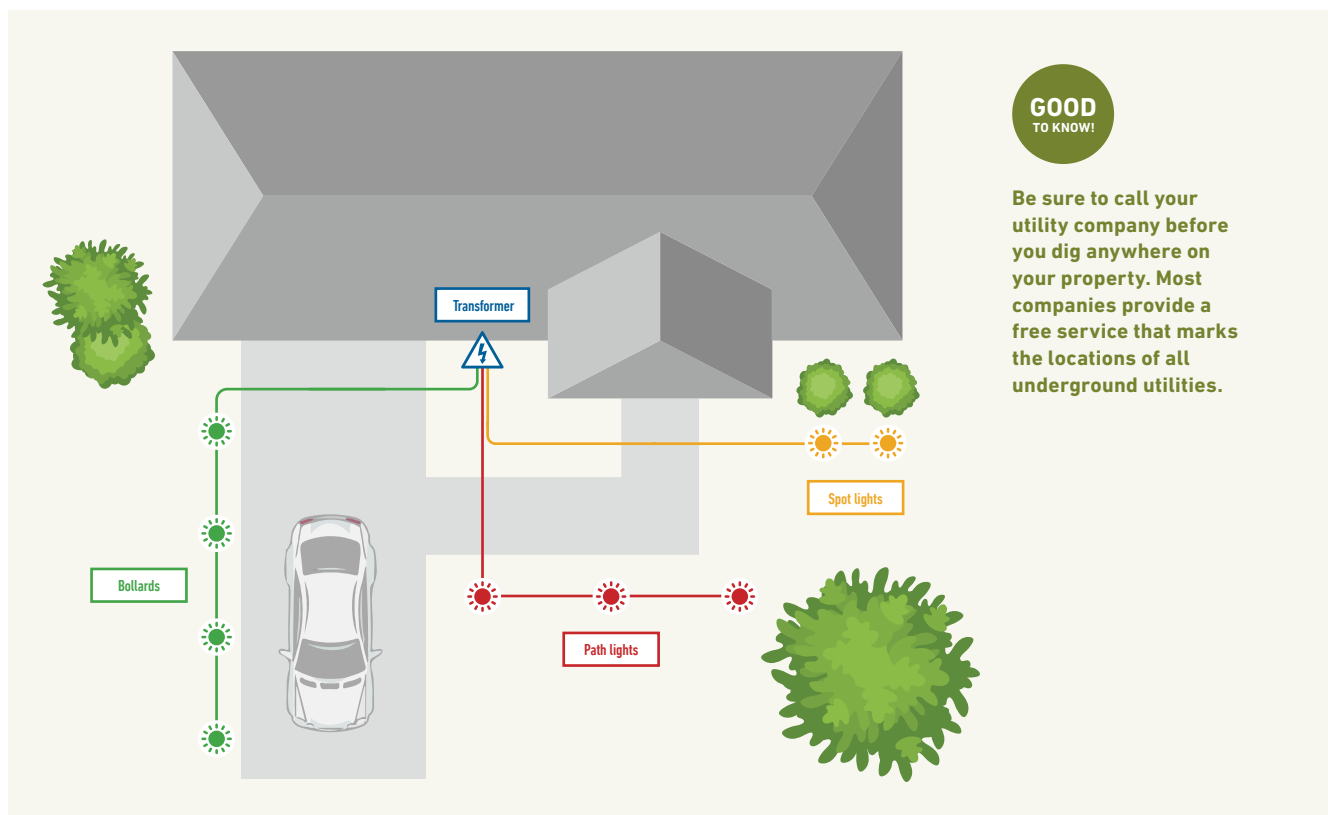



**Safe! Low-voltage lighting installations are much safer than 120V systems, with a significantly lower risk of electric shock and fire hazards.**

**4. Wiring**

Now you need to provide power to the fixtures. The length of runs helps determine what gauge of wire to buy. As a general rule, try to keep the runs under 50 feet with a maximum of 8 fixtures per run. Lower loads per run means lower voltage drop.

**What is Voltage Drop?**

Voltage decreases as it moves through a run of wire and a series of lights. This means that, because each light is receiving a little less than the one before it, lights can appear dimmer toward the end of a series. A small loss is OK, but anything more than a 1.5-volt drop should be corrected.

**Minimize voltage drop and reduce wasted wire by using one of the wiring methods below:**

**Daisy Chain (A)**


Connects all fixtures in a linear fashion, where the first fixture connects to the transformer.

**T-Method (B)**


Similar to the Daisy Chain method, except the transformer connects to the middle of the chain

**Hub Method (C)**

All fixtures run through a hub junction and are connected to a single line from the transformer, ensuring each fixture receives an equal share of voltage

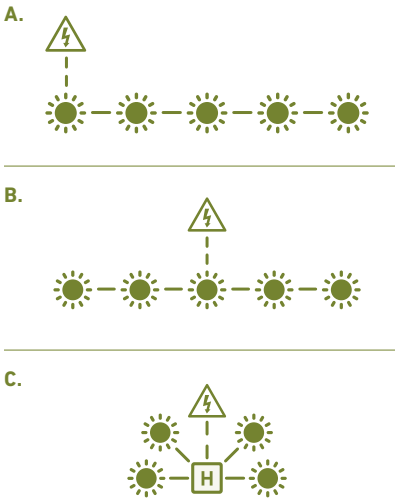

**Sample 12V Wiring Diagram**

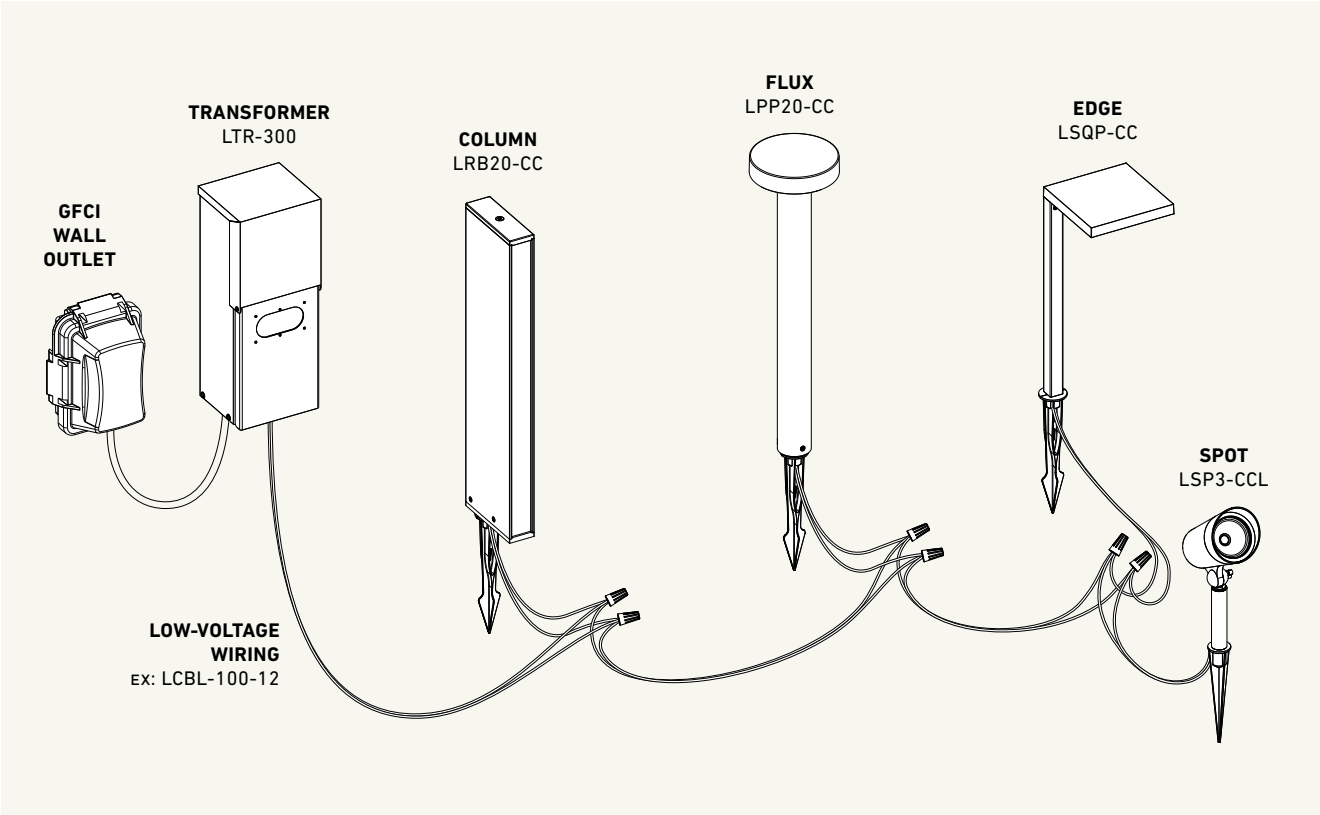

# SPOT


This durable, fully sealed 12V LED landscape spot is constructed of solid aluminum. It includes an integrated LED module that emits a cool, natural, or warm white light in multiple beam patterns, all selectable with a 5CCT switch. Can be rotated 180° and equipped with a glare shield for pinpoint accuracy. The landscape spotlight is great for gardens, tree uplighting, architectural lighting, and more.




| Model    | Size | Watts | Delivered lumens | CRI | Color °T          | Voltage |
|----------|------|-------|------------------|-----|-------------------|---------|
| LSP3-CCL | 3"   | 10 W  | 500 lm           | 80  | 2200, 2700, 3000, | 12 VAC  |
| LSP4-CCL | 4"   | 20 W  | 1000 lm          |     | 3500, 4000 K      |         |



#### LSP3-CCL

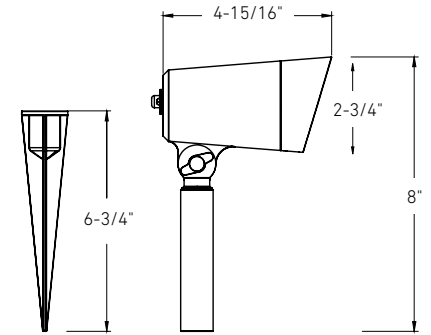

#### LSP4-CCL

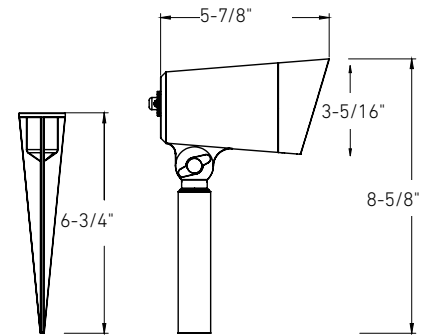

#### Specifications

Switch-selectable CCT  
Easy-access CCT switch on back of spot  
Interchangeable 20°, 40°, and 90° beam angle lens  
180° swiveling head  
Ground stake included  
5-year warranty

#### Finish

● **BK** Black

#### Power supplies

##### LTRP-60-BK

60W, 120 VAC 60Hz input  
12 VAC output low-voltage transformer

##### LTR-300-BK

300W, 120 VAC 60Hz input  
12/13/14/15 VAC output low-voltage transformer

#### Note

Low-voltage transformer required.  
Sold separately.  
Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

#### Accessories

##### LAN-ACC-MS

6-3/4" metal ground stake

##### LSP-EXT04

4" extension arm

##### LSP-WM

Spotlight wall mount adapters

##### LCBL-50-16

50 feet of 16 gauge low-voltage wiring

##### LCBL-100-16

100 feet of 16 gauge low-voltage wiring

##### LCBL-50-14

50 feet of 14 gauge low-voltage wiring

##### LCBL-100-14

100 feet of 14 gauge low-voltage wiring

##### LCBL-100-12

100 feet of 12 gauge low-voltage wiring

##### LCBL-200-12

200 feet of 12 gauge low-voltage wiring




# SLIM SPOT

Illuminate your outdoor landscape with precision using this 12V spotlight, featuring a narrow 10° beam angle for focused and impactful lighting.



| Model    | Size   | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|----------|--------|-------|------------------|-----|--------------------------------|---------|
| LSS10-CC | 5-1/2" | 10 W  | 370 lm           | 80  | 2200, 2700, 3000, 3500, 4000 K | 12 VAC  |

## LSS10-CC

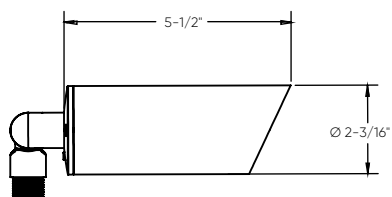

## Specifications

180° swiveling head  
Ground stake included  
10° beam angle  
Switch-selectable CCT  
5-year warranty

## Note

Low-voltage transformer required.  
Sold separately.  
Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

## Finish

● **BK** Black

## Power supplies

### LTRP-60-BK

60W, 120 VAC 60Hz input  
12 VAC output low-voltage transformer

### LTR-300-BK

300W, 120 VAC 60Hz input  
12/13/14/15 VAC output low-voltage transformer

## Accessories

### LAN-ACC-MS

6-3/4" metal ground stake

### LSP-EXT04

4" extension arm

### LSP-WM

Spotlight wall mount adapters

### LCBL-50-16

50 feet of 16 gauge low-voltage wiring

### LCBL-100-16

100 feet of 16 gauge low-voltage wiring

### LCBL-50-14

50 feet of 14 gauge low-voltage wiring

### LCBL-100-14

100 feet of 14 gauge low-voltage wiring

### LCBL-100-12

100 feet of 12 gauge low-voltage wiring

### LCBL-200-12

200 feet of 12 gauge low-voltage wiring

# EDGE


A symmetrical luminaire made of rust-resistant aluminum and finished in a matte textured paint. Perfect for walkways, garden beds, or simply to direct the eye to some of your home's best features. Equipped with color-select technology that allows you to cast a particular color of light.



| Model   | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|---------|------|-------|------------------|-----|--------------------------------|---------|
| LSQP-CC | 12"  | 3 W   | 265 lm           | 80  | 2200, 2700, 3000, 3500, 4000 K | 12 VAC  |



### LSQP-CC

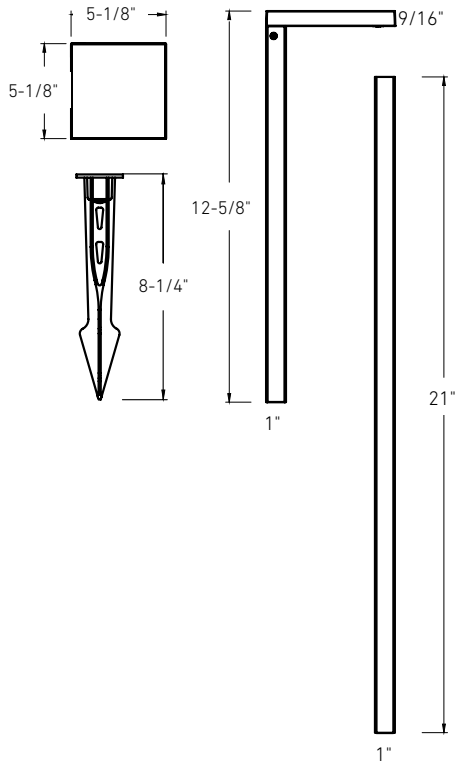

### Specifications

Ground stake included  
90° beam angle  
Switch-selectable CCT  
21" extension tube included  
5-year warranty

### Note

Low-voltage transformer required.  
Sold separately.  
Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

### Finish

● **BK** Black

### Power supplies

**LTRP-60-BK**  
60W, 120 VAC 60Hz input  
12 VAC output low-voltage transformer

**LTR-300-BK**  
300W, 120 VAC 60Hz input  
12/13/14/15 VAC output low-voltage transformer

### Accessories

**LCBL-50-16**  
50 feet of 16 gauge low-voltage wiring

**LCBL-100-16**  
100 feet of 16 gauge low-voltage wiring

**LCBL-50-14**  
50 feet of 14 gauge low-voltage wiring

**LCBL-100-14**  
100 feet of 14 gauge low-voltage wiring

**LCBL-100-12**  
100 feet of 12 gauge low-voltage wiring

**LCBL-200-12**  
200 feet of 12 gauge low-voltage wiring

# FLUX


Add visual interest to your garden with the Flux outdoor path light. A 360° light spread and cast aluminum construction with a powder-coated finish fits best along pathways, garden beds, and walkways.



| Model    | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|----------|------|-------|------------------|-----|--------------------------------|---------|
| LPP20-CC | 20"  | 8 W   | 360 lm           | 80  | 2200, 2700, 3000, 3500, 4000 K | 12 VAC  |



## LPP20-CC

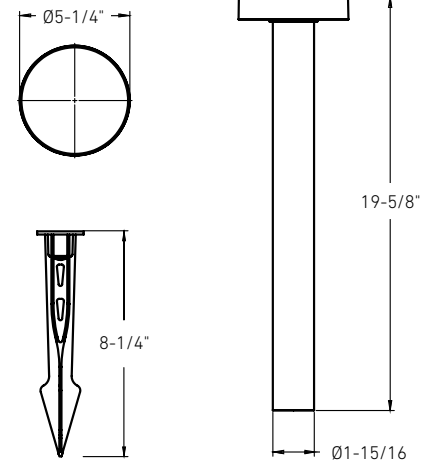

## Specifications

Ground stake included  
93° beam angle  
Can be mounted to wood or concrete (screws not included)  
Switch-selectable CCT  
5-year warranty

## Note

Low-voltage transformer required.  
Sold separately.  
Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

## Finish

● **BK** Black

## Power supplies

**LTRP-60-BK**  
60W, 120 VAC 60Hz input  
12 VAC output low-voltage transformer

**LTR-300-BK**  
300W, 120 VAC 60Hz input  
12/13/14/15 VAC output low-voltage transformer

## Accessories

**LCBL-50-16**  
50 feet of 16 gauge low-voltage wiring

**LCBL-100-16**  
100 feet of 16 gauge low-voltage wiring

**LCBL-50-14**  
50 feet of 14 gauge low-voltage wiring

**LCBL-100-14**  
100 feet of 14 gauge low-voltage wiring

**LCBL-100-12**  
100 feet of 12 gauge low-voltage wiring

**LCBL-200-12**  
200 feet of 12 gauge low-voltage wiring


# COLUMN

The Column series, a robust rectangular bollard that features a minimalist design for the ultimate in urban sophistication. Constructed of solid aluminum, it provides a chic solution to eco-conscious homeowners.




| Model    | Size | Watts | Delivered lumens | CRI | Color °T          | Voltage |
|----------|------|-------|------------------|-----|-------------------|---------|
| LRB20-CC | 20"  | 12 W  | 600 lm           | 80  | 2200, 2700, 3000, | 12 VAC  |
| LRB30-CC | 30"  | 13 W  | 700 lm           |     | 3500, 4000 K      |         |

### LRB20-CC

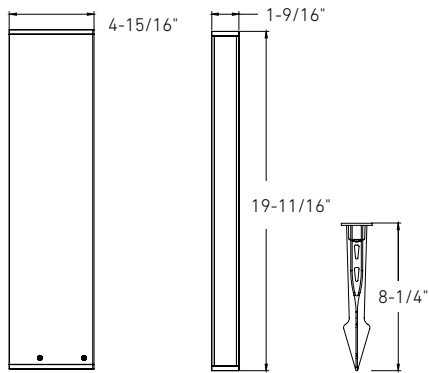

### LRB30-CC

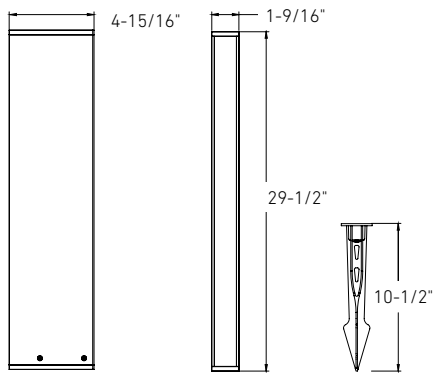

### Specifications

Ground stake included  
108° beam angle  
Can be mounted to wood or concrete  
using the included mounting bracket  
(screws not included)  
Switch-selectable CCT  
5-year warranty

### Finish

● **BK** Black

### Power supplies

#### LTRP-60-BK

60W, 120 VAC 60Hz input  
12 VAC output low-voltage transformer

#### LTR-300-BK

300W, 120 VAC 60Hz input  
12/13/14/15 VAC output low-voltage  
transformer

### Note

Low-voltage transformer required.  
Sold separately.

Other color temperatures and finish options  
are available but may require minimum order  
quantities (MOQs) and longer lead times.  
Please contact your DALI representative for  
more information.

### Accessories

#### LCBL-50-16

50 feet of 16 gauge low-voltage wiring

#### LCBL-100-16

100 feet of 16 gauge low-voltage wiring

#### LCBL-50-14

50 feet of 14 gauge low-voltage wiring

#### LCBL-100-14

100 feet of 14 gauge low-voltage wiring

#### LCBL-100-12

100 feet of 12 gauge low-voltage wiring

#### LCBL-200-12

200 feet of 12 gauge low-voltage wiring

# SOL

This durable, fully sealed 12V LED recessed ground light features an integrated LED module that provides cool, natural, or warm white light, all adjustable via a 5CCT switch. It is ideal for uplighting, wall washing, pathways, garden accents, and architectural highlights.



WET

**IP67**  
RATED




| Model   | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|---------|------|-------|------------------|-----|--------------------------------|---------|
| GRD2-CC | 2"   | 9 W   | 600 lm           | 80  | 2200, 2700, 3000, 3500, 4000 K | 12 VAC  |





## GRD2-CC



## Specifications

Switch-selectable CCT  
 IP67-rated products are dustproof and can withstand immersion in water up to 1 meter for 30 minutes  
 Maximum static load: 3,000 lbs  
 Impact protection: IK09  
 Can be recessed or surface mounted  
 Includes a mounting housing  
 30° beam angle  
 5-year warranty

## Finish

● **BK** Black

## Power supplies

**LTRP-60-BK**  
 60W, 120 VAC 60Hz input  
 12 VAC output low-voltage transformer

**LTR-300-BK**  
 300W, 120 VAC 60Hz input  
 12/13/14/15 VAC output low-voltage transformer

## Note

Low-voltage transformer required.  
 Sold separately.  
 Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

## Accessories

**LCBL-50-16**  
 50 feet of 16 gauge low-voltage wiring  
**LCBL-100-16**  
 100 feet of 16 gauge low-voltage wiring  
**LCBL-50-14**  
 50 feet of 14 gauge low-voltage wiring  
**LCBL-100-14**  
 100 feet of 14 gauge low-voltage wiring  
**LCBL-100-12**  
 100 feet of 12 gauge low-voltage wiring  
**LCBL-200-12**  
 200 feet of 12 gauge low-voltage wiring

# CONTOUR

The Contour's compact size ensures a discreet and unobtrusive appearance while providing ample illumination for small to medium-sized areas. Its sleek and modern design seamlessly integrates into hardscape elements such as walls, steps, and patios. Crafted with high-quality materials, this fixture is built to withstand the elements, ensuring long-lasting durability and performance.




| Model    | Size | Watts | Delivered lumens | CRI | Color °T                       | Voltage |
|----------|------|-------|------------------|-----|--------------------------------|---------|
| LHS07-CC | 7"   | 3 W   | 200 lm           | 80  | 2200, 2700, 3000, 3500, 4000 K | 12 VAC  |





## LHS07-CC

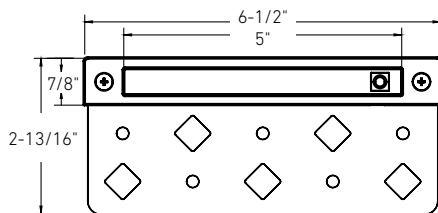

## Specifications

- 110° beam angle
- Can be mounted to wood or concrete
- Surface or recessed installation
- Switch-selectable CCT
- 5-year warranty

## Finish

- BK** Black

## Power supplies

### LTRP-60-BK

- 60W, 120 VAC 60Hz input
- 12 VAC output low-voltage transformer

### LTR-300-BK

- 300W, 120 VAC 60Hz input
- 12/13/14/15 VAC output low-voltage transformer

## Note

Low-voltage transformer required.  
Sold separately.

Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

## Accessories

### LCBL-50-16

50 feet of 16 gauge low-voltage wiring

### LCBL-100-16

100 feet of 16 gauge low-voltage wiring

### LCBL-50-14

50 feet of 14 gauge low-voltage wiring

### LCBL-100-14

100 feet of 14 gauge low-voltage wiring

### LCBL-100-12

100 feet of 12 gauge low-voltage wiring

### LCBL-200-12

200 feet of 12 gauge low-voltage wiring

# LOW-VOLTAGE TRANSFORMERS

Outdoor low-voltage transformers with timer and photocell sensor, 120 VAC to 12V/13V/14V/15 VAC, weatherproof.



LTR-300



LTRP-60



#### Model

##### LTRP-60-BK

60W low-voltage transformer

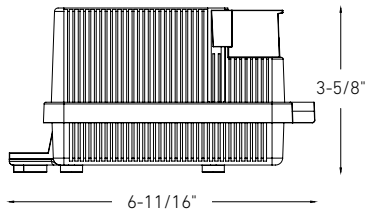

#### Specifications

Constant voltage mode power supply  
Protection: short circuit / Over voltage  
Input voltage: 120 VAC 60Hz  
Output Power: 60W  
Output voltage: 12 VAC  
Photocell sensor  
Operating temperature: -30°C to 45°C  
UL certification  
5 year warranty


#### Finish

● **BK** Black

#### Model

##### LTR-300-BK

300W low-voltage transformer

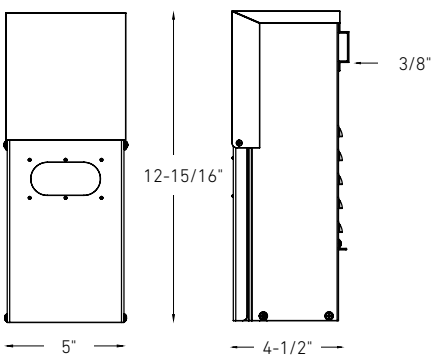

#### Specifications

Constant voltage mode power supply  
Protection: short circuit / Over voltage  
Fully isolated metal case -  
Cooling by air convection  
Input voltage: 120 VAC 60Hz  
Output Power: 300W  
Output voltage: 12, 13, 14, 15 VAC  
Photocell sensor  
Operating temperature: -30°C to 45°C  
UL certification  
5 year warranty

#### Finish

● **BK** Black

# STATURE


Add warm light to your outdoor landscape with this contemporary bollard. A modern statement, Stature features integrated LED's to ensure a long-lasting, energy-efficient, and maintenance-free illumination.

3000k

COLOR TEMPERATURE

  
WET



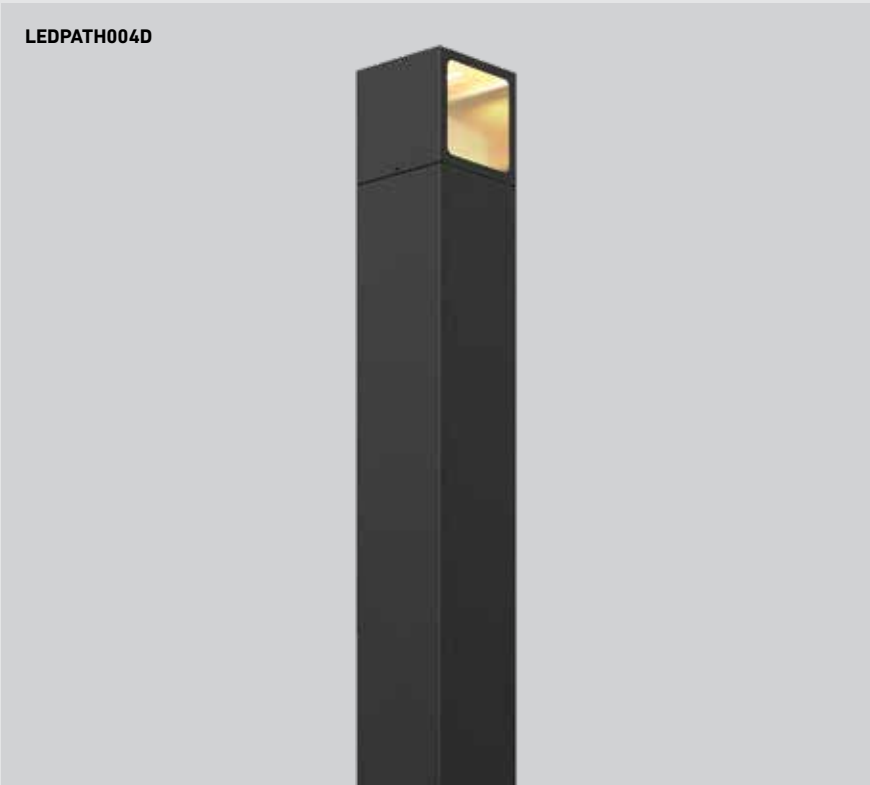

| Model       | Size | Watts | Delivered lumens | CRI | Color °T | Voltage |
|-------------|------|-------|------------------|-----|----------|---------|
| LEDPATH004D | 36"  | 7.5 W | 350 lm           | 90  | 3000 K   | 120 V   |



### Specifications

Integrated dimmable driver  
Anchor bolts included  
5-year warranty


### Finish

● **BK** Black

### Note

Other color temperatures and finish options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

### LEDPATH004D






---

How to create

# A DALS Connect PRO Smart Landscape Plan

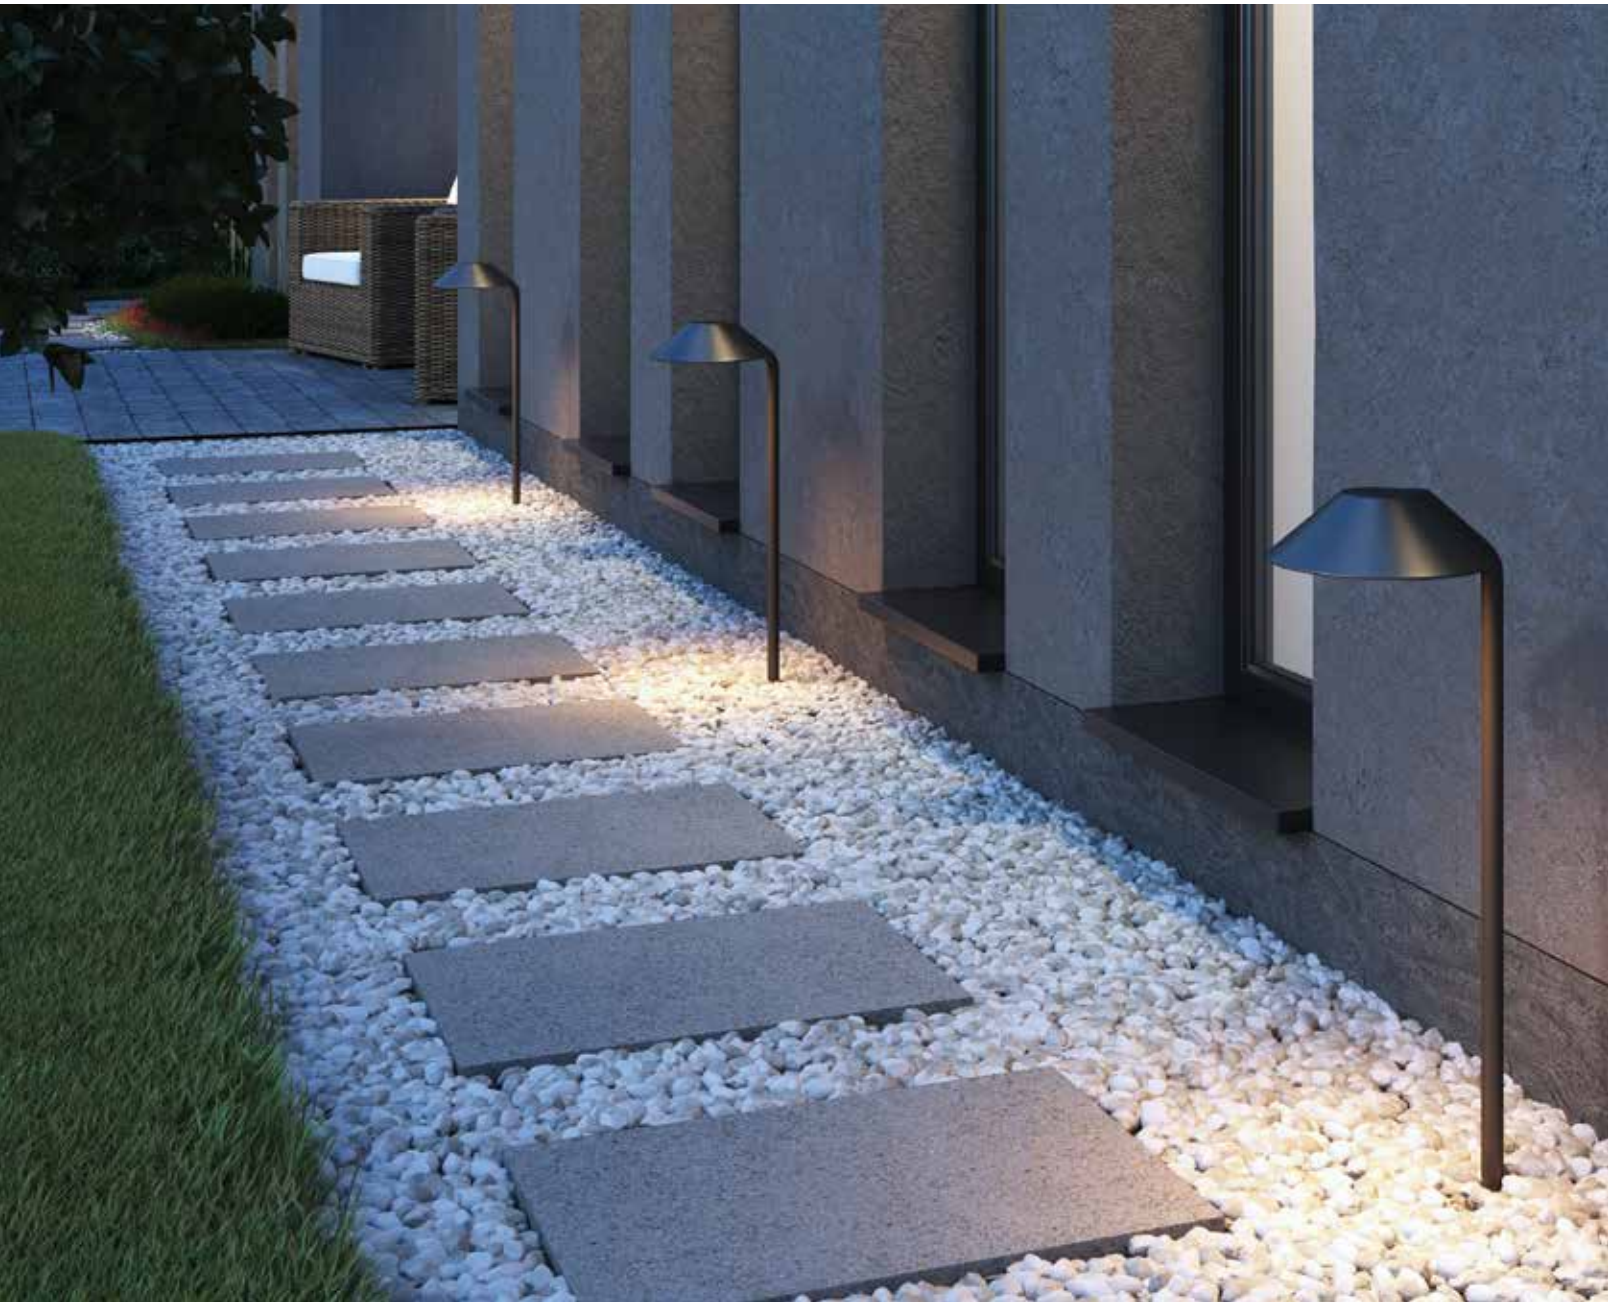

## The main components



### A. Low-voltage transformer

- The power supply for your system
- Usually mounted near or on the house that is plugged into a regular outdoor-rated gfcı electrical outlet.
- \* Avoid mounting the transformer in an area with poor Wi-Fi reception.
- \* Should be installed at least 36" (3 feet) off the ground.




### B. Landscape lighting fixtures

- DALS Connect PRO integrated LED spot lights, path lights, flood light, step light, stick light or ground light.
- Powered by the transformer
- \* When you choose lights, add up the total wattage they consume. You'll need this number for choosing the right transformer for your system.




Mix it up! Different types of DALS Connect PRO fixtures can be paired together with your smart landscape




#### Transformers

These 24V transformers come in two power capacities, 60W and 300W. An integrated PRO hub is also included.




#### Plug-in Transformer & DALS Connect PRO Hub

Use the 36W DC adapter paired with a PRO Hub for smaller landscape projects




#### Plug-in Transformer

Use the 36W DC adapter paired without a hub for smaller landscape projects with local controls.



#### Path lights

These fixtures aren't limited to paths. When mounted in gardens, they provide a gentle glow that lights a small surrounding area of plants, rock, or mulch.



#### Spot lights

Use spotlights to make trees, plants, shrubbery, or a home's architectural features stand out.



#### Stick lights

Use these lights to enhance the look of your yard while making walkways obvious at night.




#### Step Light

These fixtures can be surface-mounted to most surfaces, offering a soft glow that enhances visibility and style below.



#### Rock Light

Add a touch of magic to your landscape with these glowing rock fixtures, blending seamlessly into natural surroundings while providing soft, ambient lighting.



#### Flood Light

Use these lights to create wall washes or illuminate large areas of your yard.

## The science behind your SMART landscape



**Check your LED fixtures' voltage requirements. We strongly recommend verifying the voltage at each fixture with a voltmeter before finalizing and burying your installation.**

### 1. Map out a plan

- Start your layout by creating a sketch of your property.
- Be accurate with dimensions to help estimate distances for wire runs.
- Try sketching and measuring as you walk around the property marking where each fixture will be placed.
- You can also mark the spots on your land where the Wi-Fi signal drops on your phone, this will help determine the preferred spot for your transformer placement.


### 2. Set fixture locations

- Mark their locations with small flags on your property and indicate their placement on your sketch.
- Measure distances between fixtures and write them down on your layout.
- Note how far away your Wi-Fi signal can reach.
- Check that all smart landscape products are within 30 feet of each other for maximum connectivity.
- We recommend pairing your smart landscape lights closer to the house first, and then move them to their desired location. An Internet connection is required for the first pairing.

### 3. Choose a power supply

- To figure out which power supply is best, consider two things: the total wattage of the lights that you're purchasing and if you anticipate adding lights in the future.
- When you add up the wattage of all lights, you'll have a good idea of how powerful your transformer needs to be. The total wattage cannot exceed the capacity of the transformer.
- Once you've selected the right transformer, the best placement is usually next to the house in a hidden location, as close as possible to the first fixture and to your Wi-Fi.

### Sample 24V Smart Lighting Layout

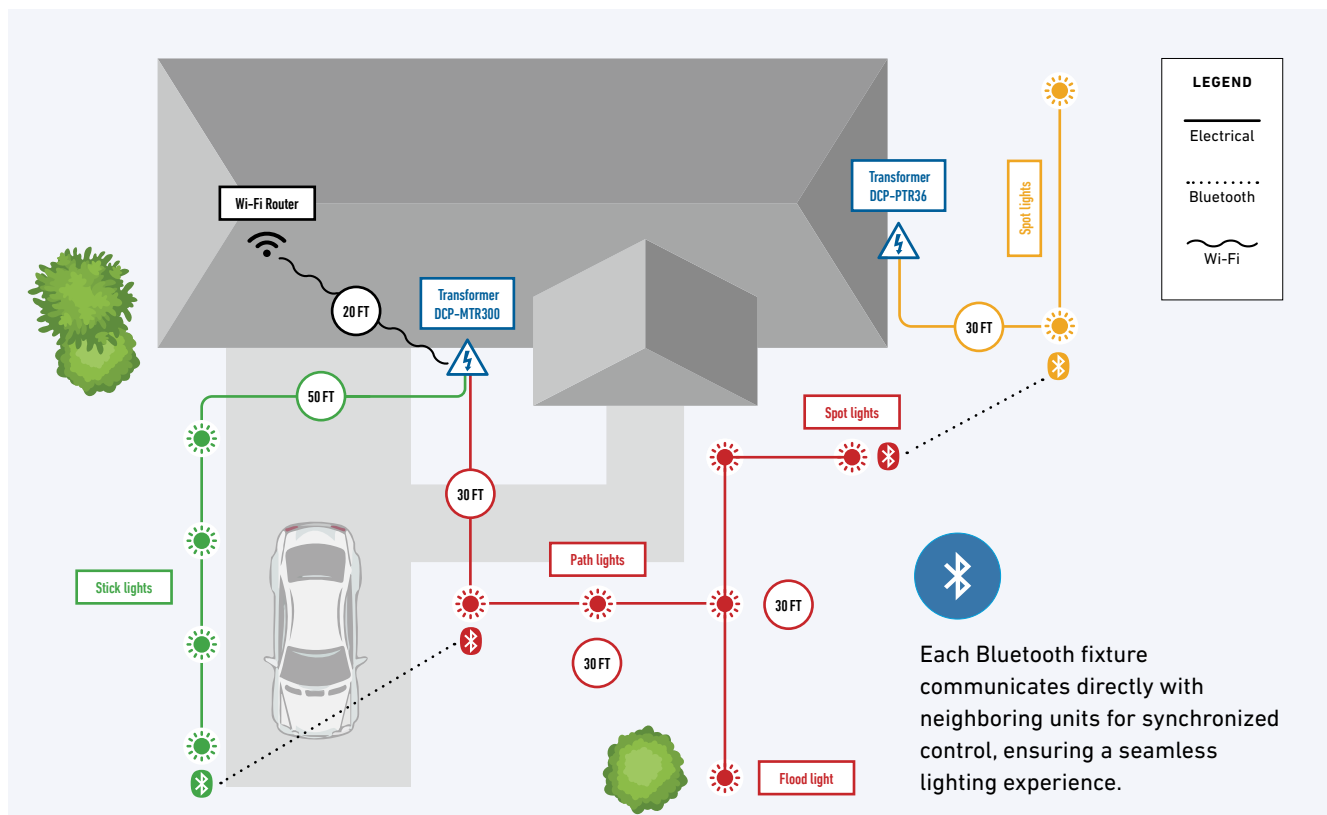





Be sure to call your utility company before you dig anywhere on your property. Most companies provide a free service that marks the locations of all underground utilities.

#### 4. Wiring

To set up DALI Connect PRO smart landscape products, use low-voltage wiring (not included) and secure connections with marettes for a customizable installation.

##### What is Voltage Drop?


Voltage decreases as it moves through a run of wire and a series of lights. This means that, because each light is receiving a little less than the one before it, lights can appear dimmer toward the end of a series. A small loss is OK, but anything more than a 2.5-volt drop should be corrected.

#### Checklist

Before you get ready to install your lights, make sure you have all the tools and accessories required. Below is a basic list of what you might need.

- Landscape lights
- Transformer
- Wire
- Tape measure
- Hardware for installing the transformer on a house or post
- Your Wi-Fi password

#### Sample 24V Smart Wiring Diagram

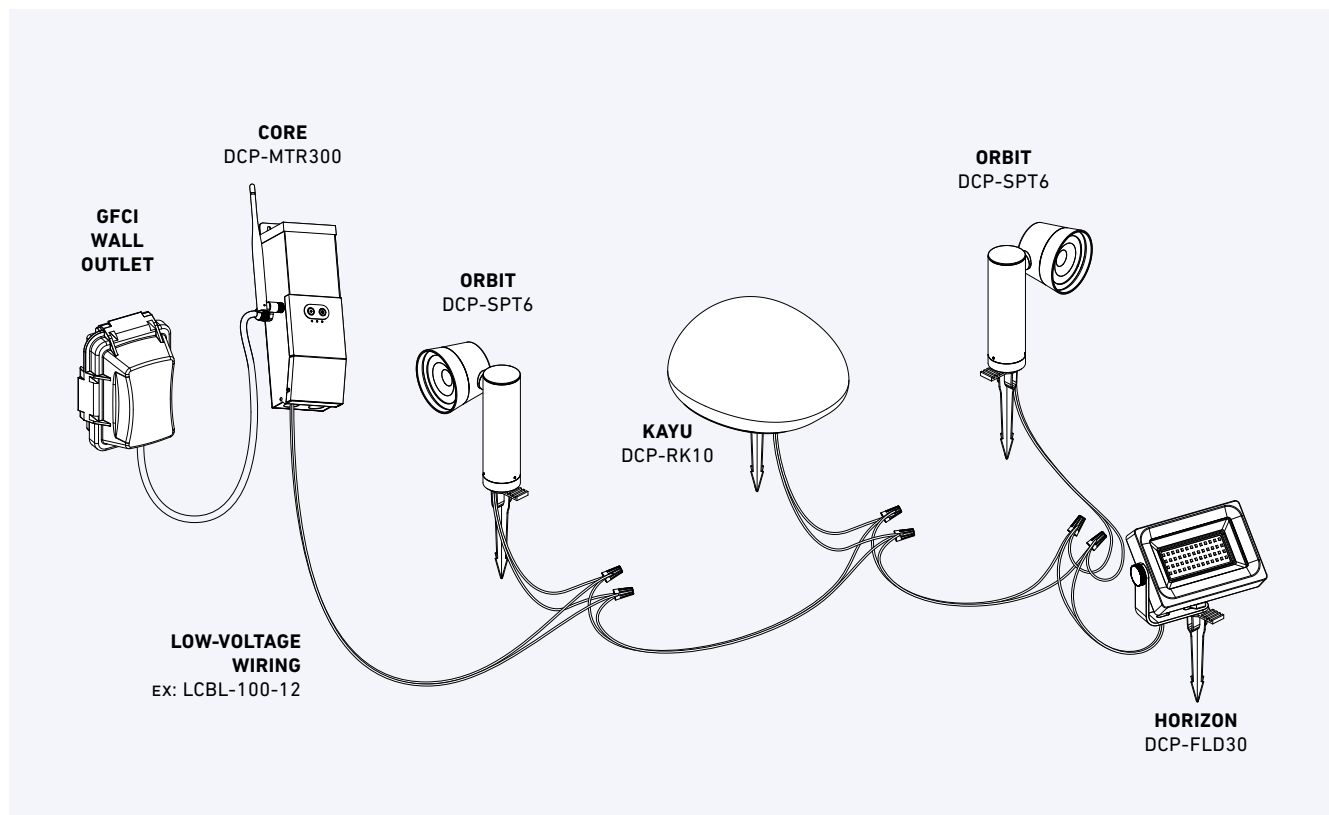

# ORBIT



A swiveling, low profile light designed to brighten a number of exterior applications. Ideal for walkways and flower beds but fits comfortably in any environment. Add a second or third fixture together and create a multi-head device.



| Model    | Size | Watts | Delivered lumens | CRI | Color °T              | Voltage |
|----------|------|-------|------------------|-----|-----------------------|---------|
| DCP-SPT6 | 6"   | 10 W  | 540 lm           | 90  | RGB + 2200 K - 4000 K | 24 VDC  |



## DCP-SPT6



## Specifications

Full color spectrum  
2200K - 4000K in pure whites  
120° frosted lens included  
40° beam angle  
Up to three Orbit fixtures can be combined  
Dimmable through the DALI Connect app and the Click remote (DCP-RMCT)  
5-year warranty

## Note

Add the DALI Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

## Finish

● **BK** Black

## Smart transformers

### DCP-MTR60

60W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

### DCP-MTR300

300W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

## Download the DALI Connect app

Create groups  
Set schedules  
Remote access\*  
Compatible with Google Assistant and Amazon Alexa\*



\* Core needed

## Accessories

### DCP-RMCT

Smart remote

### DCP-PTR36

Plug-in driver

### DCP-ACC-MS12

12" metal ground stake

### DCP-ACC-MS06

6" metal ground stake

### DCP-ACC-MB

Mounting bracket

### DCP-SPTXT14

14" extension tube

### LCBL-50-16, LCBL-100-16

50 or 100 feet of 16-gauge  
low-voltage wiring

### LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge  
low-voltage wiring

### LCBL-100-12, LCBL-200-12

100 or 200 feet of 12-gauge  
low-voltage wiring

# GAÏA

The main quality of this modern classic is providing downward, wide-area lighting that is both calming and practical. The luminaire includes a head that not only creates unique highlights in flower beds and neatly groomed lawns but can easily light up walkways and winding paths.



DCP-CPL24




**Easy-Select Button**  
No app needed, press to choose from 7 colors or tunable white tones (2200K–4000K).

| Model     | Size | Watts | Delivered lumens | CRI | Color °T                 | Voltage |
|-----------|------|-------|------------------|-----|--------------------------|---------|
| DCP-CPL24 | 24"  | 6 W   | 470 lm           | 80  | RGB + 2200 K<br>- 4000 K | 24 VDC  |



## DCP-CPL24

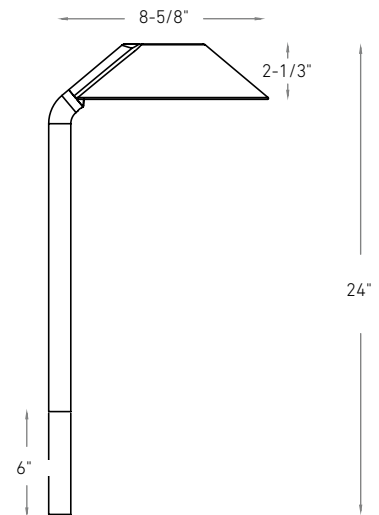

### Specifications

Full color spectrum  
2200K - 4000K in pure whites  
Adjustable height: 18" or 24"  
120° beam angle  
Dimmable through the DALI Connect app and the Clicc remote (DCP-RMCT)  
5-year warranty

### Note

Add the DALI Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

### Finish

● **BK** Black

### Smart transformers

#### DCP-MTR60

60W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

#### DCP-MTR300

300W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

### Download the DALI Connect app

Create groups  
Set schedules  
Remote access\*  
Compatible with Google Assistant and Amazon Alexa\*



\* Core needed

### Accessories

#### DCP-RMCT

Smart remote

#### DCP-PTR36

Plug-in driver

#### DCP-ACC-MS12

12" metal ground stake

#### DCP-ACC-MS06

6" metal ground stake

#### LCBL-50-16, LCBL-100-16

50 or 100 feet of 16-gauge  
low-voltage wiring

#### LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge  
low-voltage wiring

#### LCBL-100-12, LCBL-200-12

100 or 200 feet of 12-gauge  
low-voltage wiring

# AXIS

A slender form and a soft black finish give this luminaire a contemporary style that fits almost anywhere.

DCP-STKXX




**Easy-Select Button**  
No app needed, press to choose from 7 colors or tunable white tones (2200K–4000K).



| Model     | Size | Watts | Delivered lumens | CRI | Color °T                 | Voltage |
|-----------|------|-------|------------------|-----|--------------------------|---------|
| DCP-STK20 | 20"  | 6 W   | 310 lm           | 80  | RGB + 2200 K<br>- 4000 K | 24 VDC  |
| DCP-STK50 | 50"  | 12 W  | 565 lm           |     |                          |         |



## DCP-STK20 / DCP-STK50

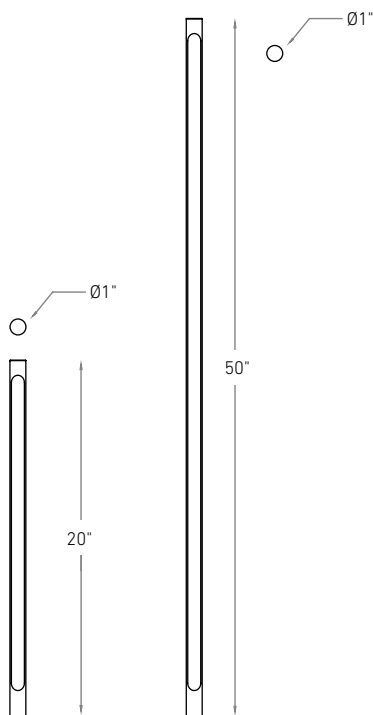

### Specifications

Full color spectrum  
2200K - 4000K in pure whites  
120° beam angle  
Dimmable through the DALI Connect app and the Clicc remote (DCP-RMCT)  
5-year warranty

### Note

Add the DALI Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

### Finish

● **BK** Black

### Smart transformers

#### DCP-MTR60

60W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

#### DCP-MTR300

300W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

### Download the DALI Connect app

Create groups  
Set schedules  
Remote access\*  
Compatible with Google Assistant and Amazon Alexa\*



\* Core needed

### Accessories

#### DCP-RMCT

Smart remote

#### DCP-PTR36

Plug-in driver

#### DCP-ACC-MS12

12" metal ground stake

#### DCP-ACC-MS06

6" metal ground stake

#### DCP-ACC-MB

Mounting bracket

#### LCBL-50-16, LCBL-100-14

50 or 100 feet of 14-gauge  
low-voltage wiring

#### LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge  
low-voltage wiring

#### LCBL-100-12, LCBL-200-12

100 or 200 feet of 12-gauge  
low-voltage wiring

# ACUTE


With its 45-degree angled head, this modern classic provides calming and practical downward lighting, casting unique highlights in gardens and effortlessly illuminating pathways.



| Model      | Size | Watts | Delivered lumens | CRI | Color °T                 | Voltage |
|------------|------|-------|------------------|-----|--------------------------|---------|
| DCP-45HP20 | 20"  | 7 W   | 600 lm           | 80  | RGB + 2200 K<br>- 4000 K | 24 VDC  |



## DCP-45HP20

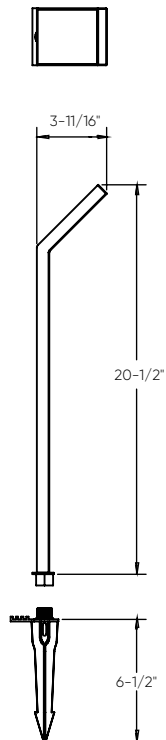

### Specifications

Full color spectrum  
2200K - 4000K in pure whites  
45° beam angle  
Dimmable through the DALI Connect app  
and the Clicc remote (DCP-RMCT)  
5-year warranty

### Note

Add the DALI Connect Pro Core transformer  
for even greater flexibility: voice control,  
remote access, expanded mesh network.

### Finish

● **BK** Black

### Smart transformers

#### DCP-MTR60

60W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

#### DCP-MTR300

300W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

### Download the DALI Connect app

Create groups  
Set schedules  
Remote access\*  
Compatible with Google  
Assistant and Amazon Alexa\*



\* Core needed

### Accessories

#### DCP-RMCT

Smart remote

#### DCP-PTR36

Plug-in driver

#### DCP-ACC-MS12

12" metal ground stake

#### DCP-ACC-MS06

6" metal ground stake

#### LCBL-50-16, LCBL-100-16

50 or 100 feet of 16-gauge  
low-voltage wiring

#### LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge  
low-voltage wiring

#### LCBL-100-12, LCBL-200-12

100 or 200 feet of 12-gauge  
low-voltage wiring

NEW


# HORIZON MAX

Horizon Max is the big brother to our original Horizon, delivering significantly higher lumen output while maintaining the same build quality and adjustability. Constructed from high-strength aluminum alloy, it features a wide 120° beam angle and can be wall-mounted or staked in the ground. The wall plug can also be cut for direct 120V hardwiring.



| Model      | Size | Watts | Delivered lumens | CRI | Color °T              | Voltage |
|------------|------|-------|------------------|-----|-----------------------|---------|
| DCP-FLD100 | 14"  | 100 W | 9800 lm          | 80  | RGB + 2200 K - 4000 K | 120 V   |

## DCP-FLD100

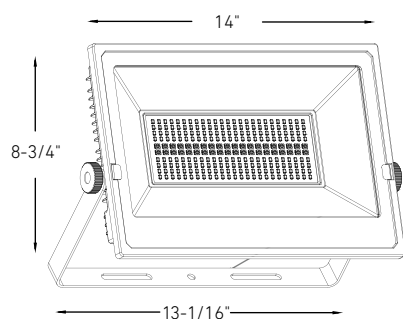

### Specifications

Full color spectrum  
2200K - 4000K in pure whites  
Can be wall mounted  
120° beam angle  
UL 153 Convertible (plug-in or hardwired installation)  
Dimmable through the DALI Connect app and the Click remote (DCP-RMCT)  
5-year warranty

### Note

Add the DALI Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

### Finish

● **BK** Black

### Download the DALI Connect app

Create groups  
Set schedules  
Remote access\*  
Compatible with Google Assistant and Amazon Alexa\*



\* Core needed

### Accessories

**DCP-RMCT**  
Smart remote

# HORIZON

Made of high strength aluminum alloy with adjustable precision. Incredibly bright with a 120° degree beam angle, it can be wall mounted or staked in the ground.




DCP-FLD30



| Model     | Size | Watts | Delivered lumens | CRI | Color °T              | Voltage |
|-----------|------|-------|------------------|-----|-----------------------|---------|
| DCP-FLD30 | 7"   | 30 W  | 3000 lm          | 80  | RGB + 2200 K - 4000 K | 24 VDC  |

## DCP-FLD30

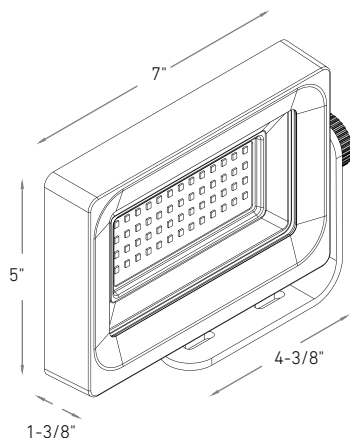

### Specifications

Full color spectrum  
2200K - 4000K in pure whites  
Can be wall mounted  
120° beam angle  
Dimmable through the DALS Connect app  
and the Clicc remote (DCP-RMCT)  
5-year warranty

#### Note

Add the DALS Connect Pro Core transformer  
for even greater flexibility: voice control,  
remote access, expanded mesh network.

#### Finish

● **BK** Black

### Smart transformers

#### DCP-MTR60

60W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

#### DCP-MTR300

300W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

#### Download the DALS Connect app

Create groups  
Set schedules  
Remote access\*  
Compatible with Google  
Assistant and Amazon Alexa\*



\* Core needed

### Accessories

#### DCP-RMCT

Smart remote

#### DCP-PTR36

Plug-in driver

#### DCP-ACC-MS12

12" metal ground stake

#### DCP-ACC-MS06

6" metal ground stake

#### DCP-ACC-MB

Mounting bracket

#### LCBL-50-16, LCBL-100-16

50 or 100 feet of 16-gauge  
low-voltage wiring

#### LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge  
low-voltage wiring

#### LCBL-100-12, LCBL-200-12


100 or 200 feet of 12-gauge  
low-voltage wiring

# MASON

With its minimalistic form, refined casing, and understated presence, Mason integrates effortlessly into any architectural style. Its clean lines and balanced proportions allow it to complement a wide range of exteriors, adding sophistication without distraction.



DCP-BRK12

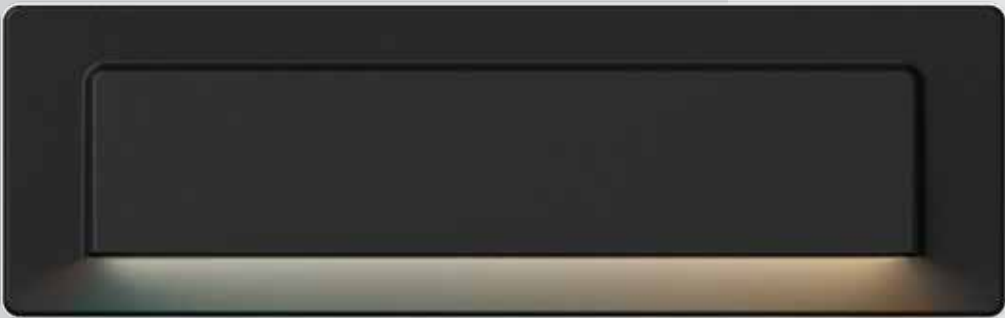


**Easy-Select Button**  
No app needed, press to choose from 7 colors  
or tunable white tones (2200K–4000K).

| Model     | Size | Watts | Delivered lumens | CRI | Color °T              | Voltage |
|-----------|------|-------|------------------|-----|-----------------------|---------|
| DCP-BRK12 | 12"  | 8 W   | 280 lm           | 80  | RGB + 2200 K - 4000 K | 24 VDC  |



## DCP-BRK12

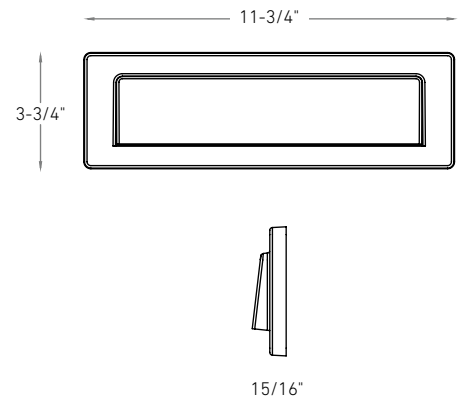

## Specifications

Full color spectrum  
2200K - 4000K in pure whites  
Can be recessed or surface mounted  
40° beam angle  
Dimmable through the DALI Connect app and the Click remote (DCP-RMCT)  
Installs into a standard electrical junction box  
5-year warranty

## Note

Add the DALI Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

## Finish

● **BK** Black

## Smart transformers

### DCP-MTR60

60W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

### DCP-MTR300

300W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

## Download the DALI Connect app

Create groups  
Set schedules  
Remote access\*  
Compatible with Google Assistant and Amazon Alexa\*



\* Core needed

## Accessories

### DCP-RMCT

Smart remote

### DCP-PTR36

Plug-in driver

### LCBL-50-16, LCBL-100-16

50 or 100 feet of 16-gauge  
low-voltage wiring

### LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge  
low-voltage wiring

### LCBL-100-12, LCBL-200-12

100 or 200 feet of 12-gauge  
low-voltage wiring

# CONTOUR PRO

The Contour's compact size ensures a discreet and unobtrusive appearance while providing ample illumination for small to medium-sized areas. Its sleek and modern design seamlessly integrates into hardscape elements such as walls, steps, and patios. Crafted with high-quality materials, this fixture is built to withstand the elements, ensuring long-lasting durability and performance.



DCP-LHS12




**Easy-Select Button**  
No app needed, press to choose from 7 colors or tunable white tones (2200K–4000K).

| Model     | Size | Watts | Delivered lumens | CRI | Color °T              | Voltage         |
|-----------|------|-------|------------------|-----|-----------------------|-----------------|
| DCP-LHS12 | 12"  | 5 W   | 200 lm           | 80  | RGB + 2200 K - 4000 K | 12 VAC / 24 VDC |





## DCP-LHS12

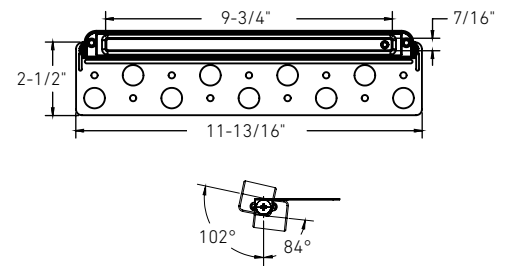

## Specifications

Full color spectrum  
2200K - 4000K in pure whites  
Can be recessed or surface mounted  
Can be mounted to wood or concrete  
95° beam angle  
Dimmable through the DALI Connect app  
and the Clicc remote (DCP-RMCT)  
5-year warranty

## Note

Add the DALI Connect Pro Core transformer  
for even greater flexibility: voice control,  
remote access, expanded mesh network.

## Finish

● **BK** Black

## Smart transformers

### DCP-MTR60

60W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

### DCP-MTR300

300W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

## Download the DALI Connect app

Create groups  
Set schedules  
Remote access\*  
Compatible with Google  
Assistant and Amazon Alexa\*



\* Core needed

## Accessories

### DCP-RMCT

Smart remote

### DCP-PTR36

Plug-in driver

### LCBL-50-16, LCBL-100-16

50 or 100 feet of 16-gauge  
low-voltage wiring

### LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge  
low-voltage wiring

### LCBL-100-12, LCBL-200-12

100 or 200 feet of 12-gauge  
low-voltage wiring

# FLEX


Transform any space with ease using our 5-meter smart neon tape light, seamlessly blending vibrant colors and dynamic lighting effects to create an ambiance that suits your mood and style.



DCP-NFTAP5M

**Easy-Select Button**  
No app needed, press to choose from 7 colors or tunable white tones (2200K–4000K).

| Model       | Size      | Watts | Delivered lumens | CRI | Color °T             | Voltage |
|-------------|-----------|-------|------------------|-----|----------------------|---------|
| DCP-NFTAP5M | 5m (196") | 24 W  | 1200 lm          | 80  | RGB + 2200 K- 4000 K | 24 VDC  |

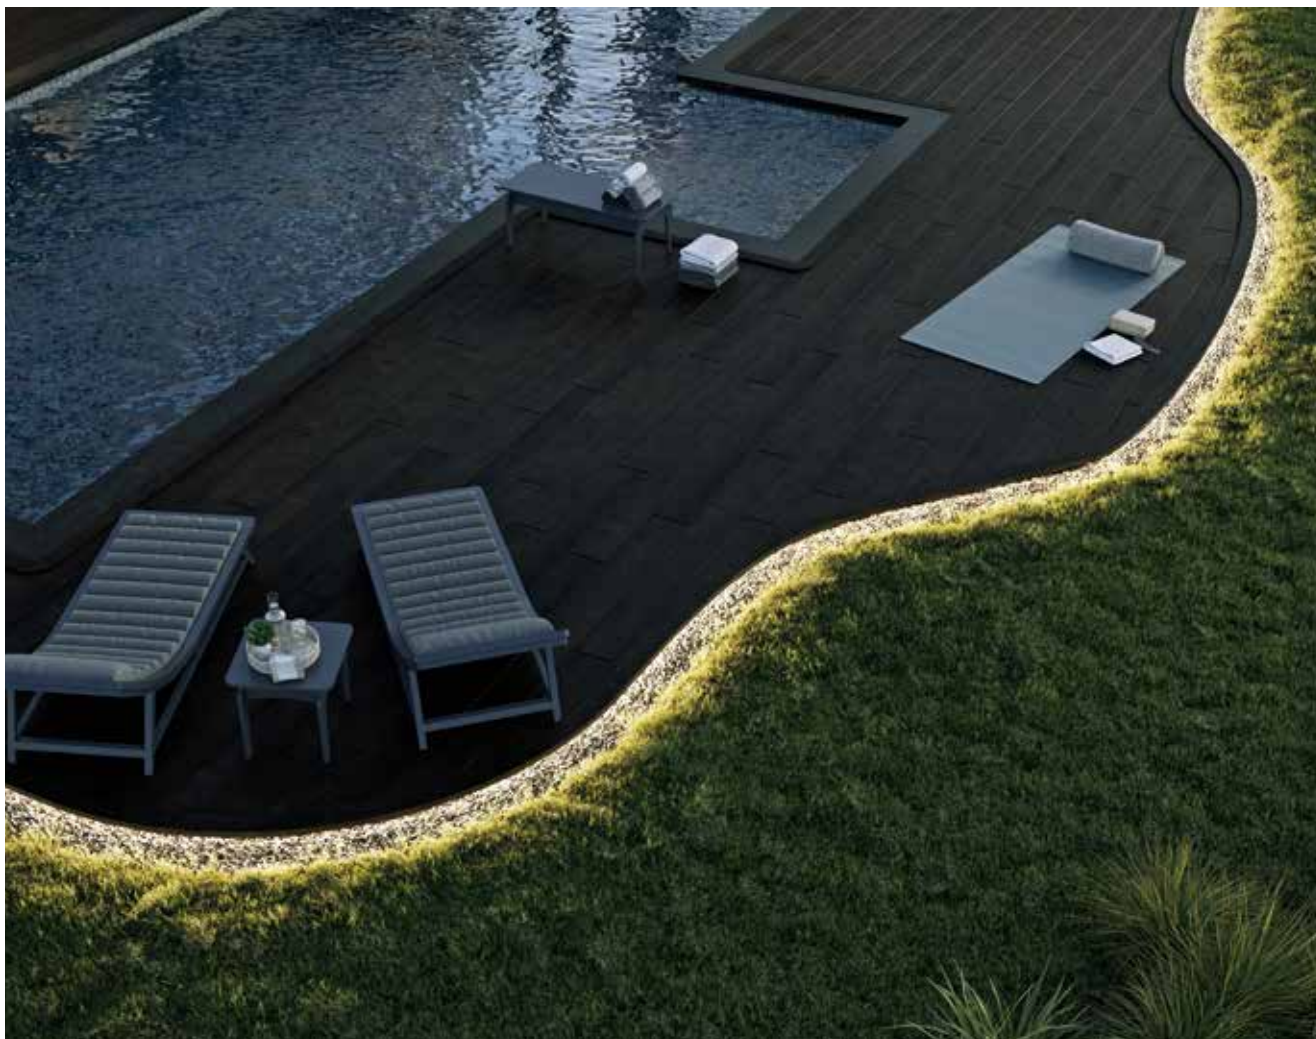

## Specifications

Full color spectrum  
 2200K - 4000K in pure whites  
 Seamless light emission with zero hotspots  
 Flexible and bendable laterally only  
 Can be cut every 2.5 inches  
 (cannot be reconnected)  
 36W plug-in transformer included  
 Includes a wired controller with smart  
 button for CCT selection, color customization  
 and on/off control  
 Dimmable through the DALI Connect app and  
 the Cllick remote (DCP-RMCT)  
 5-year warranty

## Note

Add the DALI Connect Pro Core transformer  
 or the Pro Hub for even greater flexibility:  
 voice control, remote access, expanded mesh  
 network.

## Finish

○ **WH** White

## Accessories

### DCP-RMCT

Smart remote

### DCP-ACC-NFEC

Silicone end cap for Neon Flex Tape

### DCP-ACC-NFCH

3.3-foot U-channel for Neon Flex Tape,  
 available in aluminum finish


### DCP-ACC-NFRE6FT

6-foot recessed extrusion for Neon Flex Tape,  
 available in black or aluminum finish

## Download the DALI Connect app

Create groups  
 Set schedules  
 Remote access\*  
 Compatible with Google  
 Assistant and Amazon Alexa\*

## DCP-NFTAP5M

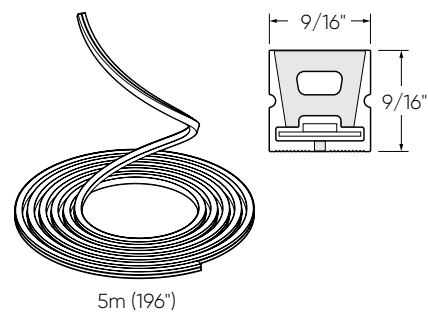

\* Pro Core or the Pro Hub needed

# ORION

Garden parties, birthdays or a relaxing dinner. Create the perfect atmosphere with the numerous lighting effects provided by the Orion string light.



DCP-STG48



**Easy-Select Button**  
No app needed, press to choose from 7 colors or tunable white tones (2200K–4000K).



| Model     | Size | Watts | Delivered lumens | CRI | Color °T              | Voltage |
|-----------|------|-------|------------------|-----|-----------------------|---------|
| DCP-STG48 | 48'  | 12 W  | 1200 lm          | 80  | RGB + 2200 K - 4000 K | 24 VDC  |





## Specifications

Full color spectrum  
 2200K - 4000K in pure whites  
 24W plug-in driver included  
 One 24W transformer can power two string lights daisy chained together  
 15 bulbs per string  
 On-wire remote control  
 Preset animations  
 Dimmable through the DALS Connect app  
 5-year warranty

## Note

Add the DALS Connect Pro Core transformer or the Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network.

## Finish

● **BK** Black

## Accessories

**DCP-STGACCLB**

Bulb replacement

**DCP-STGACPCB**

PCB replacement


## Download the DALS Connect app

Create groups  
 Set schedules  
 Remote access\*  
 Compatible with Google Assistant and Amazon Alexa\*



\*Pro Core or the Pro Hub needed

## DCP-STG48

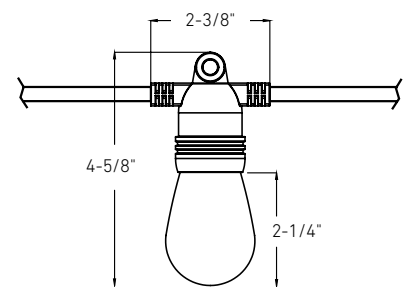

# KAYU

Sprinkle your landscape with subtle touches of light. The Kayu series, a harmonious and organic fixture easily creates a welcoming atmosphere.



DCP-RKXX




### Easy-Select Button

No app needed, press to choose from 7 colors or tunable white tones (2200K-4000K).




| Model    | Size | Watts | Delivered lumens | CRI | Color °T              | Voltage |
|----------|------|-------|------------------|-----|-----------------------|---------|
| DCP-RK10 | 10"  | 5 W   | 400 lm           | 80  | RGB + 2200 K - 4000 K | 24 VDC  |
| DCP-RK18 | 18"  | 7 W   | 600 lm           |     |                       |         |

### DCP-RK10



### DCP-RK18

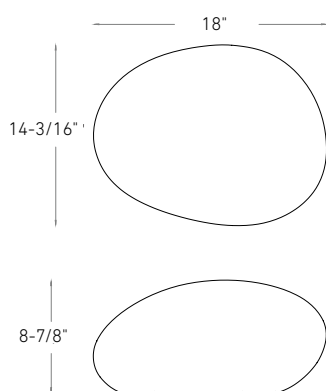

### Specifications

Full color spectrum  
2200K - 4000K in pure whites  
Dimmable through the DALI Connect app  
and the Clicc remote (DCP-RMCT)  
5-year warranty

#### Note

Add the DALI Connect Pro Core transformer  
for even greater flexibility: voice control,  
remote access, expanded mesh network.

#### Finish

○ **WH** White

### Smart transformers

#### DCP-MTR60

60W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

#### DCP-MTR300

300W, 120 VAC 50/60Hz input, 24 VDC output  
low-voltage smart magnetic transformer

#### Download the DALI Connect app

Create groups  
Set schedules  
Remote access\*  
Compatible with Google  
Assistant and Amazon Alexa\*



\* Core needed

### Accessories

#### DCP-RMCT

Smart remote

#### DCP-PTR36

Plug-in driver

#### DCP-ACC-MS12

12" metal ground stake

#### DCP-ACC-MS06

6" metal ground stake

#### LCBL-50-16, LCBL-100-16

50 or 100 feet of 16-gauge  
low-voltage wiring

#### LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge  
low-voltage wiring

#### LCBL-100-12, LCBL-200-12

100 or 200 feet of 12-gauge  
low-voltage wiring

# CORE

The heart of your connected landscape system. The Core is a weatherproof smart hub with a built-in driver, engineered to unlock the full potential of your outdoor lighting.



DCP-MTR






## Model

### DCP-MTR60

60W low-voltage smart magnetic transformer



## Specifications

Input 120 VAC, 50/60Hz, Output 24 VDC  
Integrated junction box with multiple knockouts  
Circuit breakers protect both the driver and LED load  
Black powder-coated metal enclosure  
Rated for dry and wet locations  
Encapsulated EI-core magnetic transformer  
Fanless design with free-air convection cooling  
Operating temperature -20°C to 70°C  
Vertical mounting with keyholes at the top  
Power factor 0.9  
Thermal class B (130°C)  
Supports Wi-Fi and BLE Mesh  
Works with the DALS Connect app  
Compatible with Google Assistant and Amazon Alexa


## Download the DALS Connect app

Create groups  
Set schedules  
Remote access  
Compatible with Google Assistant and Amazon Alexa



### DCP-MTR300

300W low-voltage smart magnetic transformer

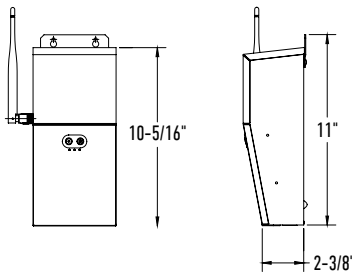

## Finish

● BK Black





# LANDSCAPE ACCESSORIES

| Model                                                                                                                                                                                                                   |                                                                                     | Finish | Specification                                                                                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|----------------------------------------------------------------------------------------------------------------------------|
| <b>LAN-ACC-MS</b><br> WET                                                                                                              |    | Black  | <ul style="list-style-type: none"> <li>• 6-3/4 in. metal replacement stake for spotlights</li> </ul>                       |
| <b>LAN-ACC-PS</b><br> WET                                                                                                              |    | Black  | <ul style="list-style-type: none"> <li>• 7-1/4 in. plastic replacement stake for path lights and bollards</li> </ul>       |
| <b>LCBL-50-16</b><br><b>LCBL-100-16</b><br><b>LCBL-50-14</b><br><b>LCBL-100-14</b><br><b>LCBL-100-12</b><br><b>LCBL-200-12</b><br> WET |    | Black  | <ul style="list-style-type: none"> <li>• 16, 14, and 12 gauge low-voltage wire in 50, 100, and 200 ft. lengths.</li> </ul> |
| <b>LSP-EXT04</b><br> WET                                                                                                             |  | Black  | <ul style="list-style-type: none"> <li>• 4 in. extension arm</li> </ul>                                                    |
| <b>LSP-WM</b><br> WET                                                                                                                |  | Black  | <ul style="list-style-type: none"> <li>• Spotlight wall mount adapter</li> </ul>                                           |
| <b>LSP3-ACCLN</b><br><b>LSP4-ACCLN</b><br> WET                                                                                       |  | Clear  | <ul style="list-style-type: none"> <li>• 20° and 40° interchangeable lenses for LSP3-CC and LSP3-CC spot lights</li> </ul> |
| <b>LSQP-ACC-PS</b><br> WET                                                                                                           |  | Black  | <ul style="list-style-type: none"> <li>• 7-1/4 in. plastic replacement stake for LSQP-CC path light</li> </ul>             |

# SMART LANDSCAPE ACCESSORIES

| Model                                                                                                                                                                                                                   |                                                                                     | Finish        | Specification                                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DCP-ACC-MB</b><br> WET                                                                                                              |    | Black         | <ul style="list-style-type: none"> <li>• Mounting bracket for smart landscape lights</li> </ul>                                                       |
| <b>DCP-ACC-MS06</b><br><b>DCP-ACC-MS12</b><br> WET                                                                                     |    | Black         | <ul style="list-style-type: none"> <li>• 6 and 12 in. metal replacement ground stakes for smart landscape lights</li> </ul>                           |
| <b>LCBL-50-16</b><br><b>LCBL-100-16</b><br><b>LCBL-50-14</b><br><b>LCBL-100-14</b><br><b>LCBL-100-12</b><br><b>LCBL-200-12</b><br> WET |    | Black         | <ul style="list-style-type: none"> <li>• 16, 14, and 12 gauge low-voltage wire in 50, 100, and 200 ft. lengths.</li> </ul>                            |
| <b>DCP-PTR36</b><br> WET                                                                                                             |  | Black         | <ul style="list-style-type: none"> <li>• 36W plug-in driver for smart landscape lights</li> </ul>                                                     |
| <b>DCP-SPTACCLENS</b><br> WET                                                                                                        |  | Frosted white | <ul style="list-style-type: none"> <li>• 120° frosted lens for DCP-SPT6 spot light</li> </ul>                                                         |
| <b>DCP-SPTTEXT14</b><br> WET                                                                                                         |  | Black         | <ul style="list-style-type: none"> <li>• 14 in. extension tube for DCP-SPT6 spot light</li> </ul>                                                     |
| <b>DCP-STGACCBLEB</b><br><b>DCP-STGACCPCB</b><br> WET                                                                                |  | White         | <ul style="list-style-type: none"> <li>• Replacement bulb for DCP-STG48 string light</li> <li>• Replacement PCB for DCP-STG48 string light</li> </ul> |

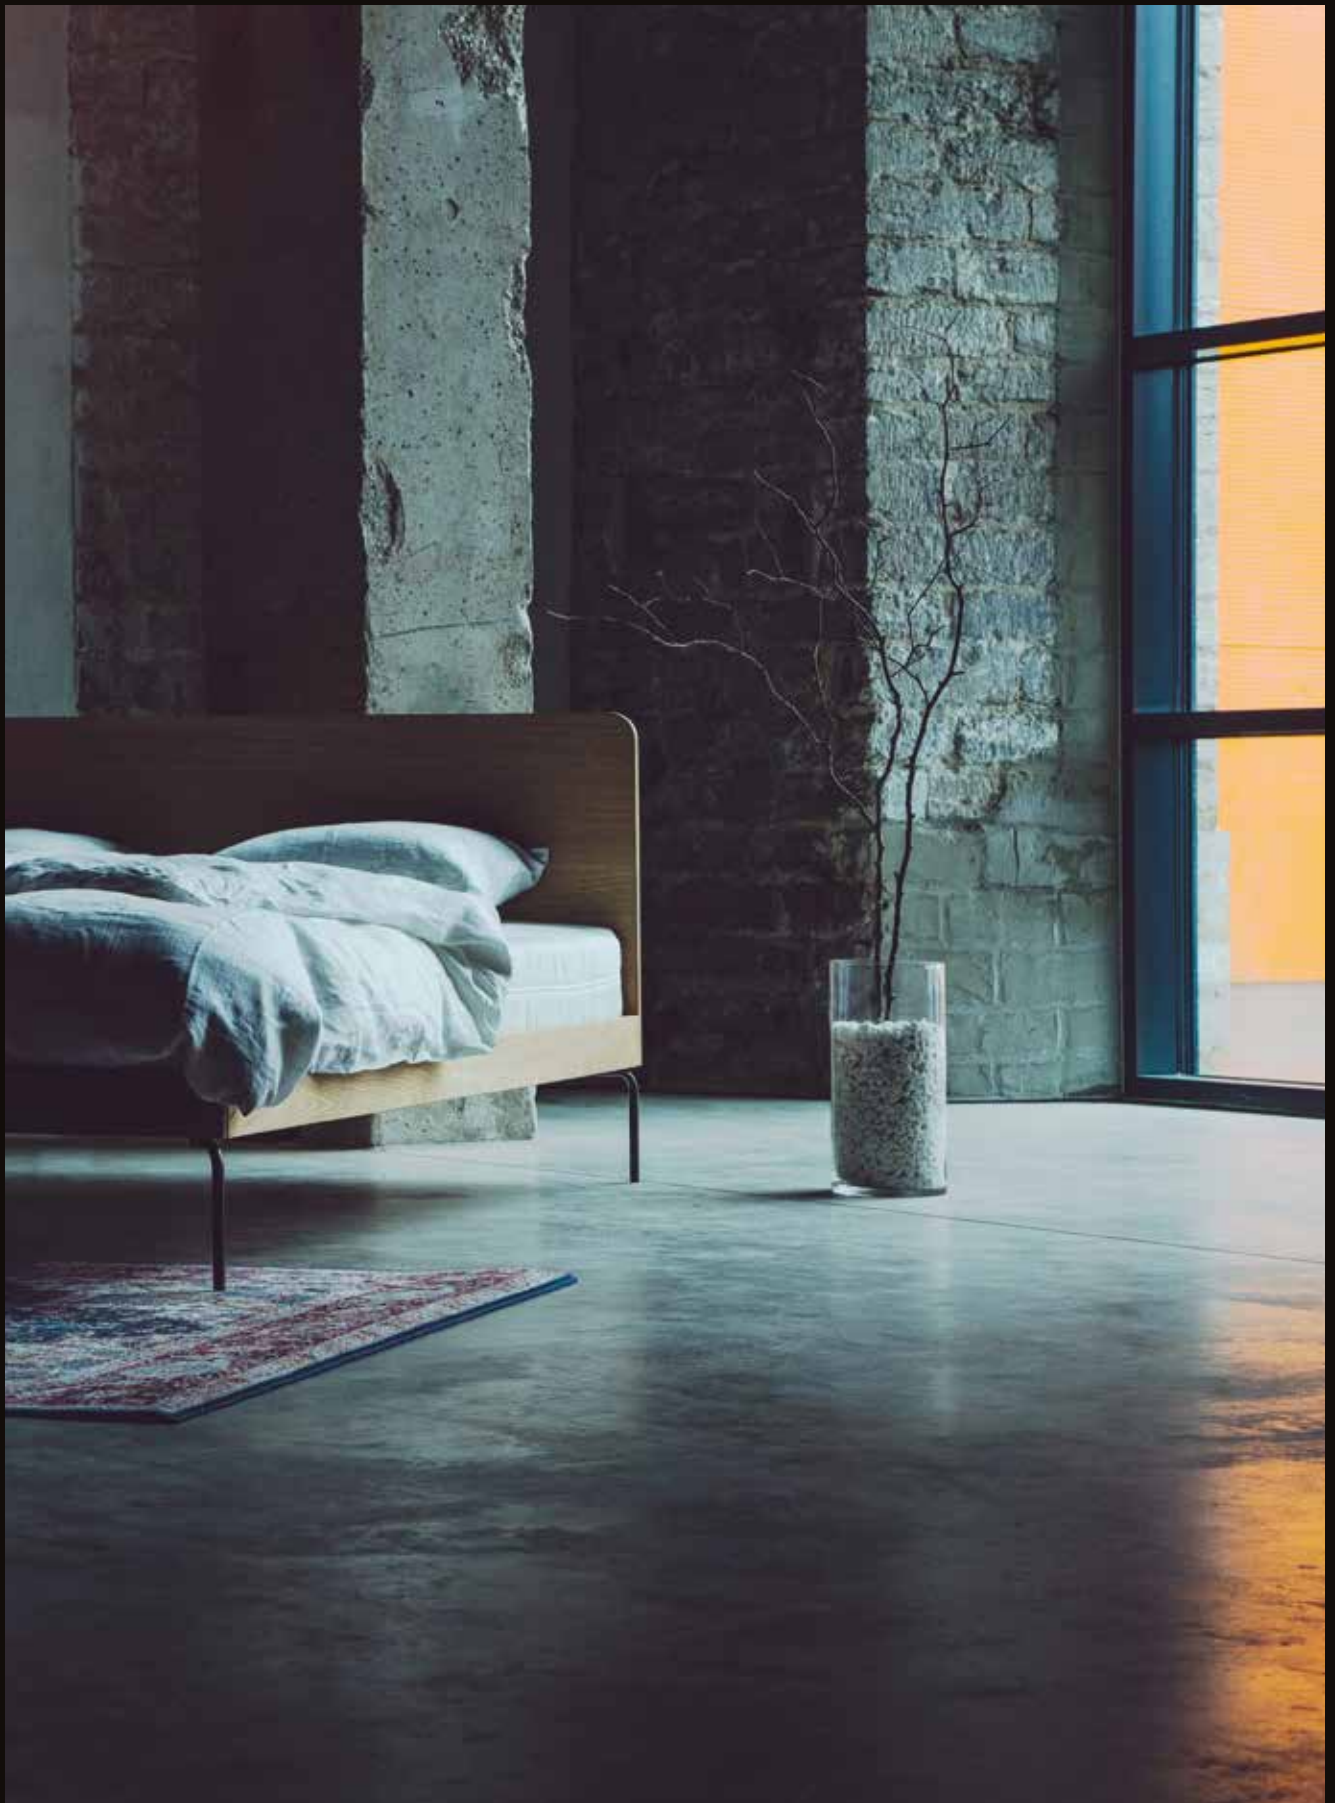

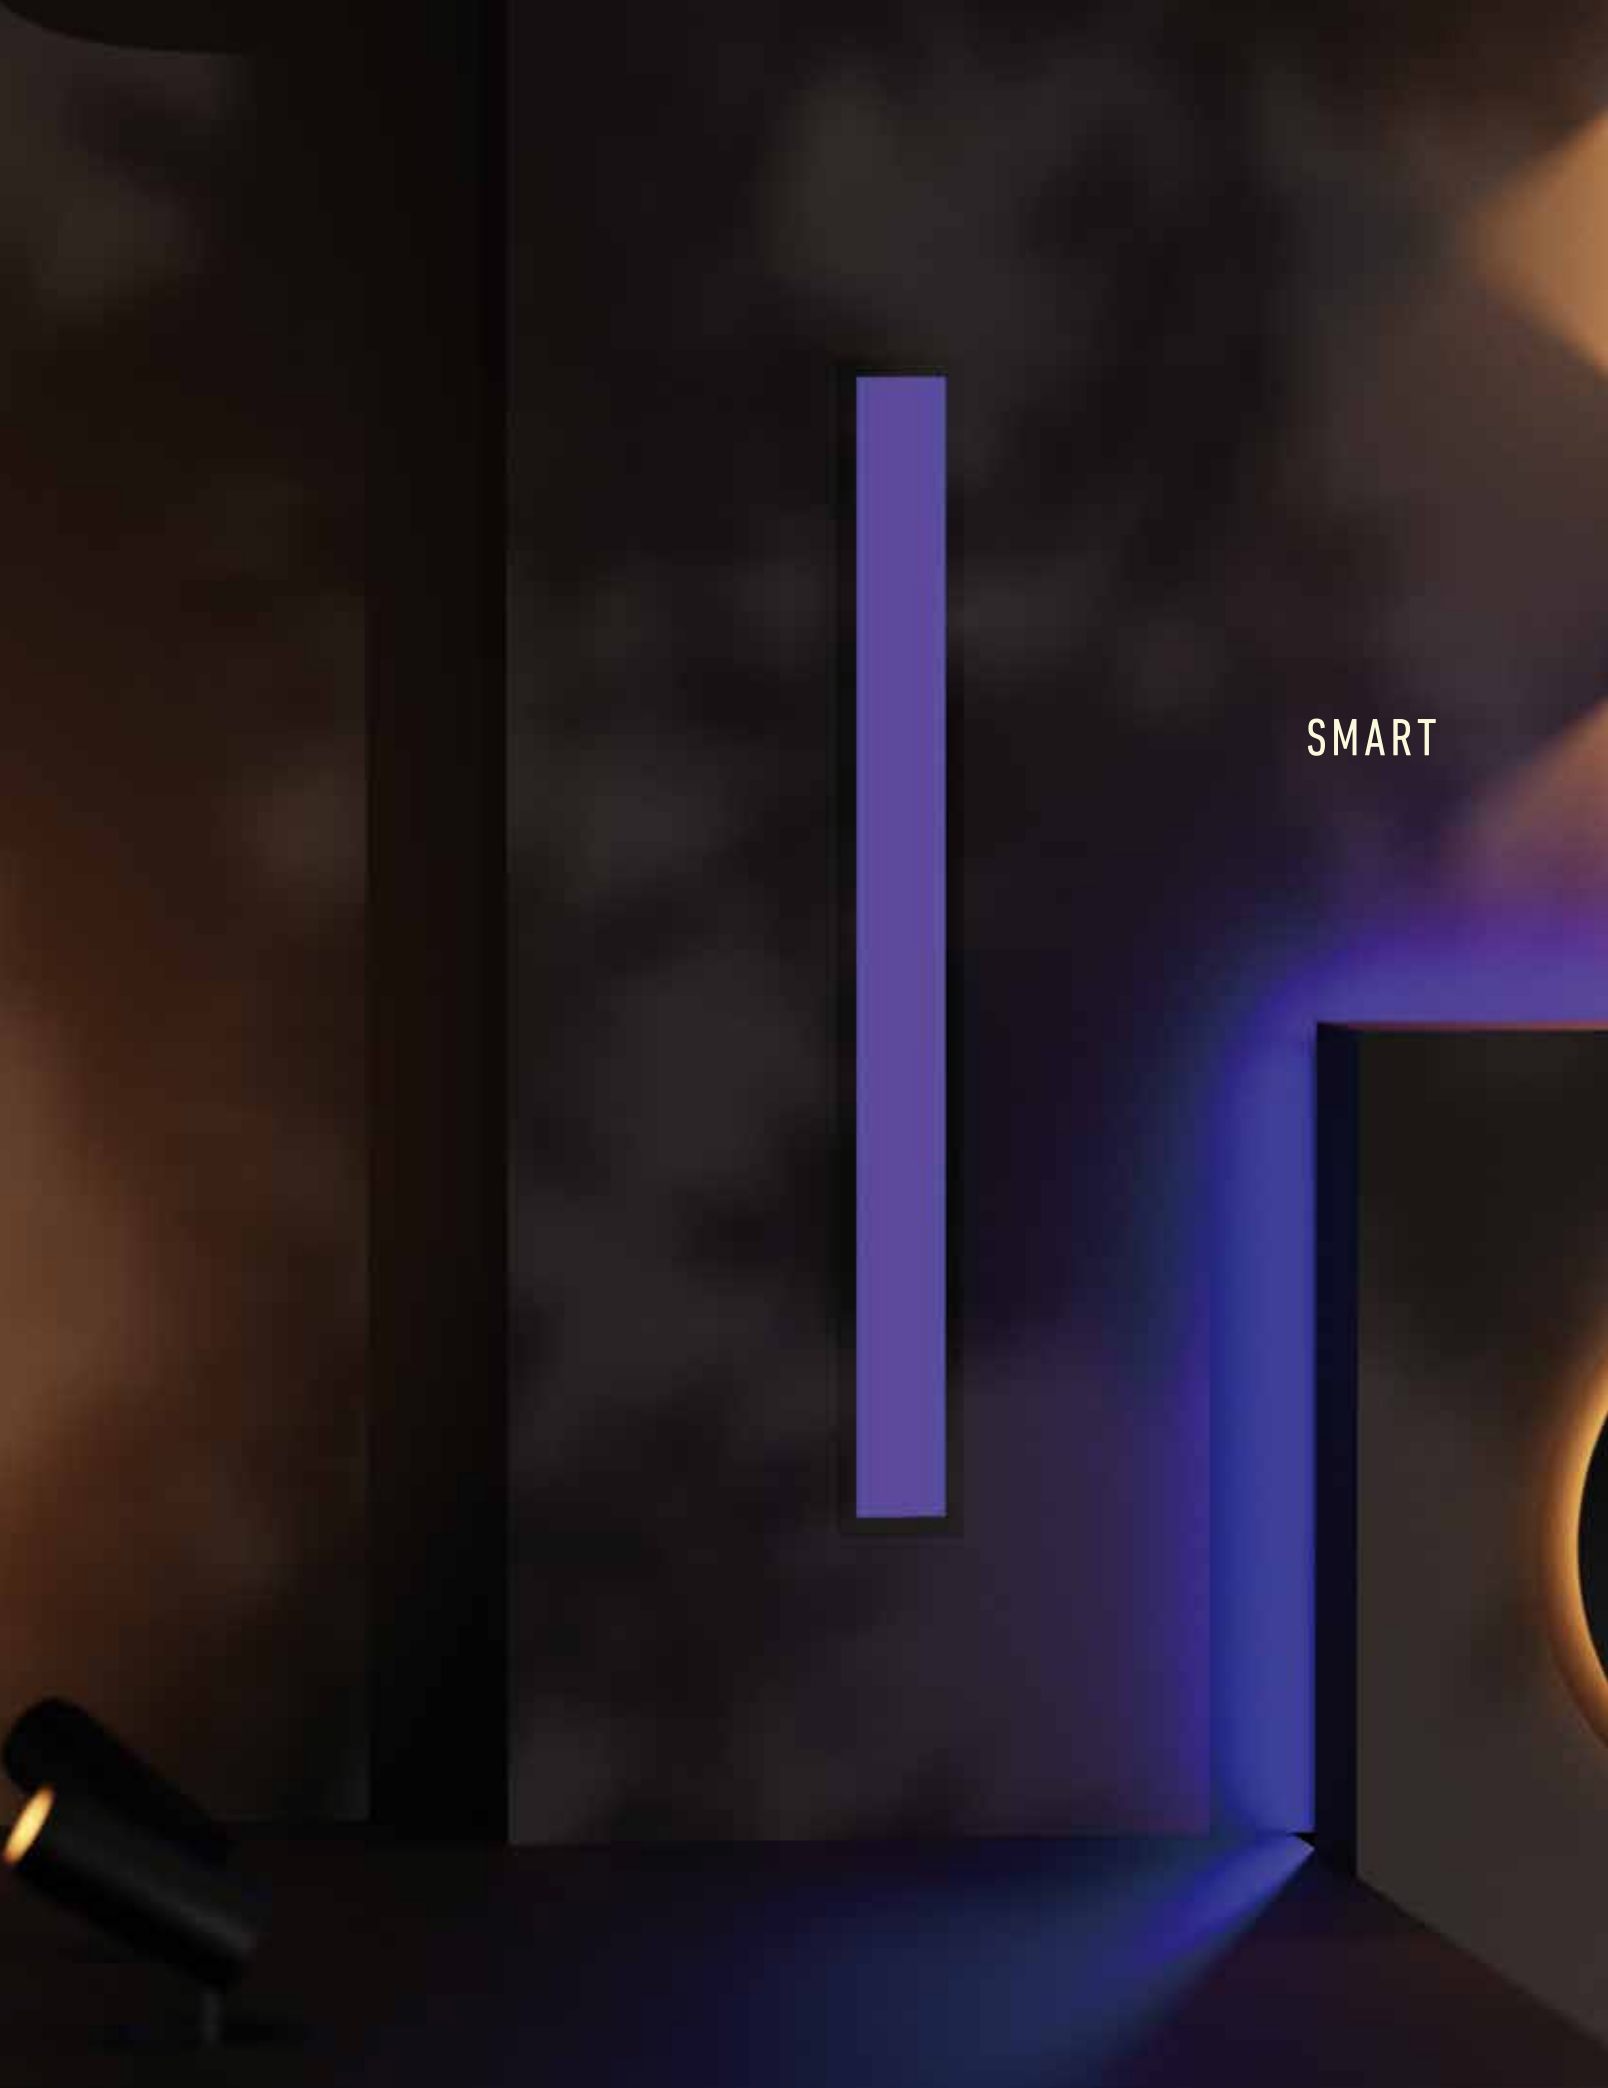An abstract, dark background with a textured, smoky appearance. A vertical purple rectangular bar is positioned in the upper center. In the bottom left corner, a spotlight fixture is visible, casting a beam of light. The word "SMART" is written in white, uppercase letters on the right side of the image.

SMART



273

**CONNECTION  
GUIDE**



276

**HUB**  
DCP-HUBV2



278

**CLICC**  
DCP-RMCT



280

**DIMMER SWITCH**  
SM-DIMSW



282

**BULBS**  
DCP-BLBA21  
DCP-BLBBR30



284

**GLOW**  
DCP-TAP10FT  
DCP-TAP20FT  
DCP-TAP50FT



158

**RADIANCE**  
DCP-FMM12



58

**PIVOT**  
DCP-FGM4



54

**REVOLVE**  
DCP-GBR35



42

**ETCH**  
DCP-DDP4  
DCP-DDP6



64

**EXCEL**  
DCP-PNL4  
DCP-PNL6



48

**BOULEVARD**  
DCP-LNR24  
DCP-LNR48



124

**BOULEVARD  
PENDANT**  
DCP-LNPD48



286

**FRAME**  
DCP-CGWS



## One App One Smart System

DALS launched its first smart home products in 2017 and has sold over 450,000 devices as of December 2025, demonstrating our expertise in smart lighting applications. In 2023, DALS expanded its offerings with the introduction of the DALS Connect PRO product line. This assortment leverages Bluetooth Mesh technology, enabling large

networks of devices and delivering advanced features such as scalable connectivity, centralized control via the DALS Connect App, and cloud-enabled voice integration. DALS Connect PRO is designed for professional installations, providing reliable, flexible, and efficient smart lighting control for both residential and commercial projects.

## There are many benefits to smart lighting



### Experience

White color temperature and a wide array of fun colors are easily changeable, allowing you a multitude of lighting options for comfort.



### Save

Save on energy and increase your home's security by using schedules or remotely turning on/off the lights when no one is home.



### Control

Easily control your lighting with smart switches, your phone, or a voice assistant for even more convenience.



### Create

With the DALS Connect app, you can program your own lighting scenes for specific conditions and tasks, such as watching movies, daytime or nighttime reading, parties, and much more. Within a scene, you can change the brightness, color temperature, and even use different hues.



# Why Choose DALS Connect PRO?



## Higher number of devices – independent network

DALS Connect PRO uses Bluetooth-mesh technology. Each device on the mesh network can relay commands to another device, allowing many-to-many communication via Bluetooth Low Energy. This lets you control large groups of products using your smartphone or tablet, even without an internet connection

## DALS Connect PRO Hub - Connect, Control, and Scale Your Lighting

You can add the DALS Connect PRO hub to connect up to 128 products to the cloud via a single connection. For projects with over 200 devices, multiple hubs can be used. Cloud connectivity enables voice control via Google Home, Amazon Alexa, and remote access.



**GOOD  
TO KNOW!**



**Bluetooth Mesh Technology.** DALS Connect PRO products use Bluetooth Mesh technology to deliver reliable range and seamless interconnectivity for smart lighting. Each device on the mesh network can relay commands to others, providing robust control for both small and large installations.



**Centralized Control with the DALS Connect App.** The DALS Connect App provides centralized control of all PRO devices. You can manage individual fixtures or entire groups, either locally or via the cloud, simplifying setup and adjustments while keeping all devices synchronized.



## Which DALS Connect PRO Solution is Right for You?

The DALS Connect App provides centralized control for your smart fixtures with Bluetooth-mesh connectivity. Whether managing a single group of fixtures or a large project, DALS Connect PRO and the PRO Hub offer flexible, scalable, and secure solutions

*\*The actual maximum number of Bluetooth devices supported in a mesh network is much higher (32,767), but achieving these numbers would require professional network installations and mesh network segmentation.*

|                                                                                                          | DALS<br>Connect PRO                                                                 | DALS<br>Connect PRO + Hub                                                           |
|----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                                                          |  |  |
| Uses the DALS Connect App                                                                                | •                                                                                   | •                                                                                   |
| Create groups                                                                                            | •                                                                                   | •                                                                                   |
| Operating range within the controller's line of sight<br>(Wi-Fi router or another Bluetooth-mesh device) | 50 FT                                                                               | 50 FT                                                                               |
| Number of supported smart devices                                                                        | 100*                                                                                | 200                                                                                 |
| Can be controlled locally (without internet)                                                             | •                                                                                   | •                                                                                   |
| Requires multiple access points to extend the range                                                      |                                                                                     |                                                                                     |
| Secure connection                                                                                        | •                                                                                   | •                                                                                   |
| Can be used with voice-controlled assistant                                                              |                                                                                     | •                                                                                   |



**DALS Connect PRO Hub.** You can add the DALS Connect PRO Hub to connect up to 200 devices to the cloud via a single internet connection. Bluetooth Mesh technology eliminates the need for additional hubs, even in larger projects. Cloud access enables voice control through platforms like Google Home and Amazon Alexa, as well as remote management from anywhere.



**Reliable, Scalable, and Flexible.** DALS Connect PRO is designed for professional installations requiring maximum reliability and scalability. Bluetooth Mesh ensures strong connectivity across large areas, while the system can easily expand to meet project needs, providing flexible, secure, and efficient smart lighting control.

## PRO HUB

Unlock the full power of DALS Connect Pro! Take your smart lighting to the next level with the DALS Connect Pro Hub, the heart and brain of your lighting ecosystem. While Bluetooth lets you enjoy the basics, the Pro Hub opens the door to the complete smart experience: control your lights from anywhere in the world, create seamless automation and enjoy immersive surround lighting.

Simple to set up, the Pro Hub connects to your router and brings your entire DALS Connect Pro collection to life. Add accessories, integrate your favorite voice assistant, and craft a lighting experience that truly responds to you — anytime, anywhere.



DRY



DCP-HUBV2



| Model     | Size | Wi-Fi | Ethernet | Bluetooth | Number of supported devices | Alexa & Google Assistant compatible | Voltage |
|-----------|------|-------|----------|-----------|-----------------------------|-------------------------------------|---------|
| DCP-HUBV2 | 4"   | ✓     | ✓        | ✓         | 200*                        | ✓                                   | 120 V   |

\*Per Hub



## Specifications

Indoor use only  
 Control with the DALS Connect app  
 Number of supported smart devices per hub: 200  
 Can be powered through any USB port with power  
 Works with DALS Connect PRO devices  
 Secure connection  
 Enables voice control assistants  
 Supports Wi-Fi and BLE Mesh protocols  
 Supports a hardwired internet connection using an Ethernet cable  
 5-year warranty

## Finish

☐ **WH** White



## Note

For remote access a secured 2.4 GHz wireless network or an ethernet cable (included) is required.

## Download the DALS Connect app



## DCP-HUBV2



# CLICC

Upgrade your home automation with the Click smart remote and enjoy the perfect combination of local control and app integration for a seamlessly connected smart home experience. Effortlessly integrate your DALS Connect Pro products for centralized control over multiple devices. The remote is easily detachable from its wall plate, allowing you to take it anywhere in your home. Adjust color temperatures, dim the lights, or select vibrant hues, all with ease from this versatile remote.




DCP-RMCT



| Model    | Size   | Programmable | Wall adapter | Number of supported devices | Battery |
|----------|--------|--------------|--------------|-----------------------------|---------|
| DCP-RMCT | 2 5/8" | √            | √            | 100                         | CR2032  |

## DCP-RMCT

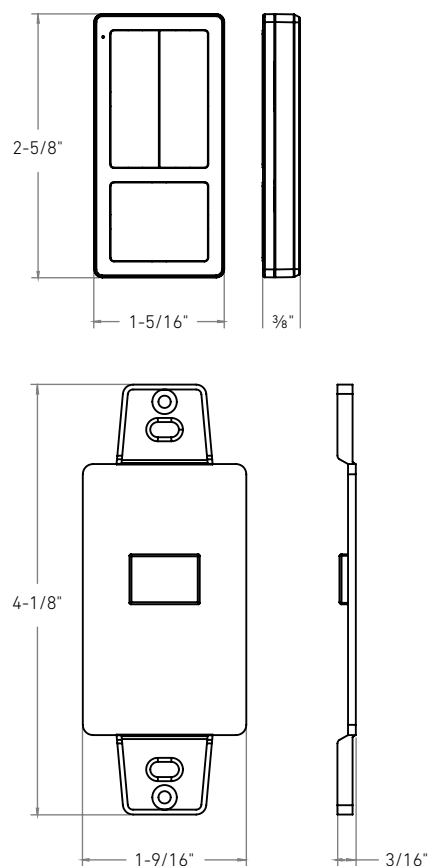

### Specifications

Indoor use only  
Controls any DALI Connect Pro device  
Tune whites, change colors, dim or turn on/off the lights  
Control your lights locally, without an internet connection, directly from the remote  
Fits any decorator wall plate (not included)  
Includes remote, CR2032 battery and magnetic wall plate adapter  
5-year warranty

### Finish

☐ **WH** White

### Download the DALI Connect app



# SMART DIMMER SWITCH

In need of a dimmer but not sure which one to get? Look no further. With the DALS Connect™ app, you will be able to create groups, set timers and much more. This is a great way to get to know smart home technologies and perhaps convince you to come and join us on the smart side with our ever growing smart product line.





SM-DIMSW



| Model    | Size   | Dimmer | Scheduling | Sunrise & Sunset setting | Alexa & Google Assistant compatible | Voltage |
|----------|--------|--------|------------|--------------------------|-------------------------------------|---------|
| SM-DIMSW | 4 1/2" | √      | √          | √                        | √                                   | 120 V   |

## SM-DIMSW

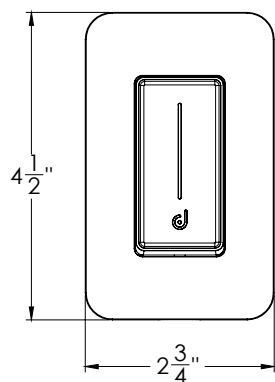

### Specifications

Indoor use only  
Control from the wall switch or with the DALS Connect app  
LED brightness indicator  
Touch-sensitive slide dimmer  
Works with all "non-smart" standard lights  
Dimming type: TRIAC Edge cut  
Inductive load (LED-CFL): 250W max.  
Resistive load (incan.): 430W max.  
Standby power: 1W  
5-year warranty

### Finish

☐ **WH** White

### Note

Does not work with DALS smart lights.  
Requires a neutral wire. Works in a single-pole setup only. Secured 2.4 GHz wireless network required.

### Download the DALS Connect app

Wi-Fi - no hub needed  
Create groups  
Set schedules  
Remote access  
Compatible with Google Assistant and Amazon Alexa



# PRO BULBS


Enter the world of Smart lighting with our array of dimmable LED Bluetooth controlled bulbs that emit a full spectrum of vibrant colors or tunable pure whites ranging from 2700 to 6500 K.




| Model       | Size | Watts | Delivered lumens | CRI | Color °T              | Voltage |
|-------------|------|-------|------------------|-----|-----------------------|---------|
| DCP-BLBA21  | A21  | 12 W  | 1100 lm          | 90  | RGB + 2700 K - 6500 K | 120 V   |
| DCP-BLBBR30 | BR30 | 12 W  | 1200 lm          |     |                       |         |



## DCP-BLBA21



## DCP-BLBBR30



### Specifications

Full color spectrum  
2700K - 6500K in pure whites  
Suitable for enclosed fixtures  
Dimmable through the DALI Connect app  
and the Clicc remote (DCP-RMCT)  
5-year warranty

### Finish

☐ **WH** White

### Accessories

**DCP-RMCT**  
Smart remote

### Note

Add the DALI Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

### Download the DALI Connect app


Create groups  
Set schedules  
Remote access\*  
Compatible with Google Assistant and Amazon Alexa\*



\*Hub needed

# GLOW

The 10, 20, and 50-foot smart tape features a full RGB color range and tunable white light, enabling users to adjust from warm to cool tones, perfect for adding dynamic and personalized lighting to any space.

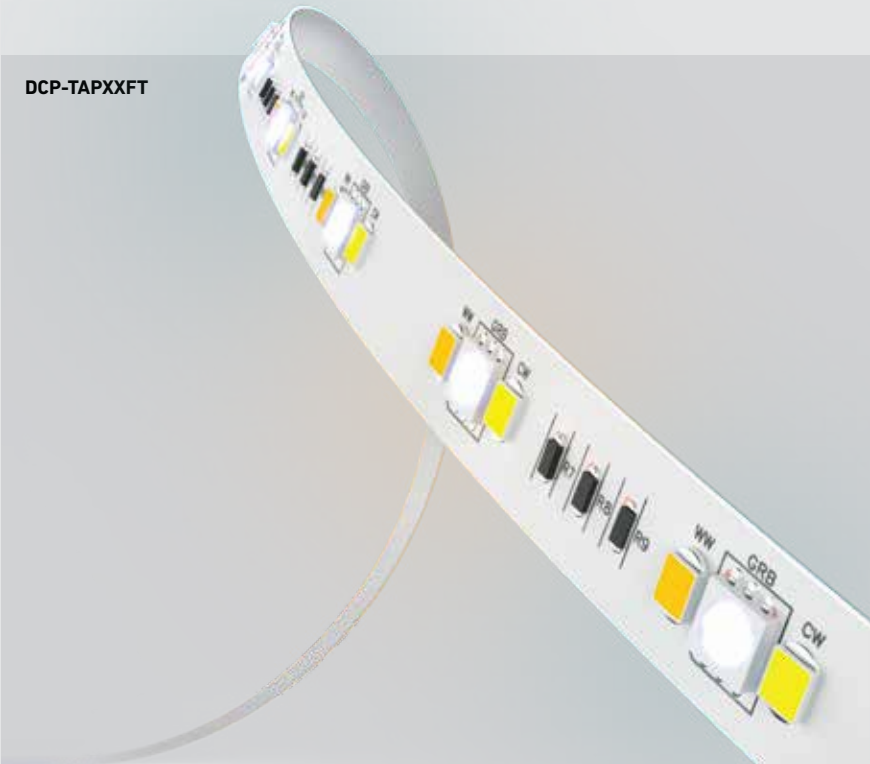


DCP-TAPXXFT




| Model       | Size | Watts         | Delivered lumens | CRI | Color °T              | Voltage |
|-------------|------|---------------|------------------|-----|-----------------------|---------|
| DCP-TAP10FT | 10'  | 9 W           | 700 lm           | 80  | RGB + 2700 K - 6500 K | 24 VDC  |
| DCP-TAP20FT | 20'  | 16 W          | 1200 lm          |     |                       |         |
| DCP-TAP50FT | 50'  | 19 W /per 25' | 1400 lm /per 25' |     |                       |         |



#### DCP-TAP10FT / DCP-TAP20FT

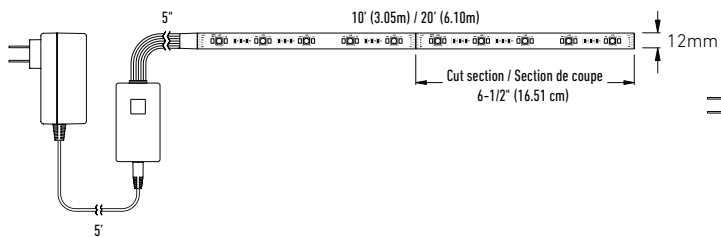

#### DCP-TAP50FT

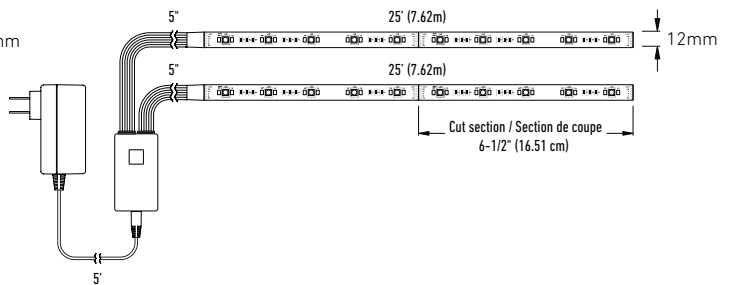

#### Specifications

Full color spectrum  
2700K - 6500K in pure whites  
Includes a wired controller with smart button for CCT selection, color customization and on/off control  
Dimmable through the DALI Connect app and the Clicc remote (DCP-RMCT)  
5-year warranty

#### Note

Add the DALI Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

#### Accessories

##### DCP-RMCT

Smart remote

##### DCP-TAP-EXT04, DCP-TAP-EXT12, DCP-TAP-EXT60

4", 12", and 60" extension cables

##### ALXT-RECXFT / ALXT-SURXFT

3' and 6' aluminum extrusions, recessed or surface-mounted, in black or white finishes

##### ALXT-REC-20FTLENS / ALXT-SUR-20FTLENS

20' frosted lenses for recessed and surface extrusions, black or white finishes

#### Finish

☐ WH White

#### Download the DALI Connect app

Create groups  
Set schedules  
Remote access\*  
Compatible with Google Assistant and Amazon Alexa\*



\* Hub needed

# FRAME

Frame elegantly combines functionality with style, offering a dynamic lighting experience, all conveniently controlled by a sleek smart button for personalized illumination.



DCP-CGWS




**Easy-Select Button**  
No app needed, press to choose from 7 colors or tunable white tones (2200K-4000K).

| Model    | Size    | Watts | Delivered lumens | CRI | Color °T              | Voltage |
|----------|---------|-------|------------------|-----|-----------------------|---------|
| DCP-CGWS | 12-7/8" | 20 W  | 1000 lm          | 80  | RGB + 2200 K - 4000 K | 120 V   |



## DCP-CGWS

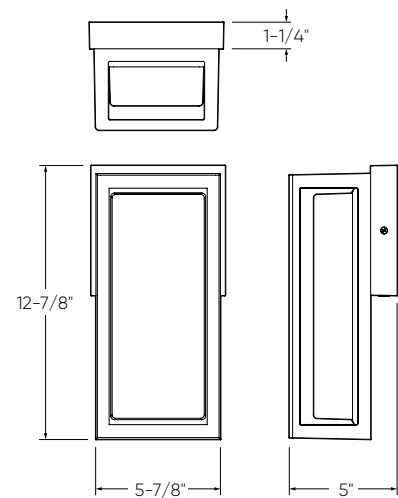

## Specifications

Full color spectrum  
2200K - 4000K in pure whites  
Choose from 7 preset colors and 5 white tones directly using the button, or access additional options through the app  
Dimmable through the DALI Connect app and the Clicc remote (DCP-RMCT)  
Wall mount on 4" octagonal junction box  
120° beam angle  
5-year warranty

## Finish

● **BK** Black

## Accessories

**DCP-RMCT**  
Smart remote

## Note

Add the DALI Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

## Download the DALI Connect app

Create groups  
Set schedules  
Remote access\*  
Compatible with Google Assistant and Amazon Alexa\*



\*Hub needed

# INDEX

|                   |     |
|-------------------|-----|
| 4000-E24 .....    | 102 |
| 4000-E60 .....    | 102 |
| 4000HRNS-24 ..... | 102 |
| 4001-CC .....     | 90  |
| 4005-CC .....     | 91  |
| 4024R-CC .....    | 82  |
| 4024S-CC .....    | 82  |
| 5000-EXT .....    | 75  |
| 5003-CC .....     | 64  |
| 5004-CC .....     | 64  |
| 5004-DW .....     | 64  |
| 5004-FR-CC .....  | 64  |
| 5004SQ-CC .....   | 64  |
| 5005-CC .....     | 64  |
| 5006-CC .....     | 64  |
| 5006-FR-CC .....  | 64  |
| 6000-ACCE06 ..... | 107 |
| 6000-ACCE24 ..... | 107 |
| 6000-ACCE60 ..... | 107 |
| 6000-ACCLR .....  | 107 |
| 6000-ACCPC .....  | 107 |
| 6000-JB .....     | 106 |
| 6001-CC .....     | 97  |
| 6001-E24 .....    | 106 |
| 6001-E60 .....    | 106 |
| 6001-PC .....     | 106 |
| 6009CC .....      | 98  |
| 6012CC .....      | 98  |
| 6024CC .....      | 98  |
| 6036CC .....      | 98  |
| 6048CC .....      | 98  |
| 9000-ACCE24 ..... | 107 |
| 9000-ACCE72 ..... | 107 |
| 9009CC-WH .....   | 100 |
| 9012CC-WH .....   | 100 |
| 9018CC-WH .....   | 100 |
| 9024CC-WH .....   | 100 |
| 9030CC-WH .....   | 100 |

## A

|                       |     |
|-----------------------|-----|
| ACCSTSL .....         | 214 |
| ALXT-REXFT .....      | 103 |
| ALXT-REXFTLENS .....  | 103 |
| ALXT-SURXFT .....     | 103 |
| ALXT-SURXFTLENS ..... | 103 |
| ATR02-CDW .....       | 30  |
| ATR03-CDW .....       | 30  |
| ATR04-CDW .....       | 30  |

## B

|                  |    |
|------------------|----|
| BT06DIM-IC ..... | 96 |
| BT12DIM-IC ..... | 96 |
| BT24DIM-IC ..... | 96 |
| BT36DIM .....    | 96 |
| BT48DIM .....    | 96 |

## C

|                          |     |
|--------------------------|-----|
| CFG13-CC .....           | 150 |
| CFH12-CC .....           | 148 |
| CFH21-CC .....           | 148 |
| CFLEDRO6-CC .....        | 154 |
| CFLEDRI0-CC .....        | 154 |
| CFLEDRI4-CC .....        | 154 |
| CFLEDRI8-CC .....        | 154 |
| CFLEDRI24-CC .....       | 154 |
| CFLEDSQ06-CC .....       | 154 |
| CFLEDSQ10-CC .....       | 154 |
| CFLEDSQ14-CC .....       | 154 |
| COBTB-EXT60 .....        | 103 |
| COBTP-CC06 .....         | 103 |
| COBTP-EXT02 .....        | 103 |
| COBTP-EXT24 .....        | 103 |
| COBTP-REEL .....         | 94  |
| COBTP24V-ACCI .....      | 105 |
| COBTP24V-ACCL .....      | 105 |
| COBTP24V-CC36 .....      | 105 |
| COBTP24V-ETR30 .....     | 105 |
| COBTP24V-ETR60 .....     | 105 |
| COBTP24V-EXT120 .....    | 105 |
| COBTP24V-EXT24 .....     | 105 |
| COBTP24V-EXT60 .....     | 105 |
| COBTP24V-K10FT-CC .....  | 84  |
| COBTP24V-K20FT-CC .....  | 84  |
| COBTP24V-R100FT-CC ..... | 84  |
| COBTP24V-R50FT-CC .....  | 84  |
| COBTP24V-SWT .....       | 105 |
| COBTP3M .....            | 94  |
| COBTP5M .....            | 94  |
| CYL05-CC .....           | 146 |
| CYL05-TRIM-XX .....      | 214 |
| CYL06-CC-V .....         | 146 |
| CYL06-TRIM-XX .....      | 214 |

## D

|                    |     |
|--------------------|-----|
| DCP-45HP20 .....   | 250 |
| DCP-ACC-MB .....   | 269 |
| DCP-ACC-MS06 ..... | 269 |
| DCP-ACC-MS12 ..... | 269 |
| DCP-BLBA21 .....   | 282 |
| DCP-BLBBR30 .....  | 282 |
| DCP-BRK12 .....    | 256 |
| DCP-CGWS .....     | 286 |
| DCP-CPL24 .....    | 246 |
| DCP-DDP4 .....     | 42  |
| DCP-DDP6 .....     | 42  |
| DCP-FGM4 .....     | 58  |
| DCP-FLD100 .....   | 252 |
| DCP-FLD30 .....    | 254 |
| DCP-FMM12 .....    | 156 |
| DCP-GBR35 .....    | 54  |
| DCP-HUBV2 .....    | 276 |
| DCP-LHS12 .....    | 258 |

|                      |     |
|----------------------|-----|
| DCP-LNPD48 .....     | 124 |
| DCP-LNR24 .....      | 48  |
| DCP-LNR48 .....      | 48  |
| DCP-MTR300 .....     | 266 |
| DCP-MTR60 .....      | 266 |
| DCP-NFTAP5M .....    | 260 |
| DCP-PNL4 .....       | 64  |
| DCP-PNL6 .....       | 64  |
| DCP-PTR36 .....      | 269 |
| DCP-RK10 .....       | 264 |
| DCP-RK18 .....       | 264 |
| DCP-RMCT .....       | 278 |
| DCP-SPT6 .....       | 244 |
| DCP-SPTACCLENS ..... | 269 |
| DCP-SPTXT14 .....    | 269 |
| DCP-STG48 .....      | 262 |
| DCP-STGACCBLE .....  | 269 |
| DCP-STGACCPCB .....  | 269 |
| DCP-STK20 .....      | 248 |
| DCP-STK50 .....      | 248 |
| DCP-TAP10FT .....    | 284 |
| DCP-TAP20FT .....    | 284 |
| DCP-TAP50FT .....    | 284 |
| DD1260 .....         | 95  |
| DD2448 .....         | 89  |
| DDP4-CC .....        | 42  |
| DDP4-TRIM .....      | 75  |
| DDP6-CC .....        | 42  |
| DDP6-TRIM .....      | 75  |
| DR2412DIM .....      | 86  |
| DR2424DIM .....      | 86  |
| DR2448DIM .....      | 86  |
| DR2460DIM .....      | 86  |
| DR2496DIM .....      | 86  |
| DRR2-CC .....        | 36  |
| DRR4-CC .....        | 36  |
| DRR4-TRIM .....      | 75  |
| DRR6-CC .....        | 36  |
| DRR6-TRIM .....      | 75  |
| DSWC05-CC .....      | 92  |
| DSWC07-CC-V .....    | 192 |

## F

|                    |     |
|--------------------|-----|
| FGM2-CC .....      | 58  |
| FGM3-CC .....      | 58  |
| FGM4-3K .....      | 58  |
| FGM4-CC .....      | 58  |
| FGM4-CC-DUO .....  | 58  |
| FGM4-CC-TRIO ..... | 58  |
| FGM4SQ-CC .....    | 58  |
| FGM6-CC .....      | 58  |
| FMM09-CC .....     | 156 |
| FMM12-CC .....     | 156 |
| FMP05-CC .....     | 160 |
| FMP05-CC-CR .....  | 160 |
| FMP05M-CC .....    | 160 |

|                   |     |
|-------------------|-----|
| FMP09-CC .....    | 160 |
| FMP09-CC-CR ..... | 160 |
| FMP12-CC .....    | 160 |
| FMP12-CC-CR ..... | 160 |
| FPD-CC .....      | 136 |
| FPD60-CC .....    | 136 |

## G

|                     |     |
|---------------------|-----|
| GBR04-CC .....      | 54  |
| GBR04-DW .....      | 54  |
| GBR06-CC .....      | 54  |
| GBR06-DW .....      | 54  |
| GBR35-CC .....      | 54  |
| GBR35-CC-DUO .....  | 54  |
| GBR35-CC-TRIO ..... | 54  |
| GBR35-DW .....      | 54  |
| GBR35SQ-CC .....    | 54  |
| GL-CFG13 .....      | 214 |
| GMB2-CC .....       | 62  |
| GMB4-CC .....       | 62  |
| GRD2-CC .....       | 232 |
| GSP-CC-EXT .....    | 75  |
| GSP3-CC .....       | 52  |

## H

|               |    |
|---------------|----|
| HPD4-CC ..... | 46 |
| HPD6-CC ..... | 46 |
| HPD8-CC ..... | 46 |

## I

|               |     |
|---------------|-----|
| IND4-DW ..... | 44  |
| IND6-DW ..... | 44  |
| IRPD-CC ..... | 122 |

## K

|                |    |
|----------------|----|
| K4005-CC ..... | 91 |
|----------------|----|

## L

|                        |     |
|------------------------|-----|
| LAN-ACC-MS .....       | 268 |
| LAN-ACC-PS .....       | 268 |
| LCBL-100-12 .....      | 268 |
| LCBL-100-14 .....      | 268 |
| LCBL-100-16 .....      | 268 |
| LCBL-200-12 .....      | 268 |
| LCBL-50-14 .....       | 268 |
| LCBL-50-16 .....       | 268 |
| LEDDOWNACC-GOOF3 ..... | 74  |
| LEDDOWNACC-GOOF4 ..... | 74  |
| LEDDOWNACC-GOOF6 ..... | 74  |
| LEDDOWNG3-CC .....     | 62  |
| LEDHRNS-6 .....        | 102 |
| LEDPATH004D .....      | 238 |
| LEDTRDM1 .....         | 92  |
| LEDTRDP18 .....        | 93  |



**Canada**

80, blvd. de la Seigneurie, East  
Blainville, Quebec J7C 4N1  
450 430 1818

**U.S.A**

4383, NW 124<sup>th</sup> Ave.,  
Coral Springs, Florida 33065

**Customer service**

877 430 1818

For information regarding distributors  
and points of sale please visit our website  
[dals.com](http://dals.com) or email: [info@dals.com](mailto:info@dals.com)



[dals.com](http://dals.com)





dals