


PILLAR

Pillar combines architectural form with creative flexibility. Available in 8" and 42" heights and finished in matte black or white, this cylindrical fixture makes a strong visual statement. Its modular system invites personalization, extension tubes for varied proportions, a glass globe for a refined glow, and felt disks in six curated tones that soften both light and sound. Designed for individuality and balance, Pillar allows you to define how bold or subtle it becomes.

PIL08-CC EXAMPLE CONFIGURATION


PILACCT-24
EXTENSION TUBE – 24"
Mounted to the ceiling, this tube sets the desired height of the fixture.



PIL08-CC
FIXTURE BODY – 8"
Houses the integrated light engine and connects directly below the extension.




PIL-ACCFD24
FELT DISK – LIGHT BEIGE
Adds a warm, tactile accent and provides sound-dampening performance.

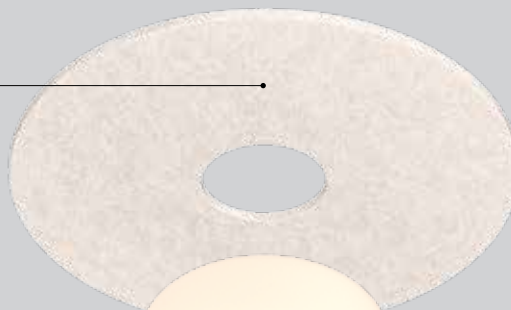

Includes a felt disk fastening ring for use when a glass globe is not desired.

PIL-ACCGB
GLASS GLOBE
Finishes the composition with a soft, diffused glow while securing the felt disk in place.

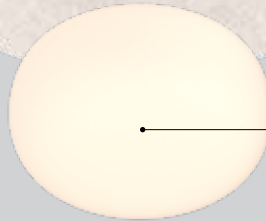

NEW

PIL08-CC

PIL42-CC



COLOR SELECT



WET

T24
JA8
CERTIFIED



UNIVERSAL DRIVER



REPLACEABLE DRIVER



SOUND DAMPENING



Accessories for Pillar Flush-Mount Fixtures

8", 24", and 42"
Extension tubes



Glass Globe



Sound-Dampening
Felt Disks



More from this family

PILW24-CC-UNV
pg. 178



NEW

PILLAR

Pillar merges architectural form with creative flexibility. Available in 8" and 42" heights in matte black or white, this modular cylindrical fixture invites personalization with extension tubes, a glass globe, and felt disks in six tones that soften light and sound.



COLOR SELECT



WET

**T24
JA8**
CERTIFIED



UNIVERSAL DRIVER



REPLACEABLE DRIVER




SOUND DAMPENING




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage ⚡
PIL08-CC-UNV	8"	34 W	2500 lm	90	2200, 2700, 3000, 3500, 4000 K	120 / 277 / 347V Triac, ELV, and 0-10V dimming
PIL42-CC-UNV	42"	34 W	2500 lm			

PIL08-CC-UNV
PIL42-CC-UNV

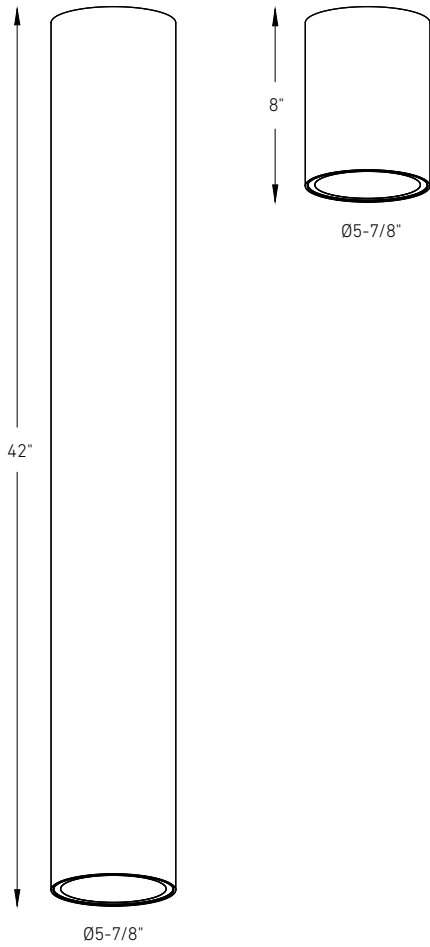


Flush-Mount Accessories


PIL-ACCT08
PIL-ACCT24
PIL-ACCT42



PIL-ACCGB



PIL-ACCFD24

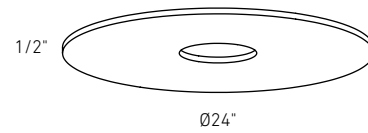

Specifications

- Switch-selectable CCT
- 36° beam angle
- Replaceable driver
- Universal voltage: 120V, 277V, or 347V input with TRIAC, ELV, and 0-10V dimming
- Canopy mounts on a 4" octagon junction box
- Felt disk accessories have an NRC of 0.8, helping reduce echo and background noise for a quieter environment
- 5-year warranty

Finish

- **BK** Black
- **WH** White

Accessories

PIL-ACCT08, PIL-ACCT24, PIL-ACCT42
 8", 24", and 42" extension tubes for Pillar Series flush mounts. Available in black or white.

PIL-ACCFD24
 24" sound-dampening felt disk for Pillar Series flush mounts. Available in light beige, green, dark blue, light gray, medium gray, and dark gray.

PIL-ACCGB
 Glass globe for Pillar Series flush mounts.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.
 The wall-mounted version does not support the accessory system.



