

PIVOT

FGM4-CDW

4" flat round gimbal recessed

dals


PROJECT

DATE


TYPE

QTY

NOTES

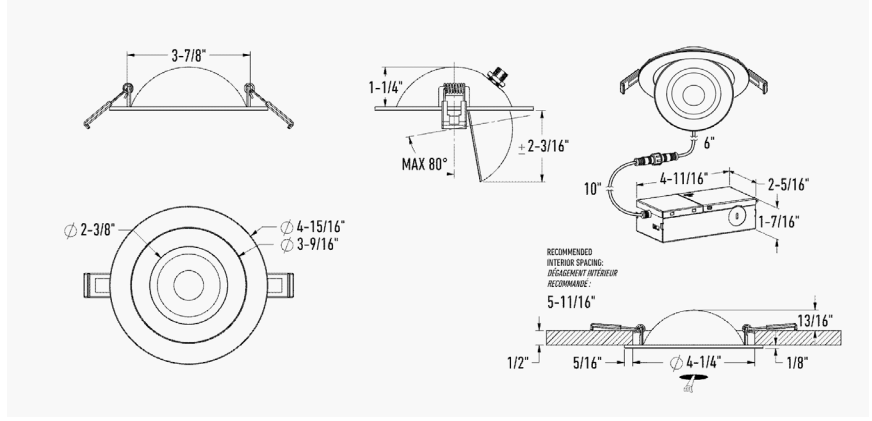

LIGHT DISTRIBUTION

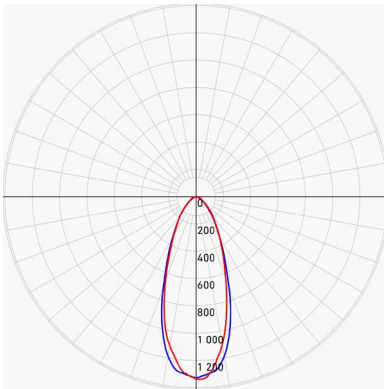

Distance from luminaire	FC at Nadir	Diameter
4'	83.4 fc	2'-9"
6'	37.1 fc	4'-2"
8'	20.9 fc	5'-6"
10'	13.3 fc	6'-11"
12'	9.3 fc	8'-4"

*measured at 3000k

SPECS

Cut hole size (in)	4-1/4"	
Watts (W)	9	
Delivered lumens*	940	
Voltage (v)	124	
FT rating	FT6	
CRI	92	
TM-30	Rf : 91	Rg : 100
Binning	3 SDCM	
Beam angle (deg)	40	
UGR	26	
LED model	SMD2835	
Dimming	Triac / ELV	
Color temperature	2700/3000/3500/4000/5000k + DW 3000-2200k	

CONSTRUCTION

Lens material	Polycarbonate
Optic type	Optical lens

ELECTRICAL DETAILS

Location	Wet	
Environment	Indoor/Outdoor	
Operating temp. (° C)	-20	to 40
IP rating	IP65	
Input voltage (V)	120	
Input current (mA)	80	
Output voltage (V)	32-48	
Output current (mA)	213	
Power factor (%)	99	
Driver type	Constant current	
THD	16.12	
Lifetime @ L70	>50 000hrs	

ORDERING GUIDE

FGM4-CDW	-		-		Qty
				Finish	
WH	-	White	☐	Blank	- Single
BK	-	Black	☐	K12	- Kit of 12
SN	-	Satin nickel	☐		

CERTIFICATIONS

ETL listed	UL-1598	and	CSA C22.2 No. 250.0
Title 24-JA8, Energy Star, IC rated, Air-tight ASTM E283-04			
Compliant to	FCC Title 47 Part 15; Class B		
ICES-005 Issue 5			



CANADA
80, Blvd. de la Seigneurie E.
Blainville, Quebec J7C 4N1

USA
4383, NW 124th Ave.,
Coral Springs, Florida 33065

1 877.430.1818
info@dals.com
dals.com

WHAT'S IN THE BOX

- Recessed fixture
- Junction box
- 3x push-in wire connectors
- 1/2" non-Metallic Connector
- Instruction sheet

ACCESSORIES

- REC-RFP-4**
26" Rough-in template Ø4-1/4"
- REC-RFPE4**
13" Rough-in template Ø4-1/4"
- RFP-UNI**
Universal rough-in template
- REC-EMD15**
15w Emergency battery

EXTENSIONS

- REC-CDW-EXT8FT**
96" extension cord for recessed fixtures
- REC-CDW-EXT20FT**
240" extension cord for recessed fixtures

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DAL'S customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST**

BRAND	MODEL	DIMMER SPECS	DIMMING RANGE %		MAX LOAD (units)
			MIN	MAX	
Dals	SM-DIMSW Smart Dimmer*	Triac, 250W LED/CFL	3	100	28
Lutron	DVCL-153PR-WH-C*	Triac, 150 W Dimmable CFL/LED	5	100	17
Lutron	CTCL-153PDH-WH-C*	Triac, 150 W Dimmable CFL/LED	6	100	17
Lutron	STCL-153PH-WH-C*	Triac, 150 W Dimmable CFL/LED	7	100	17
Lutron	DVLV-600P-BL	Magnetic Low Voltage, 450W	10	100	51
Lutron	MACL-153MRHW-WHC*	Triac, 150 W Dimmable CFL/LED	2	100	17
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	8	100	34
Lutron	MA-PRO-WH*	ELV, 250W LED/CFL	4	100	28
Lutron	Caseta PD-6WCL-WH-R-C*	Triac, 300W Dimmable CFL/LED	7	100	17
Lutron	Caseta PD-5NE-WH-C*	ELV, LED—up to 250 W	2	100	28
Lutron	Caseta PD-10NXD-WH*	Triac, LED—up to 250 W	0	100	28
Leviton	DSM10-1LZ*	Triac, 450W Dimmable CFL/LED	7	100	51
Leviton	6674*	Triac, 150 W Dimmable CFL/LED	9	100	17
Leviton	PL06-10Z*	Triac, 150 W Dimmable CFL/LED	9	100	17
Leviton	DSL06-1LZ*	Triac, 300 W Dimmable CFL/LED	9	100	34
Leviton	D26HD-742-1RW*	Triac, 300W LED/CFL	10	100	34
Legrand	ADTP703TUM4*	Triac, 450W Dimmable CFL/LED	0	100	51
Control 4	C4-APD120-WH	ELV, 120W LED	0	100	14
Control 4	C4-FPD120-WH	Triac, 200W LED	0	100	23
Commercial Electric	HPDA311CWB*	Triac, 150W LED & CFL	0	100	17
TP-Link	HS220*	Triac, 150 W, Dimmable LED (MLV)	1	100	17
Leviton	RDL06-10Z	Triac, 150W LED & CFL	10	100	17

*With low-end adjustment feature. **Some dimmers may produce minimal buzzing noise.

FGM4-CDW

Revision 0 | 2026-01



CANADA
80, Blvd. de la Seigneurie E.
Blainville, Quebec J7C 4N1

USA
4383, NW 124th Ave.,
Coral Springs, Florida 33065

1 877.430.1818
info@dals.com
dals.com