

REVOLVE

GBR06-CDW

6" round regressed gimbal downlight

dals


PROJECT

DATE


TYPE

QTY

NOTES

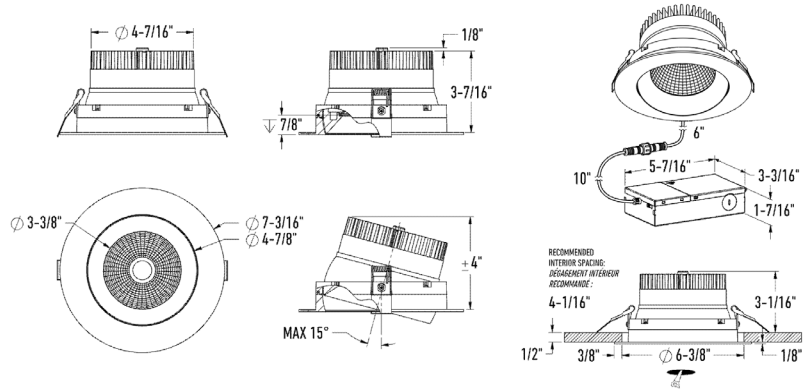

LIGHT DISTRIBUTION

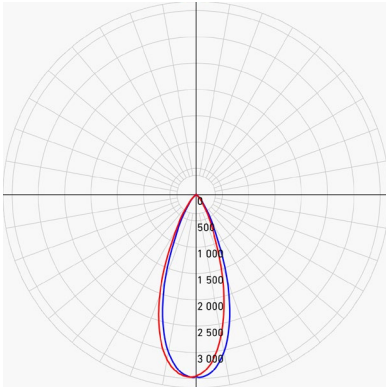

Distance from luminaire	FC at Nadir	Diameter
4'	215.6 fc	2'-6"
6'	95.8 fc	3'-8"
8'	53.9 fc	4'-11"
10'	34.5 fc	6'-2"
12'	24.0 fc	7'-5"

*measured at 3000k

SPECS

Cut hole size (in)	6-3/8"
Watts (W)	20
Delivered lumens*	1750
Voltage (v)	120
FT rating	FT6
CRI	91
TM-30	Rf : 90 Rg : 99
Binning	3 SDCM
Beam angle (deg)	40
UGR	17
LED model	COB
Dimming	Triac / ELV
Color temperature	2700/3000/3500/4000/5000k + DW 3000-2200k

CONSTRUCTION

Lens material	Polycarbonate
Optic type	Optical lens

ELECTRICAL DETAILS

Location	Wet
Environment	Indoor/Outdoor
Operating temp. (° C)	-20 to 40
IP rating	IP65
Input voltage (V)	120
Input current (mA)	180
Output voltage (V)	32-48
Output current (mA)	470
Power factor (%)	98
Driver type	Constant current
THD	13.54
Lifetime @ L70	>50 000hrs

Finish type	Matte
Housing material	Aluminum

ORDERING GUIDE

GBR06-CDW	-	Finish
WH	-	White
BK	-	Black

CERTIFICATIONS

ETL listed	UL-1598	and	CSA C22.2 No. 250.0
Title 24-JA8, Energy Star, IC rated, Air-tight ASTM E283-04			
Compliant to	FCC Title 47 Part 15; Class B		
ICES-005 Issue 5			



CANADA
80, Blvd. de la Seigneurie E.
Blainville, Quebec J7C 4N1

USA
4383, NW 124th Ave.,
Coral Springs, Florida 33065

1 877.430.1818
info@dals.com
dals.com

WHAT'S IN THE BOX

Recessed fixture
Junction box
3x push-in wire connectors
1/2" non-Metallic Connector
Instruction sheet

ACCESSORIES

REC-RFPE6
13" Rough-in template Ø6-3/8"

REC-RFP-6
26" Rough-in template Ø6-3/8"

RFP-UNI
Universal rough-in template

EXTENSIONS

REC-CDW-EXT8FT
96" extension cord for recessed fixtures

REC-CDW-EXT20FT
240" extension cord for recessed fixtures

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics.
To contact DAL'S customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST**

BRAND	MODEL	DIMMER SPECS	DIMMING RANGE %		MAX LOAD (units)
			MIN	MAX	
Dals	SM-DIMSW Smart Dimmer*	Triac, 250W LED/CFL	5	100	12
Lutron	DVCL-153PR-WH-C*	Triac, 150 W Dimmable CFL/LED	4	100	7
Lutron	CTCL-153PDH-WH-C*	Triac, 150 W Dimmable CFL/LED	4	100	7
Lutron	STCL-153PH-WH-C*	Triac, 150 W Dimmable CFL/LED	10	100	7
Lutron	MACL-153MRHW-WHC*	Triac, 150 W Dimmable CFL/LED	0	100	7
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	7	96	15
Lutron	MA-PRO-WH*	ELV, 250W LED/CFL	0	100	12
Lutron	Caseta PD-6WCL-WH-R-C*	Triac, 300W Dimmable CFL/LED	3	100	7
Lutron	Caseta PD-5NE-WH-C*	ELV, LED—up to 250 W	2	100	12
Lutron	Caseta PD-10NXD-WH*	Triac, LED—up to 250 W	0	100	12
Leviton	DSM10-1LZ*	Triac, 450W Dimmable CFL/LED	5	100	22
Leviton	6674*	Triac, 150 W Dimmable CFL/LED	6	100	7
Leviton	PL06-10Z*	Triac, 150 W Dimmable CFL/LED	6	100	7
Leviton	DSL06-1LZ*	Triac, 300 W Dimmable CFL/LED	6	100	15
Leviton	D26HD-742-1RW*	Triac, 300W LED/CFL	9	100	15
Legrand	RHCL453PNICCV4*	Triac, 450W Dimmable CFL/LED	10	100	22
Legrand	ADTP703TUM4*	Triac, 450W Dimmable CFL/LED	0	100	22
Control 4	C4-APD120-WH	ELV, 120W LED	0	100	6
Control 4	C4-FPD120-WH	Triac, 200W LED	0	100	10
Commercial Electric	HPDA311CWB*	Triac, 150W LED & CFL	9	100	7
TP-Link	HS220*	Triac, 150 W, Dimmable LED (MLV)	4	100	7

*With low-end adjustment feature. **Some dimmers may produce minimal buzzing noise.

