

TRACE

LSTP02M-CC

3" Vertical recessed step light

dals


PROJECT

DATE


TYPE

QTY

NOTES

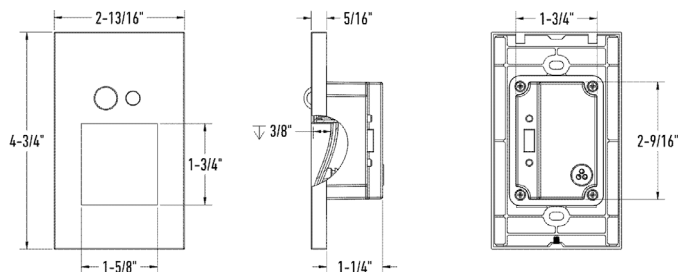

LIGHT DISTRIBUTION

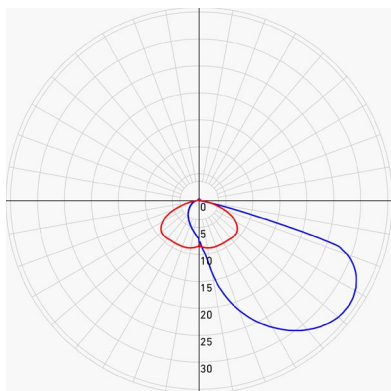

Distance from luminaire	FC at Nadir	Diameter
2'	2.0 fc	12'-8"
3'	0.9 fc	19'
4'	0.5 fc	25'-4"
5'	0.3 fc	31'-9"
6'	0.2 fc	38'-1"

*measured at 3000k

SPECS

Watts (W)	3
Delivered lumens*	70
Voltage (v)	120
CRI	96
TM-30	Rf : 92 Rg : 103
Binning	1 SDCM
Beam angle (deg)	82
UGR	-
LED model	2835
Light direction	Down
Dimming	Not dimmable
Mounting	2x3 Jbox
Color temperature	2200k/2700k/3000k/3500k/4000k

CONSTRUCTION

Lens material	Polystyrene
Optic type	Frosted

ELECTRICAL DETAILS

Location	Wet
Environment	Indoor/Outdoor
Operating temp. (° C)	-20 to 45
IP rating	IP65
Input current (mA)	30
Output voltage (V)	15
Output current (mA)	140
Power factor (%)	50
Driver type	Class 2
THD	-
Lifetime @ L70	-
BUG rating	B0-U1-G0

Finish type	Powder coated
Housing material	Aluminum

ORDERING GUIDE

LSTP02M-CC	-	Finish
WH	-	White
BK	-	Black

CERTIFICATIONS

ETL listed	UL-1598	and	CSA C22.2 No. 250.0
Compliant to	FCC Title 47 Part 15; Class B		
	ICES-005 Issue 5		



CANADA
80, Blvd. de la Seigneurie E.
Blainville, Quebec J7C 4N1

USA
4383, NW 124th Ave.,
Coral Springs, Florida 33065

1 877.430.1818
info@dals.com
dals.com

WHAT'S IN THE BOX

LED flush mount fixture
Mounting bracket
Mounting hardware
Wire nuts
Instruction sheet

ACCESSORIES**ADAPTORS**

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DAL'S customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

