

NAPA

NAPF12-CC-UNV

12" 2-in-1 flush mount and pendant

dals


PROJECT

DATE


TYPE

QTY

NOTES

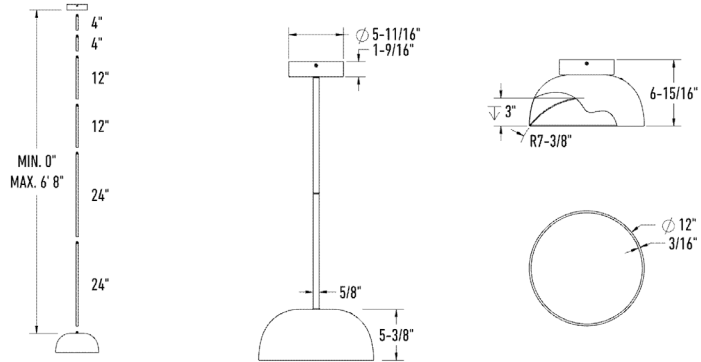

LIGHT DISTRIBUTION

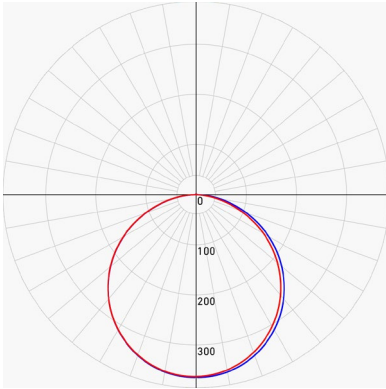

Distance from luminaire	FC at Nadir	Diameter
4'	22.7 fc	11'-8"
6'	10.1 fc	17'-5"
8'	5.7 fc	23'-3"
10'	3.6 fc	29'-1"
12'	2.5 fc	34'-11"

*measured at 3000k

SPECS

Watts (W)	20
Delivered lumens*	1100
Voltage (v)	120/277/347
CRI	93
TM-30	Rf : 92 Rg : 102
Binning	3 SDCM
Beam angle (deg)	110
UGR	37
LED model	SMD 2835
Light direction	Down
Dimming	Triac / ELV / 0-10V
Mounting	Screwed in
Color temperature	2700K/3000K/3500K/4000K/5000K

CONSTRUCTION

Lens material	Polycarbonate
Optic type	Frosted

ELECTRICAL DETAILS

Location	Dry
Environment	Indoor
Operating temp. (° C)	-20 to 40
IP rating	IP20
Input voltage (V)	120
Input current (mA)	180
Output voltage (V)	36
Output current (mA)	480
Power factor (%)	98
Driver type	Constant current
THD	16.62
Lifetime @ L70	-

Finish type	Sandy
Housing material	Aluminum

ORDERING GUIDE

NAPF12-CC-UNV	-	Finish
WH	-	White
BK	-	Black

CERTIFICATIONS

ETL listed	
Title 24-JA8	
Compliant to	FCC Title 47 Part 15; Class B
ICES-005 Issue 5	



CANADA
80, Blvd. de la Seigneurie E.
Blainville, Quebec J7C 4N1

USA
4383, NW 124th Ave.,
Coral Springs, Florida 33065

1 877.430.1818
info@dals.com
dals.com

WHAT'S IN THE BOX

- LED flush mount fixture
- Mounting bracket
- Mounting hardware
- Wire nuts
- Instruction sheet

ACCESSORIES

- NAPF20-ACCST24
24" stem extension
- ACCST02
2" stem extension
- ACCSTSL
Sloped adaptor

ADAPTORS

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DAL'S customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST**

BRAND	MODEL	DIMMER SPECS	DIMMING RANGE %		MAX LOAD (units)
			MIN	MAX	
Dals	SM-DIMSW Smart Dimmer*	Triac, 250W LED/CFL	6	100	12
Lutron	DVCL-153PR-WH-C*	Triac, 150 W Dimmable CFL/LED	3	100	7
Lutron	CTCL-153PDH-WH-C*	Triac, 150 W Dimmable CFL/LED	3	100	7
Lutron	STCL-153PH-WH-C*	Triac, 150 W Dimmable CFL/LED	10	100	7
Lutron	MACL-153MRHW-WHC*	Triac, 150 W Dimmable CFL/LED	1	100	7
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	9	100	14
Lutron	MA-PRO-WH*	ELV, 250W LED/CFL	3	100	12
Lutron	Caseta PD-6WCL-WH-R-C*	Triac, 300W Dimmable CFL/LED	2	100	7
Lutron	Caseta PD-10NXD-WH*	Triac, LED—up to 250 W	1	100	12
Leviton	6674*	Triac, 150 W Dimmable CFL/LED	6	100	7
Leviton	PL06-10Z*	Triac, 150 W Dimmable CFL/LED	6	100	7
Leviton	DSL06-1LZ*	Triac, 150 W Dimmable CFL/LED	6	100	7
Legrand	ADTP703TUM4*	Triac,450W Dimmable CFL/LED	0	100	22
Control 4	C4-APD120-WH	ELV, 120W LED	0	100	6
Control 4	C4-FPD120-WH	Triac, 200W LED	3	100	10
Commercial Electric	HPDA311CWB*	Triac, 150W LED & CFL	0	100	7
TP-Link	HS220*	Triac, 150 W, Dimmable LED (MLV)	6	100	7
Lutron	DVSTV (0–10 V Controls)*	960W, 8A, 120–277 V	0	100	46
Leviton	IP710-LFZ (0–10 V Controls)	1200VA, 10A LED, 120-277V	0	100	58
Leviton	ZS057-30Z (0-10 V Controls)	1388VA, 347VAC / 4A	12	100	38
Lutron	RMJS-8T-DV-B (0-10 V Controls)	120 / 277V, 8A,	0	100	46

*With low-end adjustment feature. **Some dimmers may produce minimal buzzing noise.

