

PIVOT

FGM4-CC-V

4in Flat gimbal recessed - Multi-voltage

dals



PROJECT

DATE


TYPE

QTY

NOTES

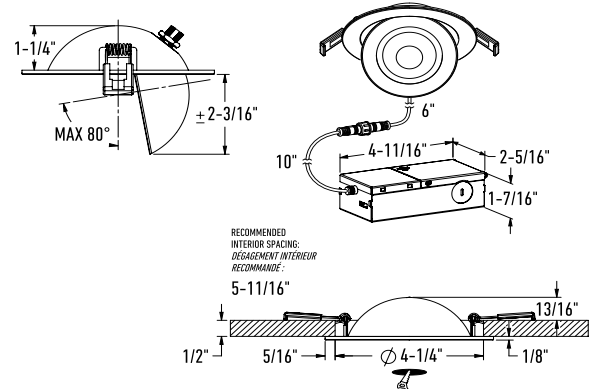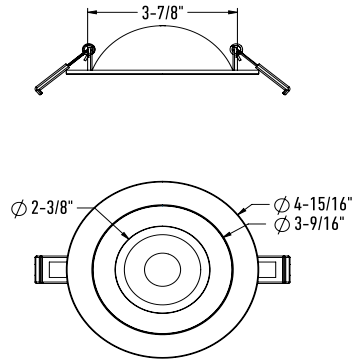

LIGHT DISTRIBUTION

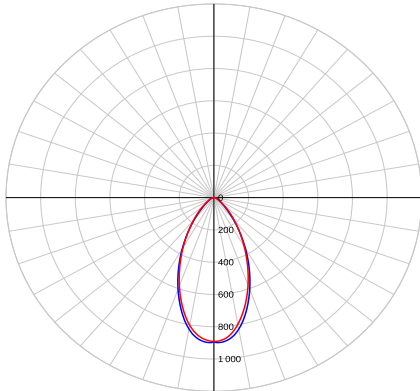

Distance from luminaire	FC at Nadir	Diameter
4'	55.7 fc	3'-10"
6'	24.7 fc	5'-9"
8'	13.9 fc	7'-8"
10'	8.9 fc	9'-7"
12'	6.2 fc	11'-6"

*measured at 3000k

SPECS

Cut hole size (in)	4-1/4"
Watts (W)	9
Delivered lumens*	815
Voltage (v)	120/277/347
FT rating	FT6
CRI	90
TM-30	Rf : 91 Rg : 100
Binning	3 SDCM
Beam angle (deg)	40
UGR	26
LED model	SMD 2835
Dimming	0-10V
Color temperature	2700K/3000K/3500K/4000K/5000K

CONSTRUCTION

Lens material	Acrylic
Optic type	Optical lens

ELECTRICAL DETAILS

Location	Wet
Environment	Indoor/Outdoor
Operating temp. (° C)	-20 to 50
IP rating	IP65
Input voltage (V)	120-347
Input current (mA)	80
Output voltage (V)	33
Output current (mA)	200
Power factor (%)	90
Driver type	Constant current
THD	9.10%
Lifetime @ L70	> 108 000hrs

Finish type	Matte
Housing material	Aluminum

ORDERING GUIDE

FGM4-CC-V

-

Finish

WH - White



CERTIFICATIONS

ETL listed UL-1598 and CSA C22.2 No. 250.0

Title 24-JA8, Energy Star, IC rated, Air-tight ASTM E283-04

Compliant to FCC Part 15 Subpart B

ICES-005 Issue 5



CANADA
80, Blvd. de la Seigneurie E.
Blainville, Quebec J7C 4N1

USA
4383, NW 124th Ave.,
Coral Springs, Florida 33065

1 877.430.1818
info@dals.com
dals.com

WHAT'S IN THE BOX

- Recessed fixture
- Junction box
- 3x push-in wire connectors
- 1/2" non-Metallic Connector
- Instruction sheet

WHAT'S IN THE BOX

- Recessed fixture
- Junction box
- 3x push-in wire connectors
- 1/2" non-Metallic Connector
- Instruction sheet

ACCESSORIES

- REC-RFPE4**
13" Rough-in template Ø4-1/4"
- REC-RFP-4**
26" Rough-in template Ø4-1/4"
- RFP-UNI**
Universal rough-in template
- REC-EMD08**
8w emergency battery

ACCESSORIES

- REC-RFPE4**
13" Rough-in template Ø4-1/4"
- REC-RFP-4**
26" Rough-in template Ø4-1/4"
- RFP-UNI**
Universal rough-in template
- REC-EMD08**
8w emergency battery

EXTENSIONS

REC-CC-EXT8FT
96" extension cord for recessed fixtures

REC-CC-EXT20FT
240" extension cord for recessed fixtures

EXTENSIONS

REC-CC-EXT8FT
96" extension cord for recessed fixtures

REC-CC-EXT20FT
240" extension cord for recessed fixtures

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.


WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

[illegible][illegible]

*With low-end adjustment feature. **Some dimmers may produce minimal buzzing noise.

FGM4-CC-V Revision 0 | 2026-06



	CANADA 80, Blvd. de la Seigneurie E. Blainville, Quebec J7C 4N1	USA 4383, NW 124th Ave., Coral Springs, Florida 33065	1 877.430.1818 info@dals.com dals.com
---	--	--	---

	CANADA 80, Blvd. de la Seigneurie E. Blainville, Quebec J7C 4N1	USA 4383, NW 124th Ave., Coral Springs, Florida 33065	1 877.430.1818 info@dals.com dals.com
---	--	--	---

	CANADA 80, Blvd. de la Seigneurie E. Blainville, Quebec J7C 4N1	USA 4383, NW 124th Ave., Coral Springs, Florida 33065	1 877.430.1818 info@dals.com dals.com
---	--	--	---