

SMART DIMMER SWITCH











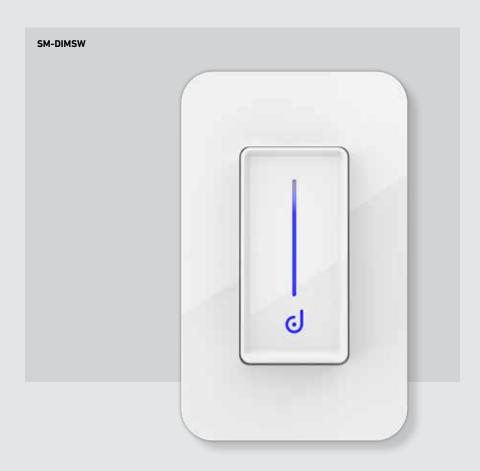

| Model | Size | Dimmer | Scheduling | Sunrise & Sunset setting | Alexa & Google Assistant compatible | Voltage |
|----------|--------|--------------|------------|--------------------------|--|---------|
| SM-DIMSW | 4 1/2" | \checkmark | √ · | √ | √ | 120 V |

SM-DIMSW







Specifications

Indoor use only

Control from the wall switch or with the Dals Connect app

LED brightness indicator

Touch-sensitive slide dimmer

Works with all "non-smart" standard lights

Dimming type: TRIAC Edge cut Inductive load (LED-CFL): 250W max. Resistive load (incan.): 430W max.

Standby power: 1W 5-year warranty

Finish



WH White

Note

Does not work with Dals smart lights. Requires a neutral wire. Works in a singlepole setup only. Secured 2.4 GHz wireless network required.

Download the Dals Connect app

Wi-Fi - no hub needed

Create groups

Set schedules

Remote access

Compatible with Google Assistant and Amazon Alexa





