



DALS LIGHTING

Canada
80, de la Seigneurie blvd., E.
Blainville, Quebec j7C 4N1

U.S.A.
4383, NW 124th Ave.,
Coral Springs, Florida 33065


877.430.1818
info@dals.com
dals.com

MODEL LEDVAN003-CC-32

NAME Lyra

32 Inch CCT LED Linear Vanity Light


These modern LED vanity lights can be installed in 2 directions; horizontal or vertical based on your desired lighting layout. Let your imagination go.

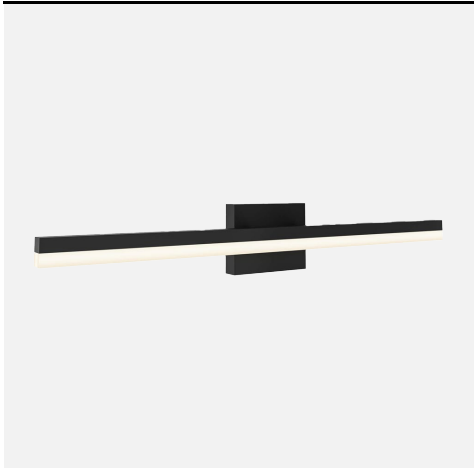


PROJECT [] **TYPE** []

DATE [] **QTY** []

NOTES

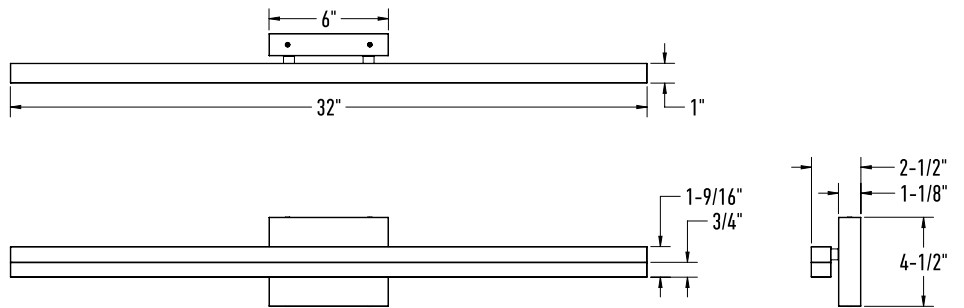

LIGHT DISTRIBUTION

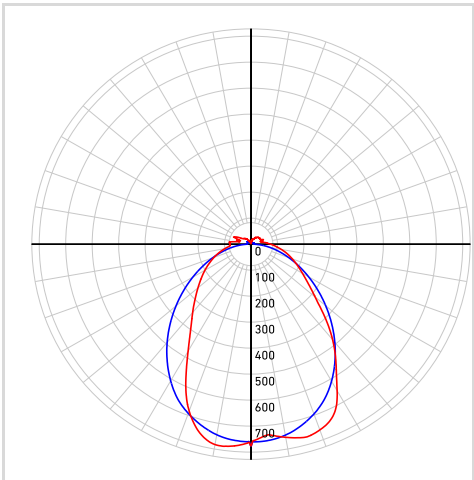

*Lumen output measured at 3000k

QUICK SPECS

Size	32"
Watts (W)	38
Delivered lumens*	2800
CRI	90
Voltage (v)	120
Beam angle (deg)	120
Mounting	Screwed in
Lifespan (hrs)	50 000
Binning	3 SCDM
LED model	SMD 2835
Light direction	Down
Color temperature	2700K/3000K/3500K/4000K/5000K

ELECTRICAL DETAILS

Environment	Damp
Location	Indoor
Operating temp. (° C)	-20 to 40
IP rating	IP40
Input voltage (V)	108-120
Output voltage (V)	35-45
Output current (mA)	880
Power factor	99
Driver type	Constant current
THD	≤ 30%
Certifications	ETL, ADA, JA8 / T24

ORDERING GUIDE

LEDVAN003-CC-32 - []

Finish

- BK** - Black
- SN** - Satin nickel
- GD** - Gold
- CH** - Chrome

CONSTRUCTION

Lens material	Acrylic
Lens type	Frosted
Finish type	Powder coated
Housing material	Aluminum

WHAT'S IN THE BOX

LED vanity light
 Mounting bracket
 Mounting hardware
 Wire nuts
 Instruction sheet

ACCESSORIES**ADAPTORS****RECOMMENDED DIMMER LIST***

BRAND	MODEL	DIMMER SPECS	GRADE	MIN	MAX	MAX LOAD
Lutron	MA-PRO-WH*	ELV, 250W LED/CFL	Compatible	1	95	7
Leviton	6674*	Triac, 150 W Dimmable CFL/LED	Compatible	7	100	4
Leviton	DSL06-1LZ*	Triac, 150 W Dimmable CFL/LED	Compatible	6	100	4
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	1	100	3

*With Low-End Adjustment Feature

Minimal buzzing noise may occur with some dimmers

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DAL'S customer service call 1-877-430-1818 or send an e-mail to info@dals.com.