

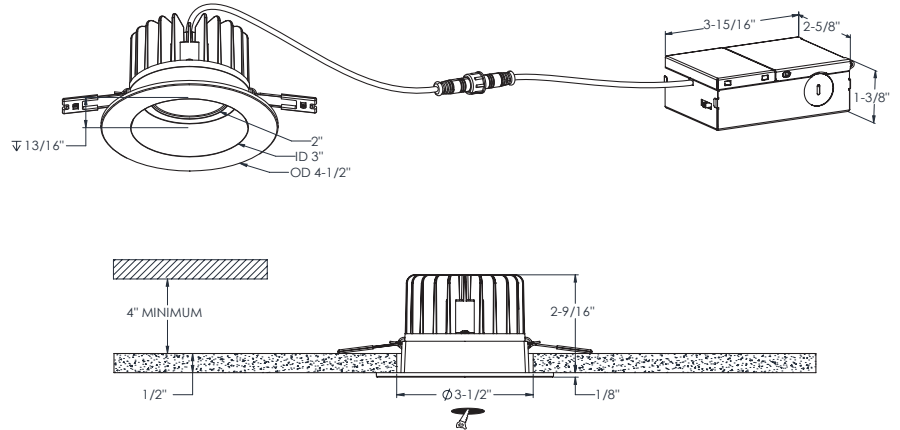
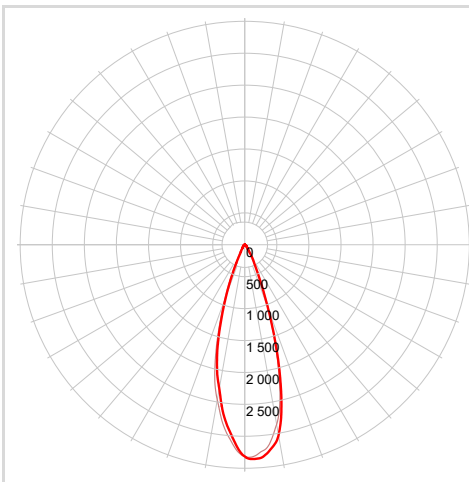
**MODEL** RGR4-CC

**NAME** RGR

4 Inch Round Regressed Down Light

When choosing a recessed fixture, eliminating glare is a priority. The unique positioning of the LED module in this series of downlights will meet that important need.


**PROJECT**  **TYPE** 
**DATE**  **QTY** 
**NOTES**  


**LIGHT DISTRIBUTION**


\*Lumen output measured at 3000K

**QUICK SPECS**

<b>Size</b>	4"
<b>Watts (W)</b>	14W
<b>Delivered lumens*</b>	1100
<b>CRI</b>	90
<b>Voltage (v)</b>	120V
<b>Beam angle (deg)</b>	40
<b>Cut hole size (in)</b>	3-1/2"
<b>Lifespan (hrs)</b>	50000
<b>FT rating</b>	FT6
<b>Binning</b>	3 SDCM
<b>LED model</b>	COB
<b>Color temperature</b>	2700K/3000K/3500K/4000K/5000K

**ELECTRICAL DETAILS**

<b>Environment</b>	Wet
<b>Location</b>	Indoor/Outdoor
<b>Operating temp. (° C)</b>	-20 to 40
<b>IP rating</b>	IP44
<b>Input voltage</b>	108-135V
<b>Output voltage</b>	35
<b>Output current</b>	330
<b>Power factor</b>	99
<b>Driver type</b>	Constant current
<b>THD</b>	<30%
<b>Certifications</b>	ETL, FCC, ICES, ES, T24/JA8
	IC, ASTM E283-04

**ORDERING GUIDE**

RGR4-CC	-	<input type="text"/>	-	<input type="text"/>
		<i>Voltage</i>		<i>Finish</i>
		<b>BLANK</b> - 120v Triac dimming		<b>WH</b> - White <input type="radio"/>
		<b>V</b> - 120-277-347V 0-10v dimming		<b>SN</b> - Satin nickel <input type="radio"/>
				<b>BK</b> - Black <input type="radio"/>

**CONSTRUCTION**

<b>Lens</b>	Acrylic
<b>Optic type</b>	Optical lens
<b>Lens material</b>	Acrylic
<b>Finish type</b>	Matte
<b>Housing material</b>	Aluminum

**WHAT'S IN THE BOX**

LED recessed fixture  
 Junction box  
 3x Push-in wire connectors  
 Mounting hardware  
 Instruction sheet

**ACCESSORIES**

[RFP-35](#)  
 Drilling plate

**ADAPTORS**

[REC-CC-EXT8FT](#)  
 96" extension cord for recessed fixtures  
  
[REC-CC-EXT20FT](#)  
 240" extension cord for recessed fixtures

**RECOMMENDED DIMMER LIST\***

BRAND	MODEL	DIMMER SPECS	GRADE	MIN	MAX	MAX LOAD
Dals	SM-DIMSW Smart Dimmer*	Triac, 250W LED/CFL	Compatible	10	100	18
Lutron	DVCL-153PR-WH-C*	Triac, 150 W Dimmable CFL/LED	Compatible	8	99	11
Lutron	CTCL-153PDH-WH-C*	Triac, 150 W Dimmable CFL/LED	Compatible	8	99	11
Lutron	STCL-153PH-WH-C*	Triac, 150 W Dimmable CFL/LED	Compatible	1	99	11
Lutron	MACL-153MRHW-WHC*	Triac, 150 W Dimmable CFL/LED	Compatible	1	98	11
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	8	70	21
Lutron	MA-PRO-WH*	ELV, 250W LED/CFL	Compatible	0	99	18
Lutron	Caseta PD-6WCL-WH-R-C*	Triac, 300W Dimmable CFL/LED	Compatible	3	99	11
Lutron	Caseta PD-5NE-WH-C*	ELV, LED—up to 250 W	Compatible	4	99	18
Lutron	Caseta PD-10NXD-WH*	Triac, LED—up to 250 W	Compatible	1	98	18
Leviton	6674*	Triac, 150 W Dimmable CFL/LED	Compatible	12	99	11
Leviton	PL06-10Z*	Triac, 150 W Dimmable CFL/LED	Compatible	10	99	11
Leviton	DSL06-1LZ*	Triac, 150 W Dimmable CFL/LED	Compatible	10	99	11
Leviton	D26HD-742-1RW*	Triac, 300W LED/CFL	Compatible	11	99	21
Legrand	RHCL453PNICCV4*	Triac, 450W Dimmable CFL/LED	Compatible	9	99	32
Legrand	RHL373PW*	Triac, 250W LED	Compatible	2	98	18
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	0	99	9
Control 4	C4-FPD120-WH	Triac, 200W LED	Compatible	0	99	14
TP-Link	HS220*	Triac, 150 W, Dimmable LED (MLV)	Compatible	3	99	11

**WARRANTY**

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to [info@dals.com](mailto:info@dals.com).