



DALS LIGHTING

Canada
80, de la Seigneurie blvd., E.
Blainville, Quebec J7C 4N1


U.S.A.
4383, NW 124th Ave.,
Coral Springs, Florida 33065

877.430.1818
info@dals.com
dals.com

MODEL LNR24-CC-V

NAME Boulevard

24" Multi-Voltage Recessed Light
The Boulevard series, an architectural recessed lighting channel that can be installed in a wide range of commercial and residential environments. Add depth to ceiling planes with a visible separation, or seamlessly daisy chained.

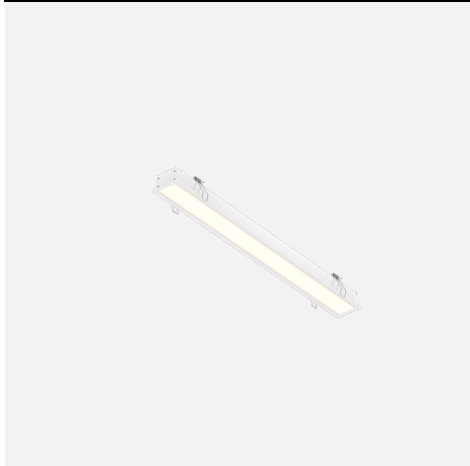


PROJECT

TYPE


DATE

QTY

NOTES

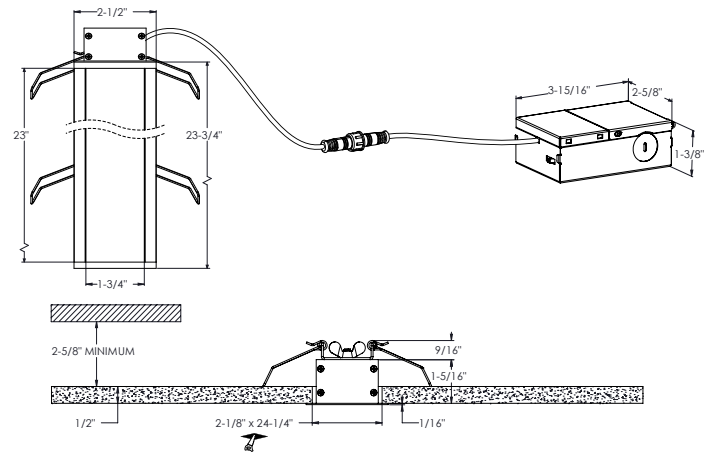

LIGHT DISTRIBUTION

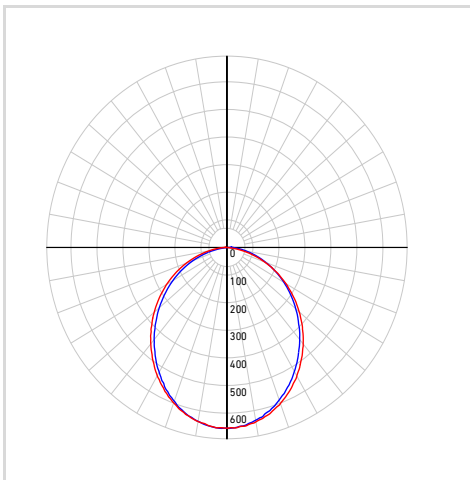

*Lumen output measured at 3000K

QUICK SPECS

Size	24"
Watts (W)	20
Delivered lumens*	1725
CRI	90
Voltage (v)	120/277/347
Beam angle (deg)	105
Cut hole size (in)	2 1/8 x 23 1/4
Lifespan (hrs)	50 000
FT rating	FT6
Binning	3 SDCM
LED model	SMD 2835
Color temperature	2700K/3000K/3500K/4000K/5000K

ELECTRICAL DETAILS

Environment	Dry
Location	Indoor
Operating temp. (° C)	-20 to 40
IP rating	IP20
Input voltage (V)	120-347
Output voltage (V)	40-44
Output current (mA)	470
Power factor (%)	99
Driver type	Constant current
THD	≤ 30%
Certifications	ETL, FCC, ICES, ES, IC, ASTM E283-04, T20 T24

ORDERING GUIDE

LNR24-CC-V

-

Finish

WH - White



CONSTRUCTION

Lens material	PC
Optic type	Frosted
Finish type	Matte
Housing material	Aluminum

WHAT'S IN THE BOX

- LED recessed fixture
- Junction box
- 3x Push-in wire connectors
- Mounting hardware
- Instruction sheet

ACCESSORIES

[RFP-LNR24](#)

Drilling plate

ADAPTORS

[REC-CC-EXT8FT](#)

96" extension cord for recessed fixtures

[REC-CC-EXT20FT](#)

240" extension cord for recessed fixtures

RECOMMENDED DIMMER LIST*

[illegible]

*With Low-End Adjustment Feature

Minimal buzzing noise may occur with some dimmers

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.