

DALS LIGHTING

Canada 80, de la Seigneurie blvd., E. Blainville, Quebec J7C 4N1

U.S.A. 4383, NW 124th Ave., Coral Springs, Florida 33065 877.430.1818 info@dals.com dals.com

MODEL NAME

RTJB4-3K


ALTER

4-Inch Recessed Retrofit

Our LED retrofit panels provide the perfect solution for your renovations. There's no need to completely change your current lighting, simply use these innovative products and retrofit your existing installation.






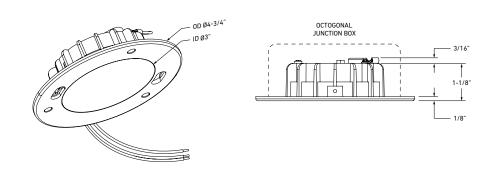

QUICK SPECS	•						
SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	FINISH
4"	9W	550lm	3000K	90	120V	149°	White

Wet

ALUCY CDECC



CONSTRUCTION	Lens	Type of optics	Type of LED
	Frosted	Flat lens	SMD
	Lens material Acrylic	Housing material Cast aluminum	Cut hole size 4" or Octo Jbox
RATINGS	Placement	Lifespan	FT rating
	Indoor/Outdoor	50,000 hrs.	-
	Location	Certifications	Operating

WHAT'S IN THE BOX

LED recessed fixture Mounting hardware Instruction sheet

ACCESSORIES

RTJB4-ACC

4" Can Kit - Clips and E26 Socket

RTJB4-TRIM-BK

Recessed Panel Trim

SM-DIMSW

Smart Dimmer Switch

ADAPTERS

ETL, FCC, ICES, ES

IC, ASTM E283-04, T24

temperature

-20° to 40° C

^{*}Lumen output measured at 3000K



nada

80, de la Seigneurie blvd., E. Blainville, Quebec J7C 4N1

U.S.A. 4383, NW 124th Ave., Coral Springs, Florida 33065 877.430.1818 info@dals.com dals.com

ELECTRICAL DETAILS

Input voltage 108-132V Output current 520mA Power factor

Driver typeConstant current

Output voltage

115V

LED model # 2835

THD harmonic distortion <30%

Binning type 3 SDCM

FEATURES

Integrated driver

Superior LED performance and lifespan

Fits into 4" recessed housings (accessories sold separetely)

Fits on octagonal junction boxes

Fire rated alternative when mounted onto a fire rated junction box

Magnetic trim finish

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST*									
BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%) MIN MAX	MAX LOAD				
Lutron	Caseta PD-10NXD-WH	Triac, LED—up to 250 W	Compatible	0 84	28				
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	0 59	33				
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	0 84	28				
Leviton	6672-1LW	Triac, 150W Dimmable CFL/LED	Compatible	0 90	17				
Leviton	D26HD-742-1RW	Triac, 300W LED/CFL	Compatible	0 97	33				
Legrand	ADTP703TUM4	Triac,450W Dimmable CFL/LED	Compatible	0 67	50				
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	0 98	13				
Control 4	C4-FPD120-WH	Triac, 200W LED	Compatible	0 95	22				

^{*} Minimal buzzing noise may occur with some dimmers