




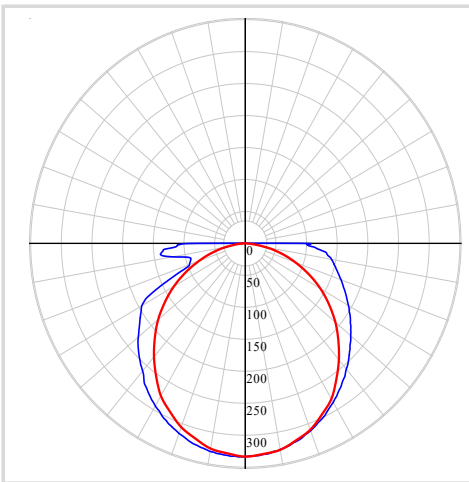
MODEL SSFM20-CC

NAME Asterisk

Three branches flush mount

Presenting another addition to the Asterisk collection—a clean, modern, three-armed flush mount fixture that adds a touch of contemporary elegance to any room.


PROJECT
TYPE
DATE
QTY
NOTES


LIGHT DISTRIBUTION


*Lumen output measured at 3000k

QUICK SPECS

| | |
|--------------------------|-------------------------------|
| Size | 22-3/4" |
| Watts (W) | 15 |
| Delivered lumens* | 1060 |
| CRI | 80 |
| Voltage (v) | 120 |
| Beam angle (deg) | 120 |
| Mounting | Screwed in |
| Lifespan (hrs) | 50 000 |
| Binning | 5 SDCM |
| LED model | SMD 2835 |
| Light direction | Up and down |
| Color temperature | 2700K/3000K/3500K/4000K/5000K |

ELECTRICAL DETAILS

| | |
|------------------------------|------------------|
| Environment | Dry |
| Location | Indoor |
| Operating temp. (° C) | -20 to 40 |
| IP rating | IP20 |
| Input voltage (V) | 120 |
| Output voltage (V) | 35V |
| Output current (mA) | 400 |
| Power factor | 90 |
| Driver type | Constant current |
| THD | ≤ 30% |
| Certifications | ETL, FCC, ICES |

ORDERING GUIDE

 SSFM20-CC -
Finish
BK - Black

CONSTRUCTION

| | |
|-------------------------|----------|
| Lens material | PC |
| Lens type | Frosted |
| Finish type | Painted |
| Housing material | Aluminum |

| WHAT'S IN THE BOX | ACCESSORIES | ADAPTORS |
|--|-------------|----------|
| <ul style="list-style-type: none"> LED flush mount fixture Mounting bracket Mounting hardware Wire nuts Instruction sheet | | |

RECOMMENDED DIMMER LIST*

| BRAND | MODEL | DIMMER SPECS | GRADE | MIN | MAX | MAX LOAD |
|---------------------|----------------------|------------------------------------|------------|-----|-----|----------|
| Lutron | DVELV-300P-WH | 300W electronic low voltage dimmer | Compatible | 6 | 96 | 20 |
| Lutron | MA-PRO-WH* | ELV, 250W LED/CFL | Compatible | 0 | 98 | 17 |
| Lutron | Caseta PD-10NXD-WH* | Triac, LED—up to 250 W | Compatible | 0 | 99 | 17 |
| Leviton | D26HD-742-1RW* | Triac, 300W LED/CFL | Compatible | 0 | 100 | 20 |
| Legrand | ADTP703TUM4* | Triac, 450W Dimmable CFL/LED | Compatible | 13 | 100 | 30 |
| Legrand | ADPD453LM2* | Triac, 450W Dimmable CFL/LED | Compatible | 12 | 99 | 30 |
| Legrand | RHL373PW* | Triac, 250W LED | Compatible | 2 | 99 | 17 |
| Control 4 | C4-APD120-WH | ELV, 120W LED | Compatible | 0 | 100 | 8 |
| Control 4 | C4-FPD120-WH | Triac, 200W LED | Compatible | 0 | 100 | 13 |
| Commercial Electric | HPDA311CWB* | Triac, 150W LED & CFL | Compatible | 0 | 100 | 10 |
| TP-Link | HS220* | Triac, 150 W, Dimmable LED (MLV) | Compatible | 2 | 100 | 10 |

*With Low-End Adjustment Feature

Minimal buzzing noise may occur with some dimmers

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DAL'S customer service call 1-877-430-1818 or send an e-mail to info@dals.com.