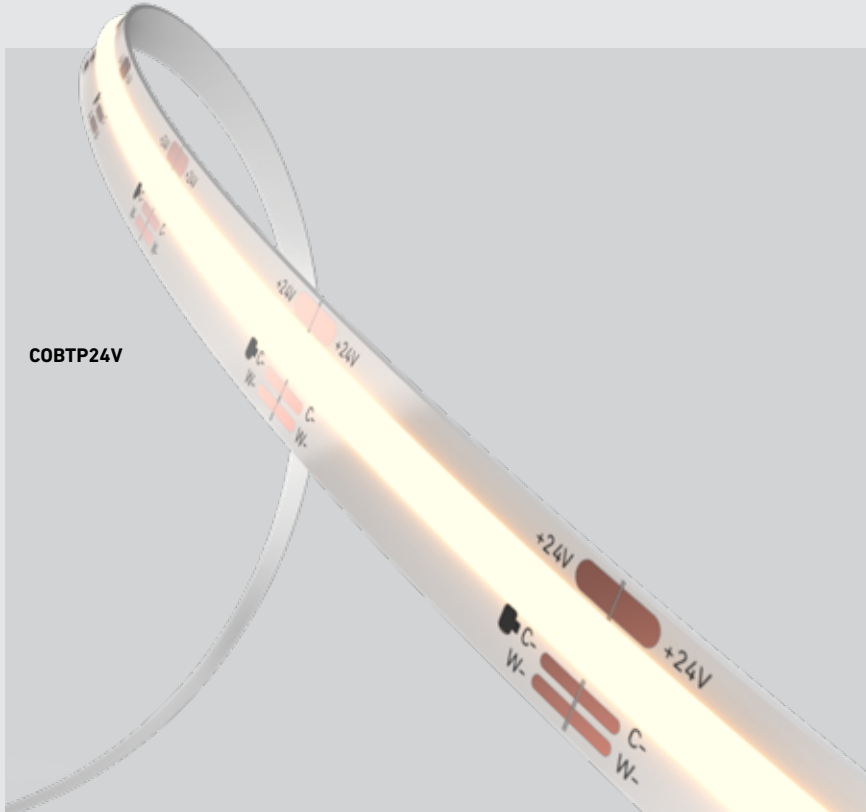# 24V COB TAPE
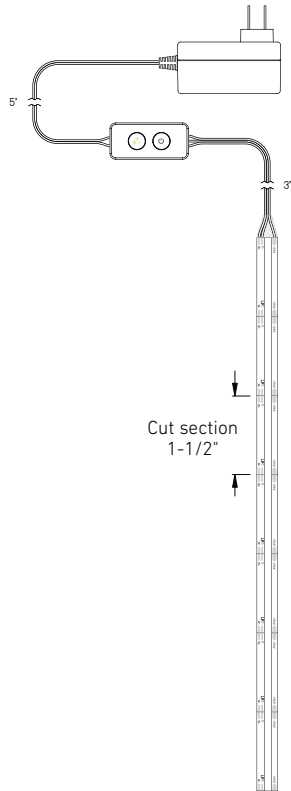
Our 24V COB tape light with 5CCT adjustability delivers a smooth, dot-free glow, five versatile color temperature options, and minimized voltage drop for consistent performance in any space or ambiance.

COLOR TEMPERATURE
2700k 3000k 3500k 4000k 5000k

DRY

24V VOLTAGE

ETL Intertek

COBTP24V

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
COBTP24V-K10FT-CC	10' (3m)	18 W	1590 lm	90	2700 K/ 3000 K/ 3500 K/ 4000 K/ 5000 K	24 V
COBTP24V-K20FT-CC	20' (6m)	36 W	3180 lm			
COBTP24V-R50FT-CC*	50' (15m)	1.8 W /foot	160 lm /foot			
COBTP24V-R100FT-CC*	100' (30m)	1.8 W /foot	160 lm /foot			

*50m and 100m 24V COB reels do not include a driver.
Plug-in or hard-wired power supply required for installation. Sold separately.

COBTP24V-K10FT-CC	1 x 10' (3m) kit
COBTP24V-K20FT-CC	1 x 20' (6m) kit
COBTP24V-R50FT-CC Reel only, driver not included	1 x 50' (15m)
COBTP24V-R100FT-CC Reel only, driver not included	1 x 100' (30m)

5'

3'

Cut section
1-1/2"

Specifications

24V DC LED plug-in driver included for
10- and 20-foot kits only
(10 feet = 30W / 20 feet = 60W)

Seamless light emission (190 LEDs/foot)

Includes a wired remote with selectable CCT
and on/off functionality for 10- and 20-foot
kits only

Quick-connect assembly for easy installation

Self adhesive

Can be cut at every cut mark (every 1-1/2")

Maximum run of 40 feet

5-year warranty

Power supplies: plug-in

COBTP24V-ETR30
24V DC/30W class 2 LED driver

COBTP24V-ETR60
24V DC/60W class 2 LED driver

Power supplies: hard-wired

DR2412DIM
12W 24V dimmable hardwired driver

DR2424DIM
24W 24V dimmable hardwired driver

DR2448DIM
48W 24V dimmable hardwired driver

DR2460DIM
60W 24V dimmable hardwired driver

DR2496DIM
96W 24V dimmable hardwired driver

Accessories

COBTP24V-ACCI
I-shaped connector (strip-to-strip)

COBTP24V-ACCL
L-shaped connector (strip-to-strip)

COBTP24V-EXT24
24" extension cable

COBTP24V-EXT60
60" extension cable

COBTP24V-EXT120
120" extension cable

COBTP24V-CC36
36" extension cable (strip-to-controller)

COBTP24V-SWT
CCT controller with on/off functionality

COBTP-ALXT-L5M-BK
5 meter black lens for extrusions

COBTP-ALXT-L5M-WH
5 meter white lens for extrusions