



# DALS LIGHTING

Canada  
80, de la Seigneurie Blvd., E.  
Blainville, Quebec J7C 4N1

U.S.A.  
4383, NW 124th Ave.,  
Coral Springs, Florida 33065

877.430.1818  
info@dals.com  
dals.com

**MODEL** DSWC07-CC-V

**NAME** Shield



7" Multi-voltage DarkSky Wall Sconce

This 7" DarkSky compliant wall fixture offer focused, energy-efficient illumination while minimizing light pollution, making them ideal for environmentally conscious outdoor spaces.


**PROJECT** \_\_\_\_\_ **TYPE** \_\_\_\_\_

**DATE** \_\_\_\_\_ **QTY** \_\_\_\_\_

**NOTES**

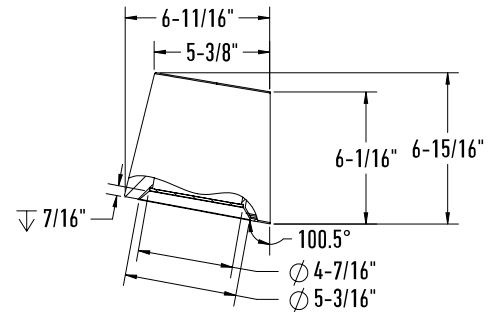

## LIGHT DISTRIBUTION

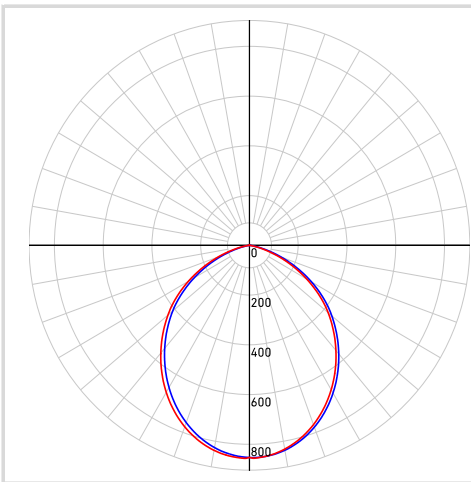

\*Lumen output measured at 3000k

## QUICK SPECS

<b>Size</b>	7"
<b>Watts (W)</b>	24
<b>Delivered lumens*</b>	2000
<b>CRI</b>	90
<b>Voltage (v)</b>	120/277
<b>Beam angle (deg)</b>	100
<b>Mounting</b>	Screwed in
<b>Lifespan (hrs)</b>	50 000
<b>Binning</b>	5 SDCM
<b>LED model</b>	SMD 2835
<b>Light direction</b>	Down
<b>Color temperature</b>	2200,2700,3000,3500,4000K

## ELECTRICAL DETAILS

<b>Environment</b>	Wet
<b>Location</b>	Outdoor
<b>Operating temp. (° C)</b>	-30 to 40
<b>IP rating</b>	IP54
<b>BUG rating</b>	B1-U0-G0
<b>Input voltage (V)</b>	120-347
<b>Output voltage (V)</b>	36
<b>Output current (mA)</b>	600
<b>Power factor</b>	99
<b>Driver type</b>	Constant current
<b>THD</b>	≤ 15%
<b>Certifications</b>	ETL, FCC, ICES, DarkSky

## ORDERING GUIDE

DSWC07-CC-V - \_\_\_\_\_  
Finish  
**BK** - Black

## CONSTRUCTION

<b>Lens material</b>	Glass
<b>Lens type</b>	Frosted
<b>Finish type</b>	Powder painting
<b>Housing material</b>	Aluminum

