NEW

EXCEL

LED panel lights are more accessible than ever before. The sleek and minimal construction allows for the easiest of installations.


DCP-PNLX



5004SQ-CDW



5004-CDW

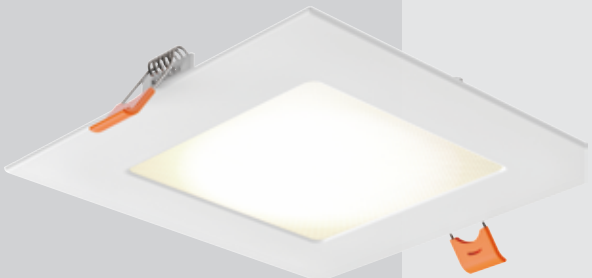

COLOR SELECT +

WET

OPTI-COMFORT LENS†

FIRE RATED*

AIR TIGHT

IC RATED

T24 JA8 CERTIFIED

COASTAL RATED†

Intertek

Bluetooth††

CHANGE COLORS††

ENERGY STAR

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
5003-CDW	3"	7 W	575 lm	90	5CCT: 2700, 3000, 3500, 4000, 5000K + Dim-to-Warm (3000 - 2200K)	120 V
5004-CDW	4"	10 W	900 lm			
5004SQ-CDW	4"	10 W	860 lm			
5005-CDW	5"	12 W	1000 lm			
5006-CDW	6"	14 W	1220 lm			
5006SQ-CDW	6"	14 W	1150 lm			
5004-FR-CC	4"	11 W	960 lm	90	2700, 3000, 3500, 4000, 5000 K	
DCP-PNL4	4"	14 W	750 lm	90	RGB + 2700 K - 6500 K	

*Model 5004-FR-CC only.
2-hour fire-rated without additional housing or hardware, in accordance with UL 263, ASTM E119, and CAN ULC S101.

†Designed to withstand salty air. 480h salt spray test approved.Equivalent to 6.5 years in coastal environment. (CDW Models only).

††Model DCP-PNL4 only.

5003-CDW Ø3-3/8"



5004-CDW Ø4-1/4"



5005-CDW Ø5-3/8"



5006-CDW Ø6-3/8"



5004SQ-CDW Ø4-1/2"



5006SQ-CDW Ø6-3/8"



5004-FR Ø4-1/4"



DCP-PNL4 Ø4-1/4"



Specifications

Junction box with integrated driver included

Switch-selectable CCT

Full color spectrum and 2700–6500K in pure whites (DCP-PNL4 only)

Dimmable via the DALS Connect app and the DCP-RMCT remote (DCP-PNL4 only)

360° light distribution

Opti-Comfort anti-glare lens technology for enhanced visual comfort (CDW models only)

Edge lit technology

Very low profile

Aluminum construction

Designed to withstand salty air (CDW models only)

Daisy-chain compatible

5-year warranty

Finish

- ● **BK** Black (3", 4" Round, 4" Square and 6" CDW)
- ○ **WH** White

Accessories

RACC-TRIM3/4/6-SN
3", 4", 6" trim in satin nickel for 5003-CDW / 5004-CDW / 5006-CDW

RACC-TRIM5-BK/SN
5" trim in black / satin nickel for 5005-CDW

RACC-TRIM4SQ/6SQ-SN
4" / 6" square trim in satin nickel for 5004SQ-CDW / 5006SQ-CDW

DCP-PNL4-TRIM-BK
4" trim in black for DCP-PNL4

REC-RFP-UNI
Universal rough-in plate for 5003 / 5004 / 5006 / DCP-PNL4

REC-RFP-13/REC-RFP-DOUBLE23
Rough-in plates for 5003

REC-RFP-4/REC-RFPE4
Rough-in plates for 5004-CDW

RFP-58
Rough-in plates for 5005-CDW

REC-RFP-6/REC-RFPE6
Rough-in plates for 5006-CDW

REC-CDW-EXT8/20FT
8 ft and 20 ft extension cables for CDW series

REC-CC-EXT8/20FT
8 ft and 20 ft extension cables for FR series

REC-3K-EXT8/20FT
8 ft and 20 ft extension cables for DCP series

DCP-RMCT
Smart remote for DCP-PNL4

DCP-HUBV2
DALS Connect PRO Hub for DCP-PNL4

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALS representative for more information.